


APPLICATION

REVISIONS

QTY	MODEL USED ON	ASSY NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	HFRR-4		X	EXPERIMENTAL RELEASE	9/6/68		C.V.	<i>[Signature]</i>	
			Ø	ORIG. RELEASE FOR PROD.	10-27-68	Ø	R.G.	<i>[Signature]</i>	
			A	DIM. OUTLINE ADDED	3/25/69	19351	CV	<i>[Signature]</i>	

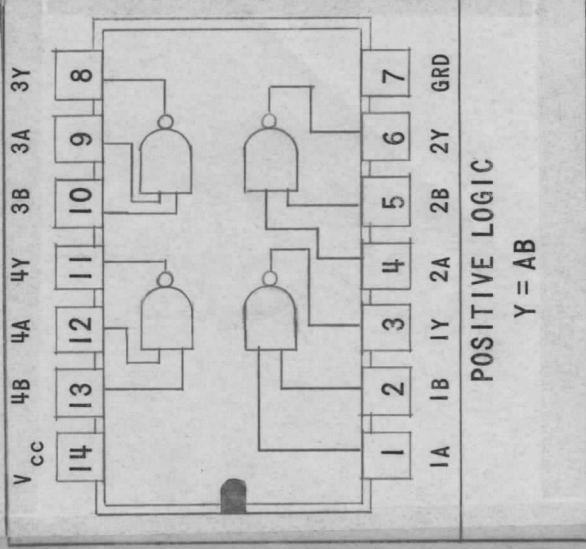

RECOMMENDED OPERATING CONDITIONS:

SUPPLY VOLTAGE Vcc: 4.75V TO 5.25V

ELECTRICAL CHARACTERISTICS:


TA = 0°C TO 70°C

POSITIVE LOGIC

Y = AB

NOTES: A. The true-position pin spacing is 0.100 between centerlines. Each pin centerline is located within  $\pm 0.010$  of its true longitudinal position relative to pin ① and ⑭.

B. All dimensions in inches unless otherwise noted.

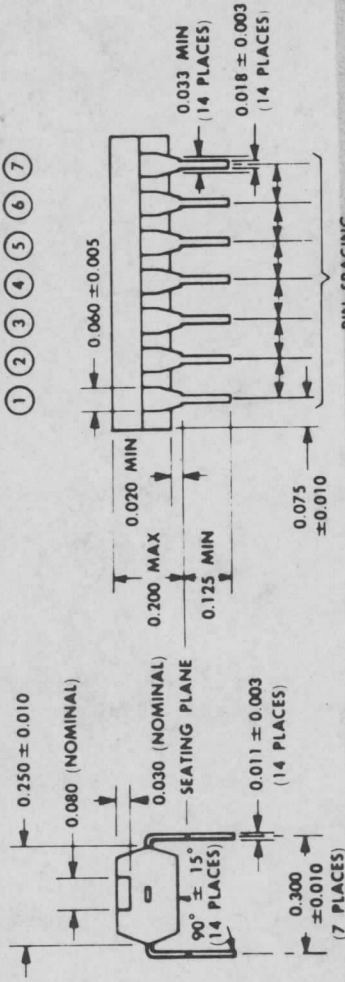

PIN SPACING  
SEE NOTE A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D ITEM	PART NUMBER	DESCRIPTION	SYMBOL
DECIMALS	S. DEMARCO		LIST OF MATERIAL	
FRACTIONS			THE TECHNICAL MATERIEL CORP.	
.X ± .05 TOLS.	FINAL APPROVAL		MAMARONECK, NEW YORK	
.XX ± .01 ANGLES	MECH. DES.		NETWORK, QUADRUPLE 2-INPUT	
.XXX ± .005 0° .30'	ELECT. DES.		POSITIVE NANDGATE	
MATERIAL	CHECKED			
FINISH	DRAWN			
S401-265 (SN7400N)	DATE 10-22-68			
	DATE 10/24/68			
	DATE 1/6/69			
NOTICE TO PERSONS RECEIVING THIS DRAWING	SIZE A	CODE IDENT. NO. 82679	DWG NO. NW 176	ISSUE A
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown herein without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.	SCALE	SHEET	OF	