


APPLICATION


REVISIONS

QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RSU-1		Ø	ORIGINAL RELEASE	12-872		EF		

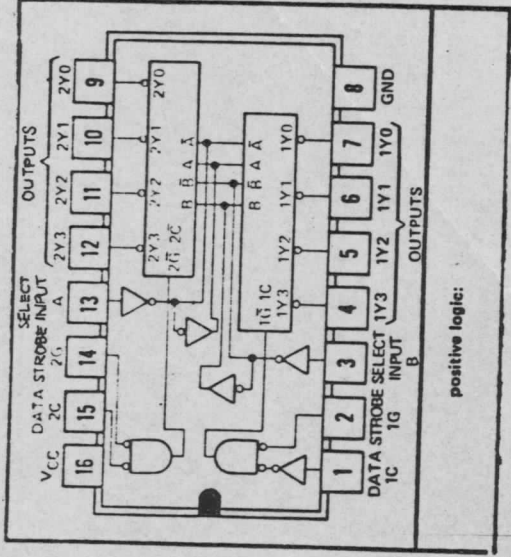

RECOMMENDED OPERATING CONDITIONS:
 SUPPLY VOLTAGE Vcc: 4.75V TO 5.25V
 ELECTRICAL CHARACTERISTICS:
 TA = 0°C TO 70°C

16-PIN PLASTIC DUAL-IN-LINE N-PACKAGE OUTLINE

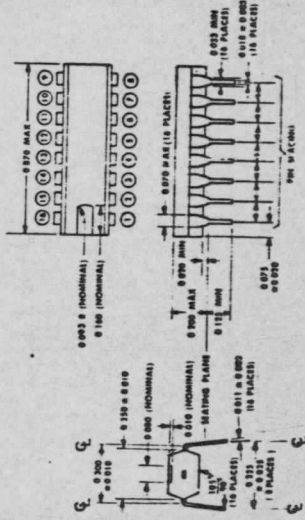

- NOTES:
- a. The true-position pin spacing is 0.100 between centerlines. Each pin centerline is located within ± 0.010 of its true longitudinal position relative to pins 1 and 16.
 - b. All dimensions are in inches unless otherwise noted.

5401-265(SN74155N)

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
LIST OF MATERIAL			
THE TECHNICAL MATERIEL CORP.			
MAMARONECK, NEW YORK			
NETWORK, DUAL 2 LINE TO 4 LINE DECODER/DEMULTIPLEXER			
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	NW186	Ø
SCALE	SHEET	OF	

0. POSE
 FINAL APPROVAL
 MECH. DES.
 ELECT. DES.
 CHECKED
 DRAWN GE
 DATE 12-7-72

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is prepared for mutual assistance and is subject to recall at any time.