



APPLICATION		REVISONS							
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RSU-1		Ø	ORIGINAL RELEASE	12-8-72		EF		

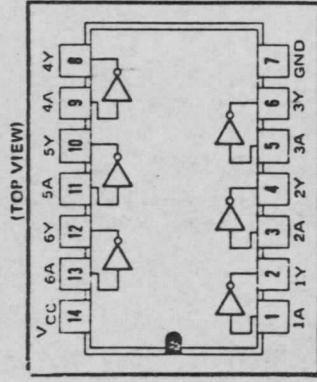

RECOMMENDED OPERATING CONDITIONS:
SUPPLY VOLTAGE V_{CC}: 4.75V TO 5.25V
ELECTRICAL CHARACTERISTICS:
T_A = 0°C TO 70°C

14-PIN PLASTIC DUAL-IN-LINE N-PACKAGE OUTLINE

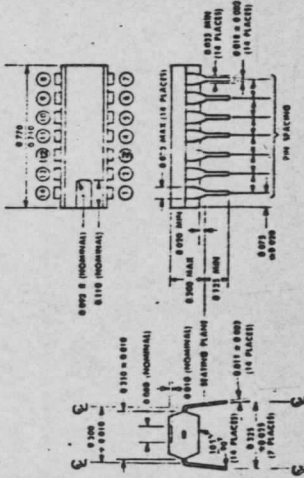

NOTES: a. The true-position pin spacing is 0.100 between centerlines. Each pin centerline is located within ± 0.010 of its true longitudinal position relative to pins ④ and ①.
 b. All dimensions are in inches unless otherwise noted.

5401-265 (SN7404N)

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
LIST OF MATERIAL			
THE TECHNICAL MATERIEL CORP.			
MAMARONECK, NEW YORK			
NETWORK, HEX INVERTERS			
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	NW187	Ø
SCALE		SHEET	OF

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.