


APPLICATION

REVISIONS


QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RSU-1		Ø	ORIGINAL RELEASE	12-8-72		ej		

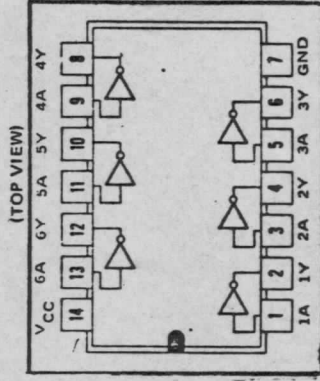

POSITIVE LOGIC $I = \bar{A}$

RECOMMENDED OPERATING CONDITIONS:
 SUPPLY VOLTAGE V_{CC} : 4.75V TO 5.25V
 ELECTRICAL CHARACTERISTICS:
 $T_A = 0^\circ\text{C TO } 70^\circ\text{C}$

14-PIN PLASTIC DUAL-IN-LINE N-PACKAGE OUTLINE

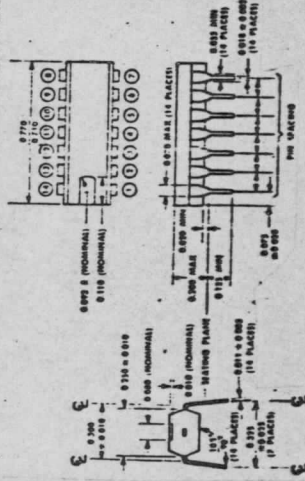

NOTES: a. The true-position pin spacing is 0.100 between centerlines. Each pin centerline is located within ± 0.010 of its true longitudinal position relative to pins ④ and ⑪.

b. All dimensions are in inches unless otherwise noted.

5401-265 (SN7405N)

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
LIST OF MATERIAL			
O. POSE			
FINAL APPROVAL	DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK <i>NETWORK, HEX INVERTER</i> <i>(OPEN COLLECTOR OUTPUT)</i>	
MECH. DES.	DATE		
ELECT. DES.	DATE		
CHECKED	DATE		
DRAWN	DATE		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SIZE	DWG NO.
DECIMALS	FRACTIONS	A	82679
.X ± .05	1/64	SCALE	
.XX ± .01	ANGLES		
.XXX ± .005	0°-30°	SHEET OF	
MATERIAL			
FINISH		ISSUE	
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.			
		Ø	