


APPLICATION		REVISIONS							
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RSU-1		Ø	ORIGINAL RELEASE	12-8-72		Ø		


TOP VIEW

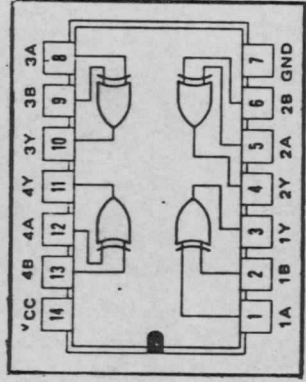

RECOMMENDED OPERATING CONDITIONS:
 SUPPLY VOLTAGE V_{CC} : 4.75V TO 5.25V
 ELECTRICAL CHARACTERISTICS:
 $T_A = 0^\circ\text{C TO } 70^\circ\text{C}$

POSITIVE LOGIC $Y = A \oplus B$

14-PIN PLASTIC DUAL-IN-LINE N-PACKAGE OUTLINE

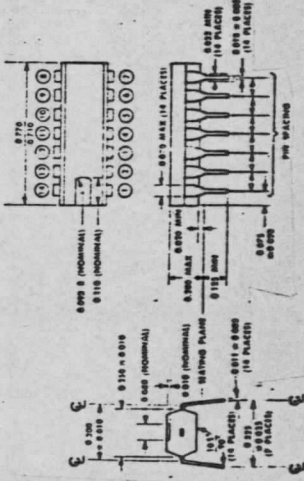

NOTES: a. The true-position pin spacing is 0.100 between centerlines. Each pin centerline is located within ± 0.010 of its true longitudinal position relative to pins ④ and ⑪.
 b. All dimensions are in inches unless otherwise noted.

S401-265(SN74L86N)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	O. POSE		LIST OF MATERIAL	
FRACTIONS 1/64 ANGLES 0°-30'				
MATERIAL	FINAL APPROVAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH	MECH. DES.		NETWORK, QUADRUPLE 2-INPUT EXCLUSIVE OR GATED	
	ELECT. DES.			
	CHECKED			
	DRAWN	GE		
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.				
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE	
A	82679	NW189	Ø	
SCALE			SHEET	OF