APPLICATION			REVISIONS						
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RSU1		Ø	ORIGINAL RELEASE	12-8-72		EP		

TOP VIEW

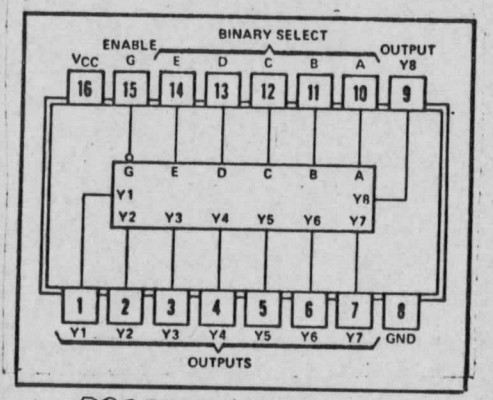

POSITIVE LOGIC

14-PIN PLASTIC DUAL-IN-LINE N-PACKAGE OUTLINE

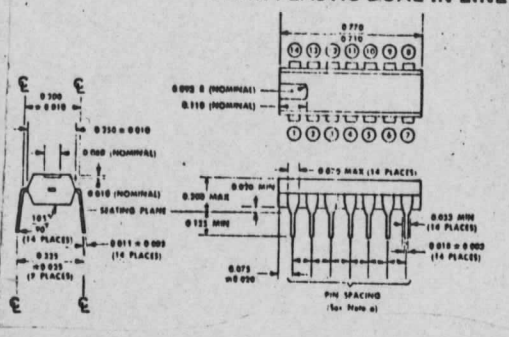

NOTES: a. The true-position pin spacing is 0.100 between centerlines. Each pin centerline is located within ± 0.010 of its true longitudinal position relative to pins (4) and (11).

b. All dimensions are in inches unless otherwise noted.

RECOMMENDED OPERATING CONDITIONS:

SUPPLY VOLTAGE Vcc: 4.75V TO 5.25V

ELECTRICAL CHARACTERISTICS:
T_A = 0°C TO 70°C

S401-265-(SN74184N)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 TOLS. FRACTIONS 1/64 ANGLES 0° 30'	O. POSE			LIST OF MATERIAL	
MATERIAL	FINAL APPROVAL		DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH	MECH. DES.		DATE		
	ELECT. DES.		DATE	NETWORK, BCD-TO-BINARY CONVERTER	
	CHECKED		DATE		
	DRAWN GE		DATE 12/7/72		

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from **THE TECHNICAL MATERIEL CORPORATION** to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	NW191	Ø
SCALE		SHEET	OF

FCI-10-170