APPLICATION			REVISIONS						
QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
1	RSU-1		Ø	ORIGINAL RELEASE	12-8-72		EJ		

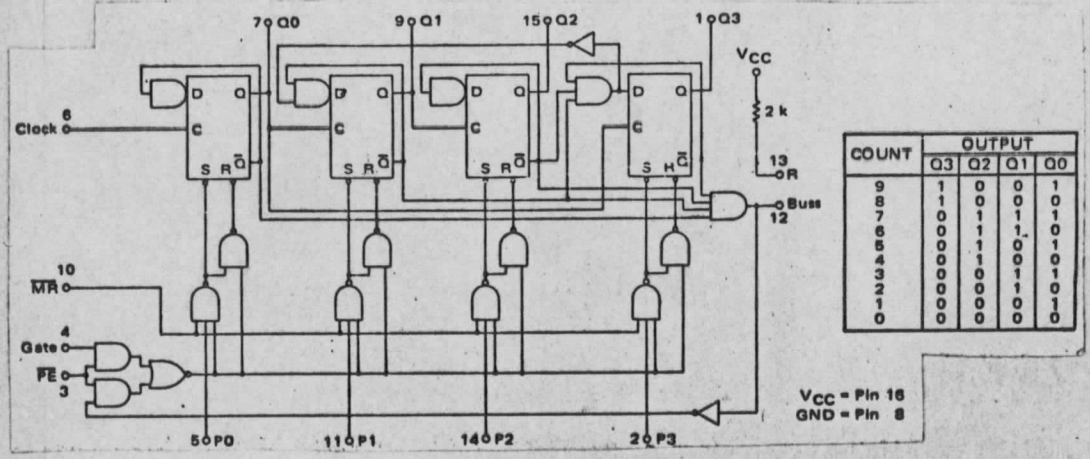

COUNT	OUTPUT			
	Q3	Q2	Q1	Q0
9	1	0	0	1
8	1	0	0	0
7	0	0	1	1
6	0	0	1	0
5	0	0	0	1
4	0	0	0	0
3	0	0	1	1
2	0	0	1	0
1	0	0	0	1
0	0	0	0	0

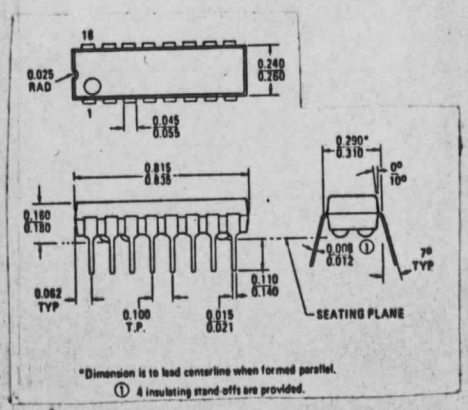

RECOMMENDED OPERATING CONDITIONS:

SUPPLY VOLTAGE Vcc: 4.75V TO 5.25V

ELECTRICAL CHARACTERISTICS:
TA = 0°C TO 75°C

SL401-302-MC4016P

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005 TOLS. FRACTIONS 1/64 ANGLES 0° 30'	O. POSE			LIST OF MATERIAL	
MATERIAL	FINAL APPROVAL		DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH	MECH. DES.		DATE		
	ELECT. DES.		DATE	NETWORK PROGRAMMABLE MODULO-N DECADE CONTR.	
	CHECKED		DATE		
	DRAWN GE		DATE 12/11/72		

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	NW192	Ø
SCALE		SHEET	OF