


		REVISIONS					
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	X1	SEE SHEET (1)	1/20/64				
		ORIGINAL RELEASE FOR PRODUCTION	2/3/64				
	A	2(F) HOLES ADDED, SEE SHEET 1	6-16-64	16380			

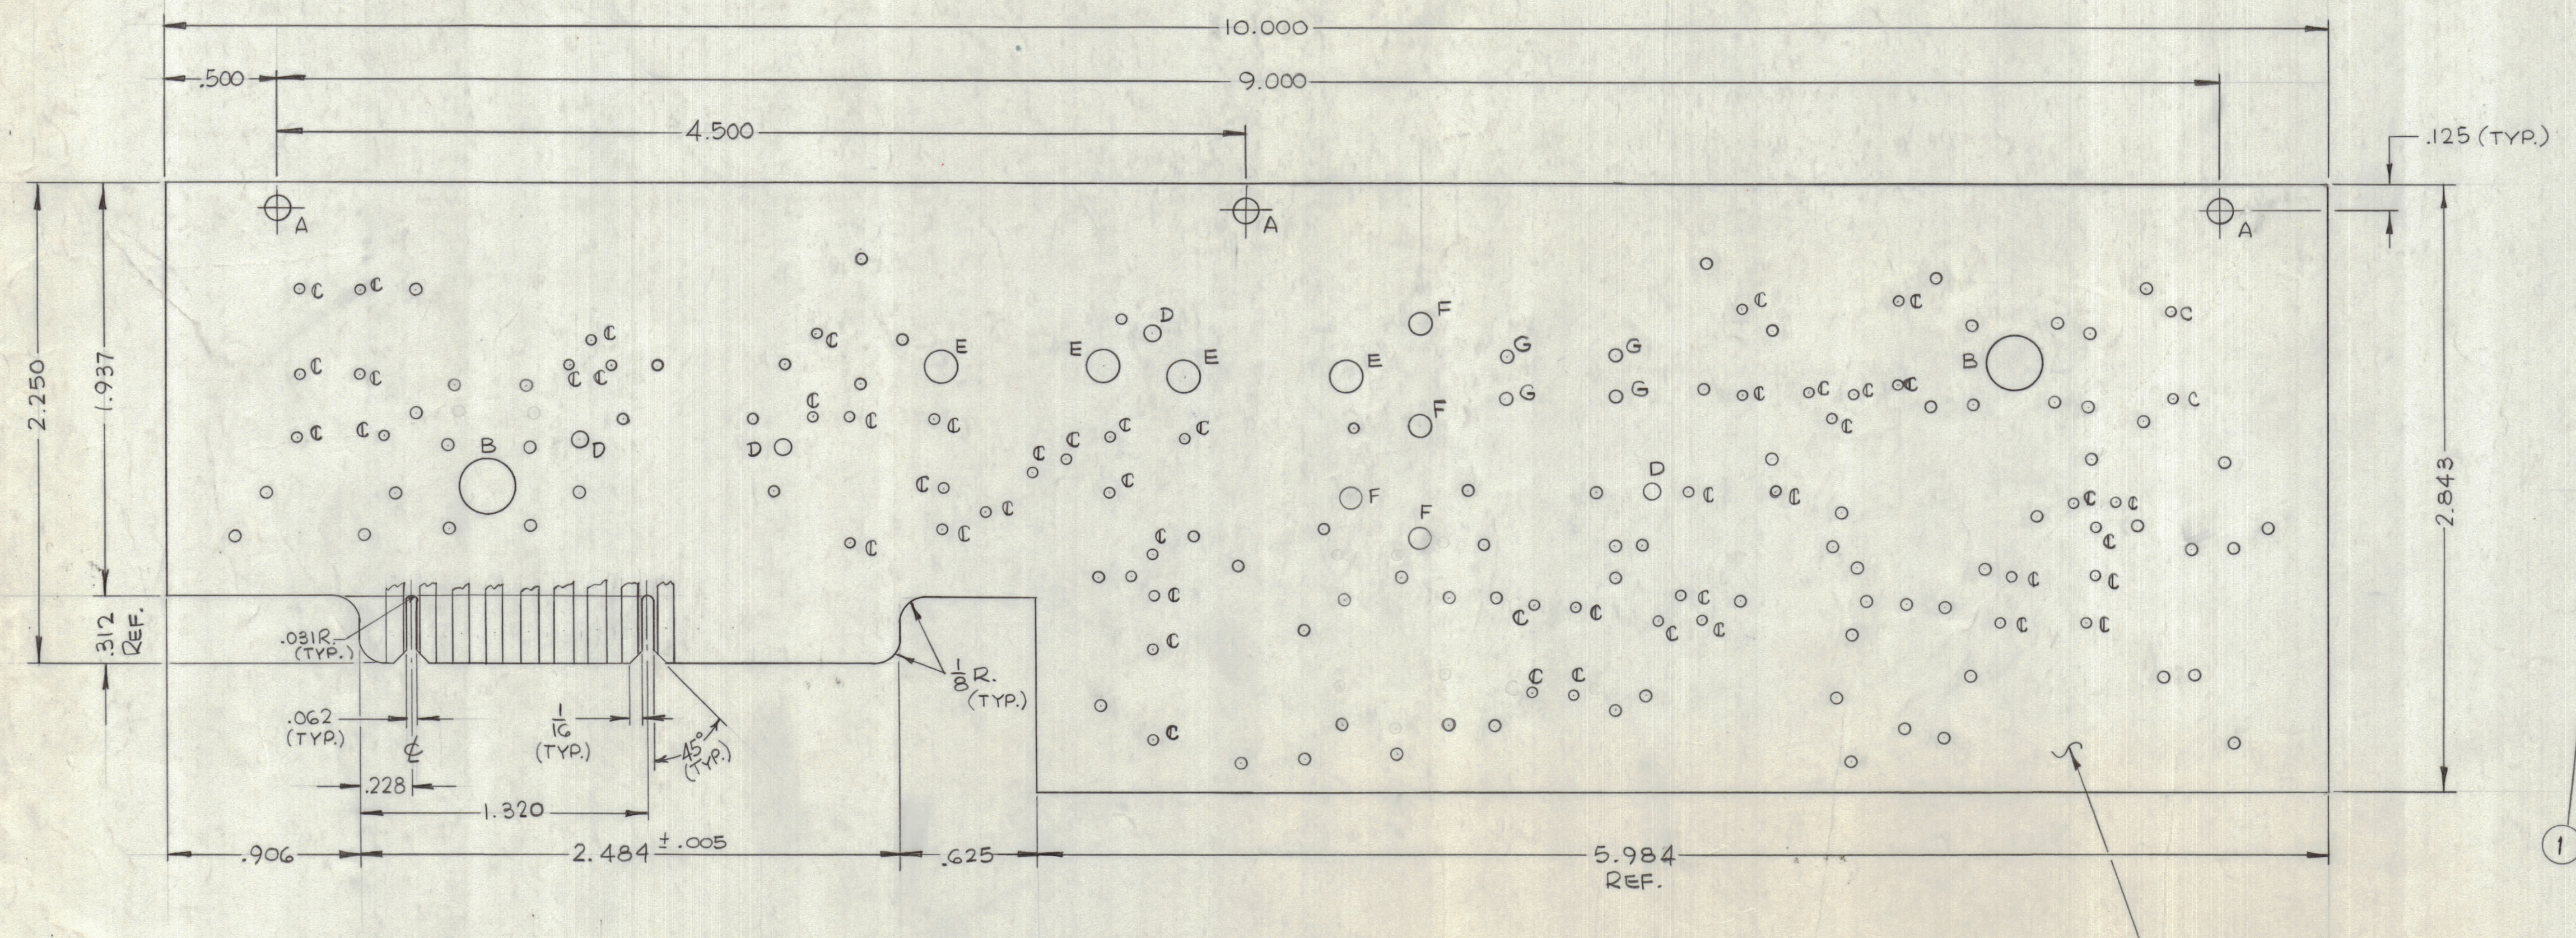

1 MOUNT IN ALL "D" HOLES AS SHOWN.

COMPONENT SIDE

- NOTES:
- MANUFACTURED IN ACCORDANCE WITH TMC SPEC. S-735 AND SPECIFICALLY:
 - OVERALL MATERIAL THICKNESS $.062 \pm .0062$ AS PER (PP 3.1, 3.2)
 - CONDUCTIVE PATTERN TO BE COPPER FOIL AS PER (PP 4.1)
 - EDGE BOARD CONNECTOR FINGERS SHALL BE GOLD PLATED AS PER (PP 10.1, 10.4)
 - COMPONENT SIDE TO BE MARKED AS PER S-727 (FOR MARKING SEE SH. 2 OF 2)
- THIS IS A SINGLE SIDED BOARD.

HOLE	DESCRIPTION	REQ.
A	.125 DIA.	3
B	.265 DIA.	2
C	.040 DIA.	47
D	.081 DIA.	4
E	.156 DIA.	4
F	.109 DIA.	4
G	.062 DIA.	4
	UNMARKED HOLES-.052 DIA.	

PC240
A

QTY/UNIT	CDN-3	A4350
SCALE	2:1	

4	1	TEI27-2	TERMINAL STUD	D
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
LIST OF MATERIAL NC-100-2 (12A400)				
MATERIAL		SEE NOTES		
FINISH		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
TITLE		PRINTED CIRCUIT BOARD NOISE CHANNEL		
DRAWN	H. AUSTIN	DATE	11-23-65	FINAL APPROVAL
CHECKED		DATE		
ELECT. DES.		DATE	3-3-66	
MECH. DES.		DATE		
DECIMALS		TOLERANCES		
.X ± .05		± 1/64		
.XX ± .01		ANGLES ± 0° 30'		
.XXX ± .005		FRACTIONS		
		± 0° 30'		
		SHEET 2 OF 2		
		REV. LTR.		

NOTES