


REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	X1	REVISED LOCATIONS OF (4) 'A' HOLES & (8) UNMARKED HOLES, SEE SHEET-1	1/2/66		JL		
	X2	Item (1) was 1 REQ	1-26-66				
	Ø	ORIGINAL RELEASE FOR PRODUCTION	2/3/66				

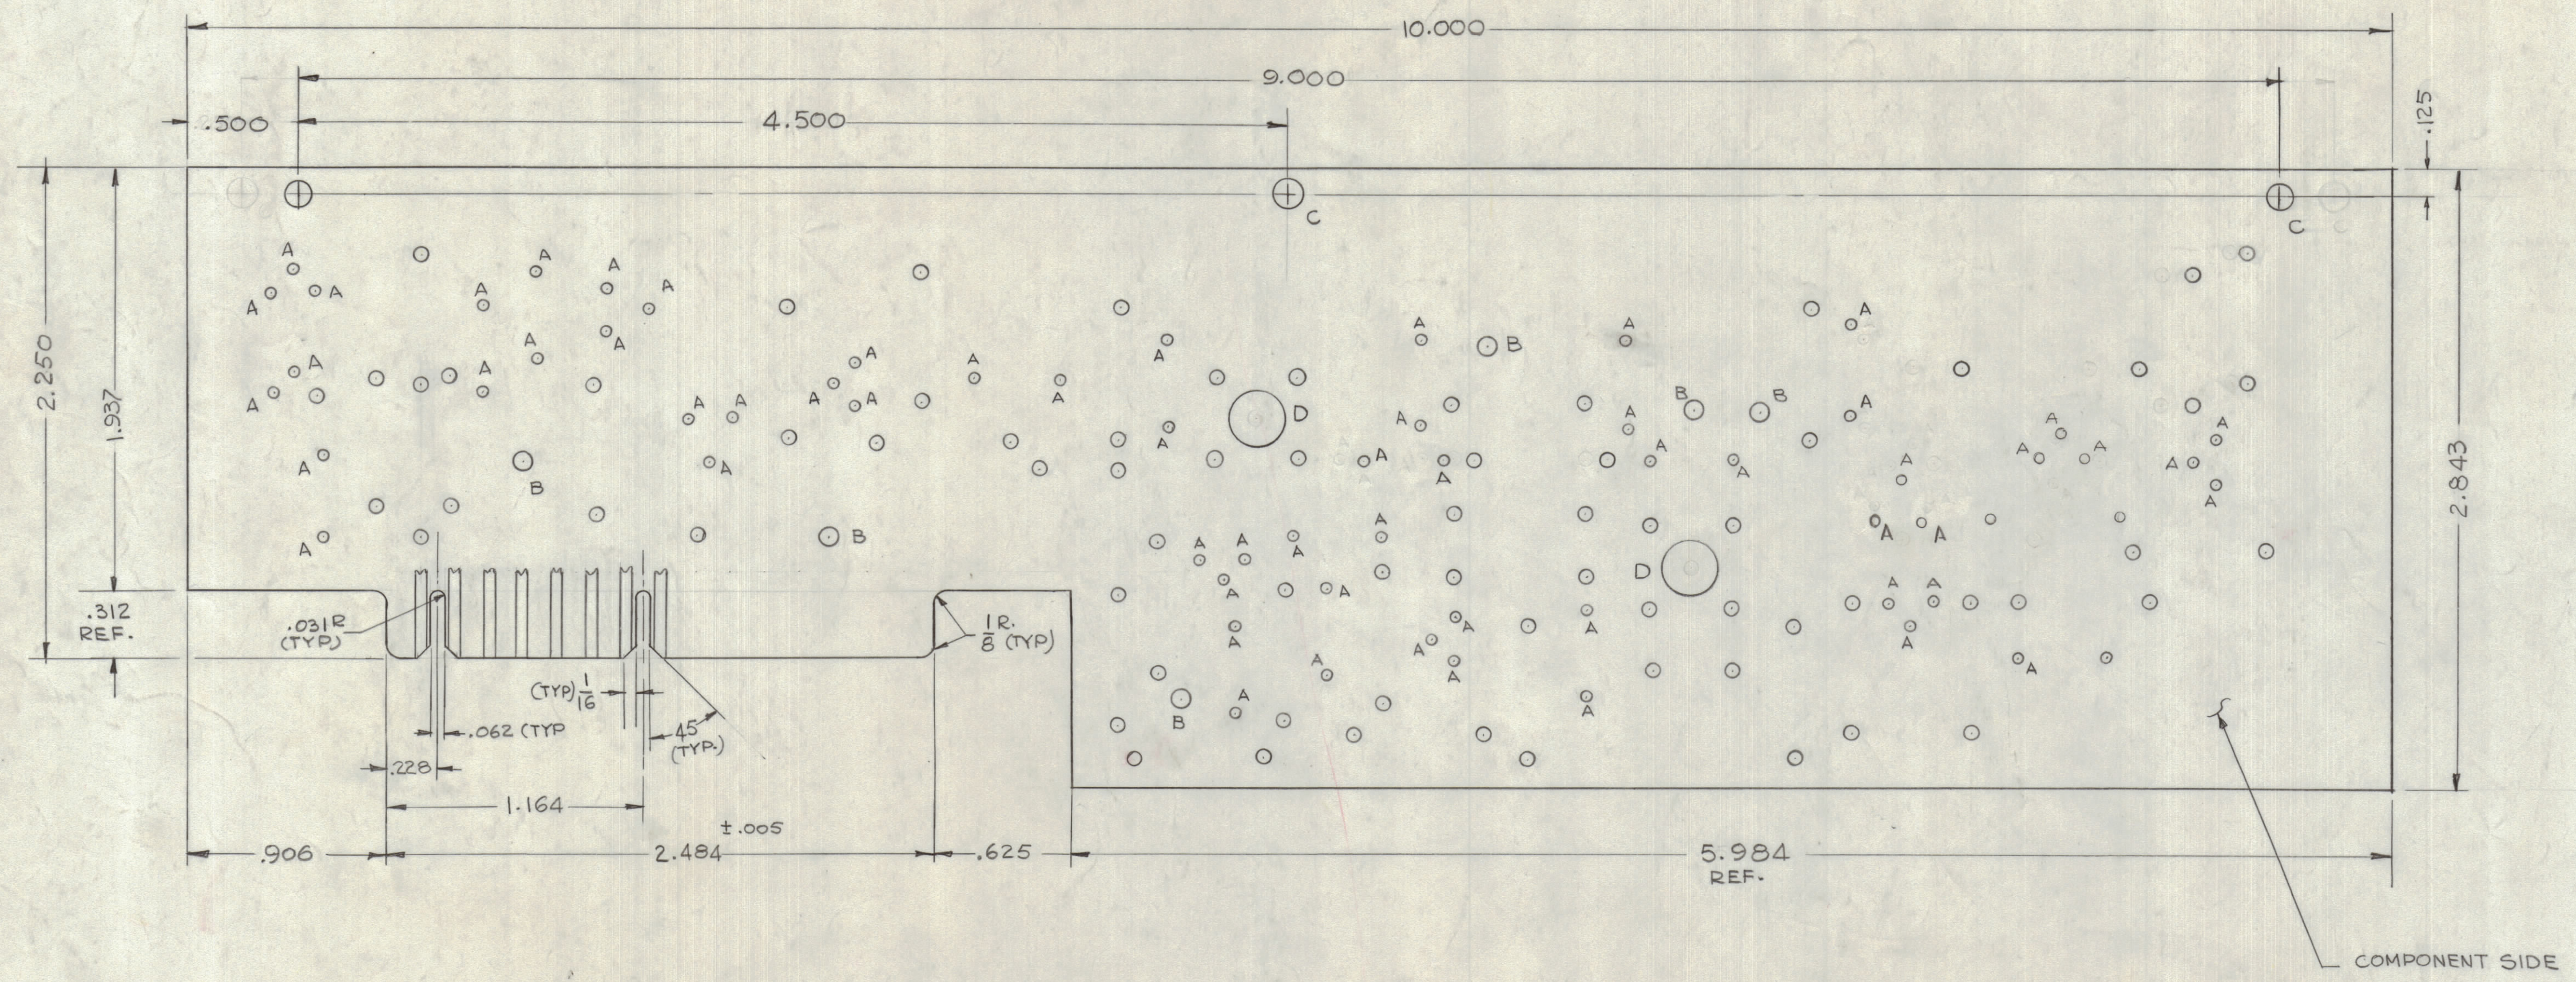

HOLE	DESCRIPTION	REQ
A	.040 DIA.	60
B	.081 DIA	6
C	1/8 DIA	3
	UNMARKED HOLES .052 DIA.	76
D	17/64 DIA	2

- NOTES -
- 1-MANUFACTURED IN ACCORDANCE WITH TMC SPEC. S-735 AND SPECIALLY:
 - 1- OVERALL MATERIAL THICKNESS .062 ±.0062 AS PER (PP3.1, 3.2).
 - 2- CONDUCTIVE PATTERN TO BE COPPER FOIL AS PER (PP4.1). PLATING TO BE TIN-LEAD AS PER (PP13.2.2, 13.2)
 - 3- EDGE BOARD CONNECTOR FINGERS SHALL BE GOLD PLATED AS PER (PP10.1, 10.4)
 - 4- COMPONENT SIDE TO BE MARKED AS PER S-727 (FOR MARKING SEE SHEET 1 OF 2). THIS IS A SINGLE SIDED BOARD.

1 MOUNT IN ALL 'B' HOLES AS SHOWN

COMPONENT SIDE

PC246

QTY/UNIT	MODEL USED ON	ASSY. NO.
1	CDN-3	A4356
SCALE	2:1	

6	1	TE 127-2	TERMINAL STUD	B
REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
LIST OF MATERIAL COMP 100-3 (12A200)				
MATERIAL		SEE NOTES		
FINISH		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
TITLE		PRINTED CIRCUIT BOARD		
DRAWN	G.D.L.	DATE	11-22-65	FINAL APPROVAL
CHECKED	SP	DATE		
ELECT. DES.	MMB	DATE	2-3-66	
MECH. DES.		DATE		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		PC246		
DECIMALS	.X ± .05	FRACTIONS	± 1/64	
	.XX ± .01	ANGLES	± 90° 30'	
	.XXX ± .005	TOLERANCES		
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		SHEET 2 of 2		

NOTES