
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ.	USED ON											
PER UNIT	MODEL	ASS'Y, NO.	DATE									

PL-219

TMC	MFG.	NUMBER	CONNECT WIRE COLOR SHOWN TO PIN NO.										
	CAT. NO.	OF LEADS	Pin I	Pin Z	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9	LENGTH	
PL-219-1	909	NONE	NC	NC	NC	NC	NC	NC	NC	NC	NC.	0"	
PL-219 - 2	9090	8	Black	Yellow	Green	White	Red	Orange	Brown	Grey	NC	5"	
PL-219 - 3													
PL-219 -4													
PL-219-5											<u> </u>		

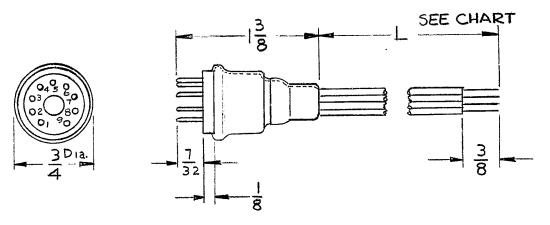

NC = No Connection All Leads will be Std. 22 Ga. Stranded Insulated Wire (Mil Type MWC22(7) U\_\_ Free End will be Stripped & Tinned 3"

													· · · · · · · · · · · · · · · · · · ·	
							REQ.	ITEM		PART NO.		DESCRIPTIO	Й	SYMBOL
									STOCK	( SIZE	THE 7	MATERIEL COR NEW YORK	Р.	
λ_	DRAWING, WAS PL-184	<i>II</i> -2Π-L <sub>1</sub>	5955	BB	OK.	v/M:f	<i>~</i>						NIATURE	
SYM	DESCRIPTION	,	1		40x20x2	ENG. APP.	MATERIAL			ERIAL	CONNECTOR			
·	UNLESS OTHERWISE SPECIFIED:		SCALE: S401-163								<u>L. L.</u>	RUZZŪ	FINAL APPROVA	.1
TOLER	ANCES ON ± 1/64 DEC. ± .005 ANGLES ± 1/2°	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.					TYPE	E & TEN		SPEC. NO.		CHECKED  MECH. DES. APP.	PL-219	A