


PM-105 G

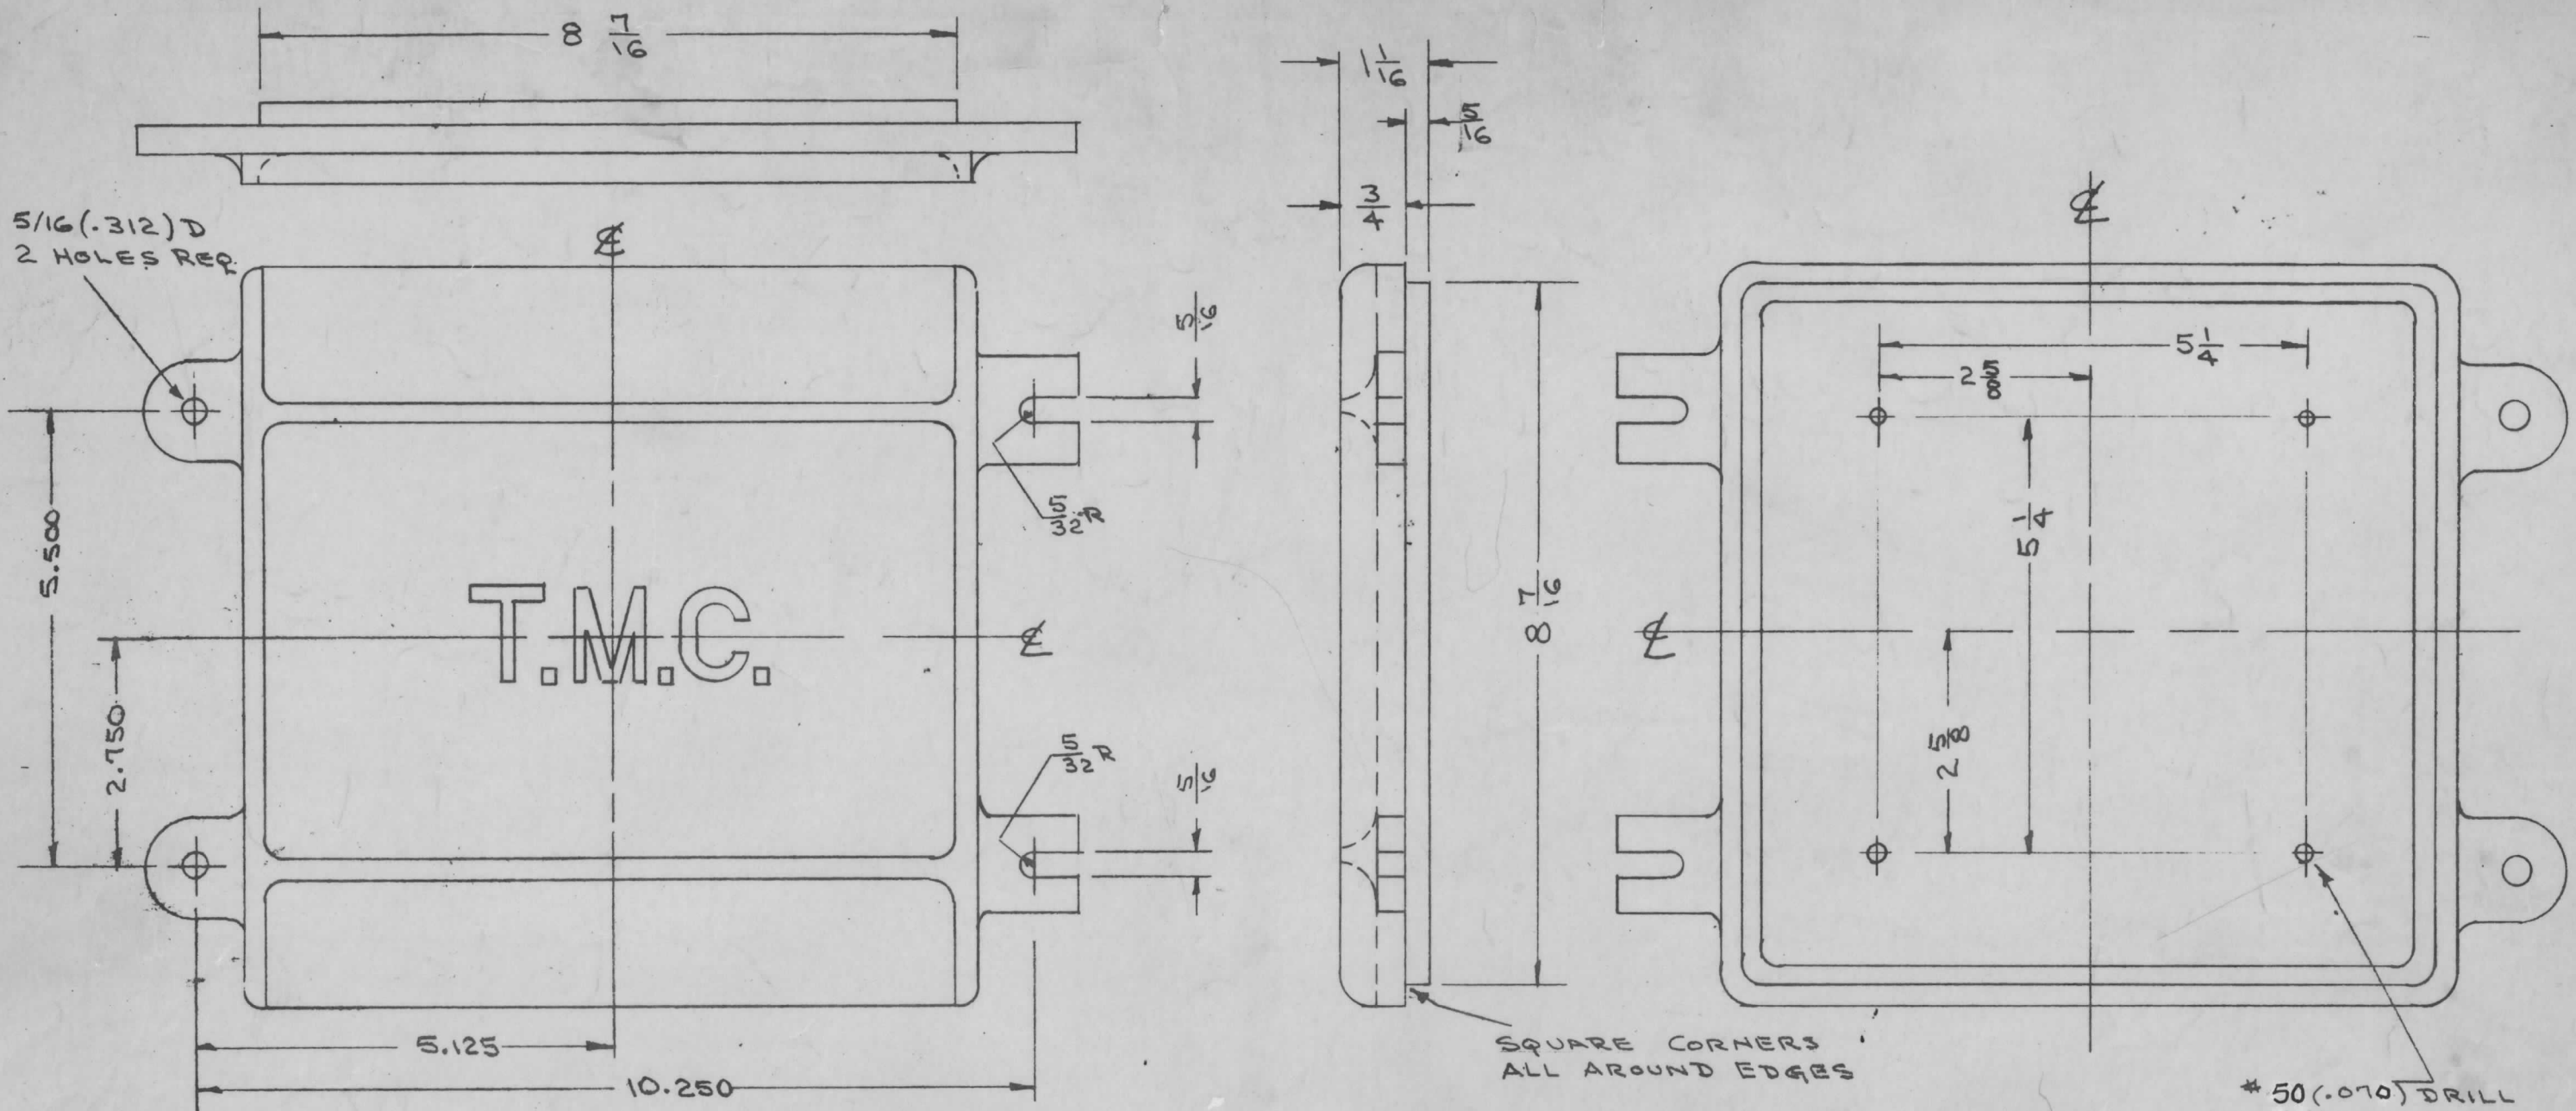

NOTE

- S-404 YELLOW IRIDITE
- S-114 ZINC CHROMATE PRIMER
- S-115 SMOOTH GRAY ENAMEL

REF: CASTING CS-100

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
G		CHG'D #47(.078) 3/16 DP. TO #50(.070) 1/4 DP.	10/6/66	16986	RME	ARB	EMN
F	1	RTB-14 ADDED TO USED ON COLUMN.	11/15/63	10367	ARB	ARB	EMN
E	1	S-404 WAS S-101	12/15/59	1001	ARB	ARB	EMN
		REDRAWN NO CHANGE	6/6/56	1	JAR	ARB	ARB

1	RTB-14		A-3306	11-W-63
1	VRA			5-26-56
1	RAC-3		A-1463	10-13-57
1	RAC-7A		A-1354	10-30-56
1	RAC-11	542		6-6-56
1	RAC-7			3-14-56
1	TRC-500	437		2-17-56
1	RTB-1		A-168	9-7-53
1	RTB		A-168	10-3-52
1	BAC-1-S-15	230	A-525	9-15-53
1	BAC-1	157	A-189	10-17-52
1	BAC-4-S500	153	A-233	9-6-52
1	BAC-3-S500	153	A-234	9-6-52
1	BAC-4-S20	108	A-109	7-9-52
1	BAC-3-S20	108	A-108	7-9-52
1	BAC-1-S20	108	A-106	7-9-52
1	RAC	112	A-101	5-9-52

REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
STOCK SIZE		COVER, MACHINING	
MATERIAL		ALUMINUM	
356-TG	STRESS RELIEVED	JAR	ARB
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
FINISH & SPEC. NO.		SEE NOTE	FINAL APPROVAL
		WJ	PM-105 G

TOLERANCES: DEC. DIM. ±, FRAC. DIM. ±, ANGULAR DIM. ±

SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

USED ON