
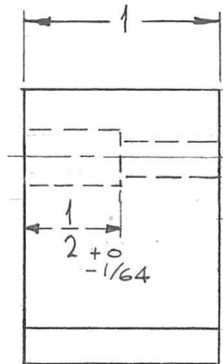


REQ. PER UNIT	USED ON			PM 1012 Ø
	MODEL	ASS'Y. NO.	DATE	
1	GPT-200K	A-2706	3-20-64	

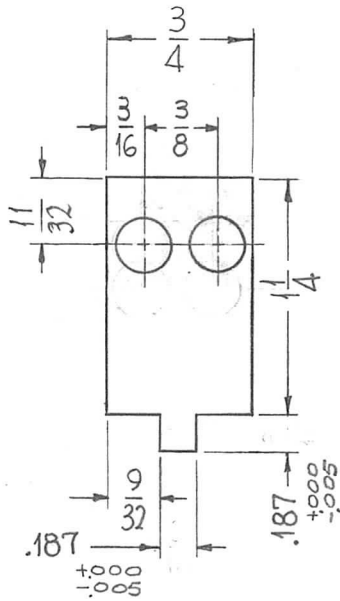

HOLES:
 DRILL 3/16 DIA. THRU $\frac{1}{4}$
 C'BORE 5/16 DIA.

REQ.	ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
		AS NOTED	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
		STAINLESS STEEL	KEY, RESTRAINER			
0	ORIG. RELEASE FOR PROD.	5-27-64	SRG			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1" = 1"			
DECIMALS	TOLERANCES	FRACTIONS	CODE	TYPE & TEMPER		
.X ± .05		± 1/64	A	CLEAR PASSIVATE	DRAWN	CHECKED
.XX ± .01		ANGLES				FINAL APPROVAL
.XXX ± .005		± 0° 30'				PM 1012 Ø
				FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.