


REQ. PER UNIT	USED ON			PM1088	Ø
	MODEL	ASS'Y. NO.	DATE		
1	VLRB-1		7-9-64		

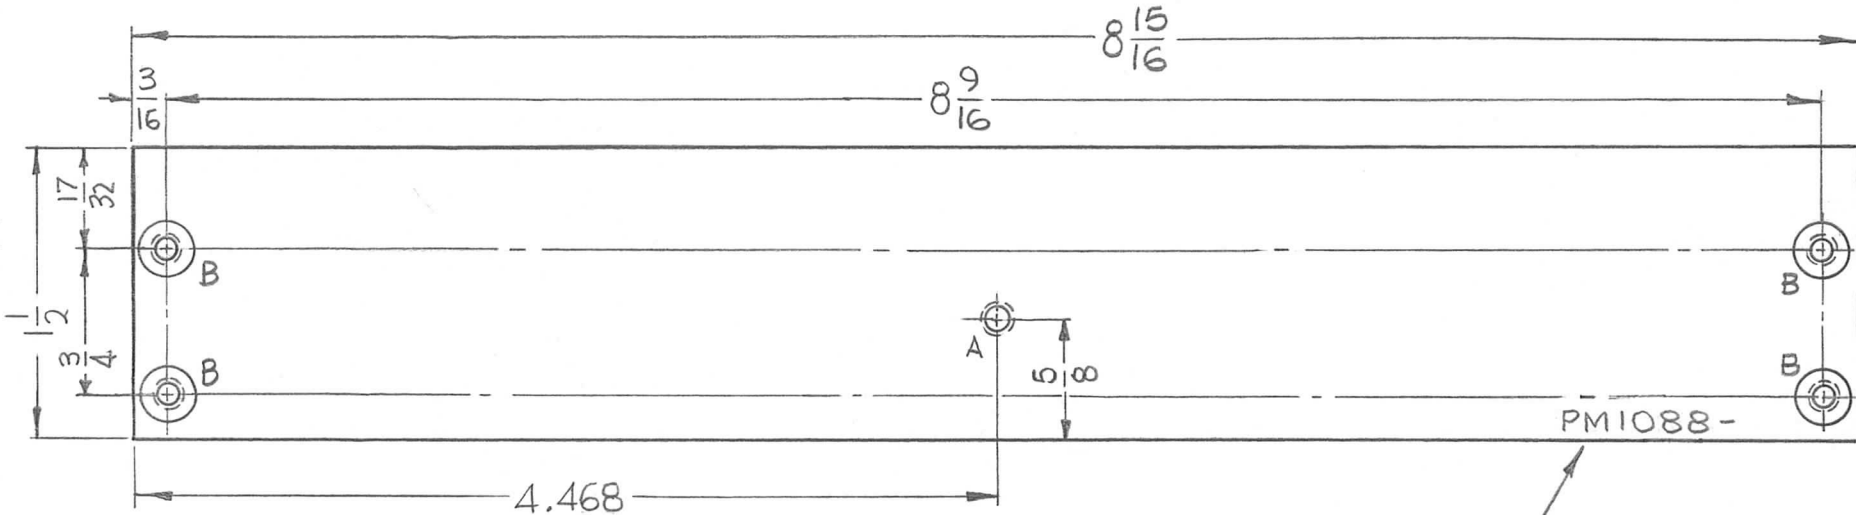

HOLES:

- A ~ DRILL & TAP 8-32 THRU (1REQ)
- B ~ C'SINK 82° X .265 DIA. THEN DRILL & TAP 6-32 THRU (4REQ.)

METAL STAMP TMC PART NO 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

REMOVE ALL BURRS AND SHARP EDGES

						REQ. ITEM	PART NO.	GELLMAN	DESCRIPTION SK 3136-PM-25	SYMBOL	
0	ORIGINAL RELEASE FOR PRODUCTION	8.4.64	+	WB		1/4 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
X ₁	TYPE & TEMP. WAS 5052-H32	8.4.64	+	WB		STOCK SIZE		BRACE, "U" CHANNEL			
X	EXPERIMENTAL RELEASE	7-9-64		SRG		ALUMINUM					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				2024-T4		SRG	@	RCL	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A	S404 YELLOW IRIDITE		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
TOLERANCES					FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	PM1088	Ø	