


REQ. PER UNIT	USED ON			PM1094	Ø
	MODEL	ASS'Y. NO.	DATE		
1	VLRB-1		8/28/64		

HOLES :
 A-DRILL .120 DIA. THRU & C'SINK
 82° X .230 DIA.

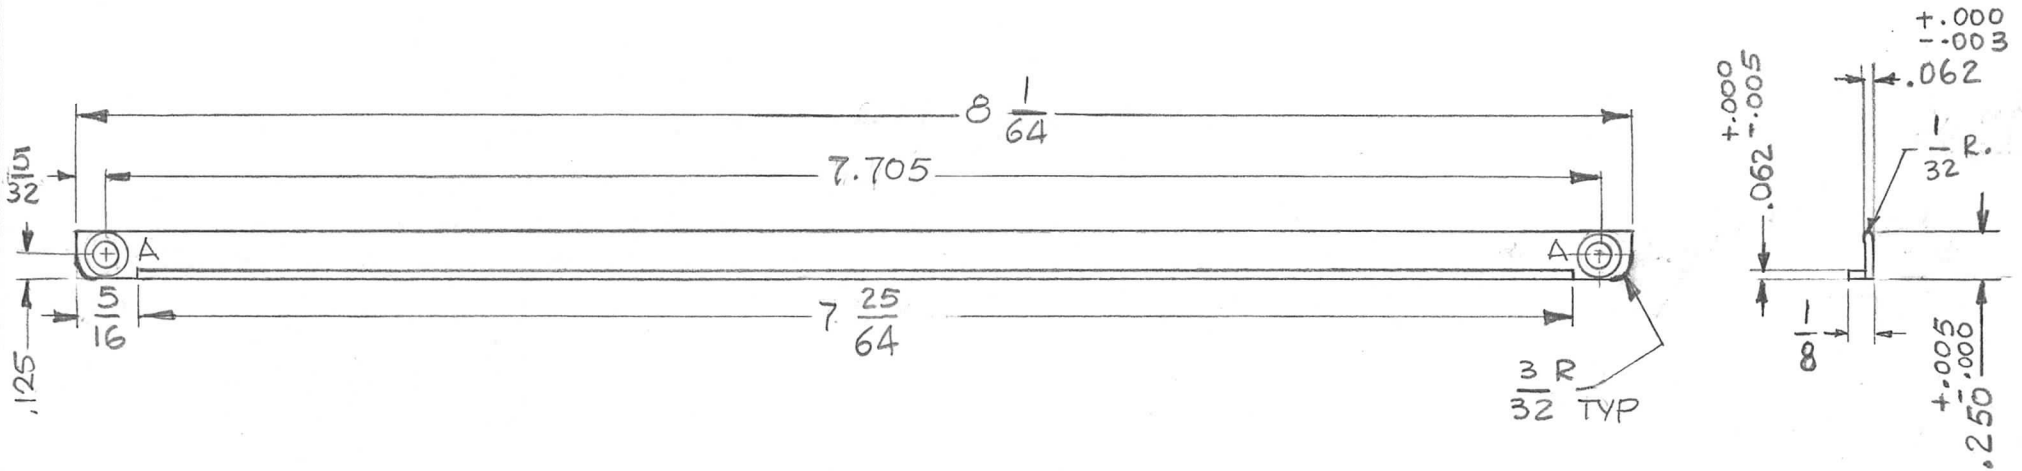

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	T. KRUY	DESCRIPTION	POSE	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	9/17/65	Ø	X.V.V.			AS NOTED			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
X1	REDIMENSIONED	12-2-64		G.D.L.			STOCK SIZE			SLIDE, DIAL			
X	EXPERIMENTAL REL.	8/28/64		WB			MATERIAL						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE						
							1:1						
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
							S104 - PASSIVATE		WB	J.C.B.	[Signature]		
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	PM1094			
DECIMALS		FRACTIONS		CODE									
.X ± .05		± 1/64											
.XX ± .01		ANGLES											
.XXX ± .005		± 0° 30'											