


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CM. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	4 MAY 71		PJ		
A		REV PER CEMN	14 JULY 71	1044	UAT.		
B		REV PER CEMIN	5 OCT 71	1066	JD		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

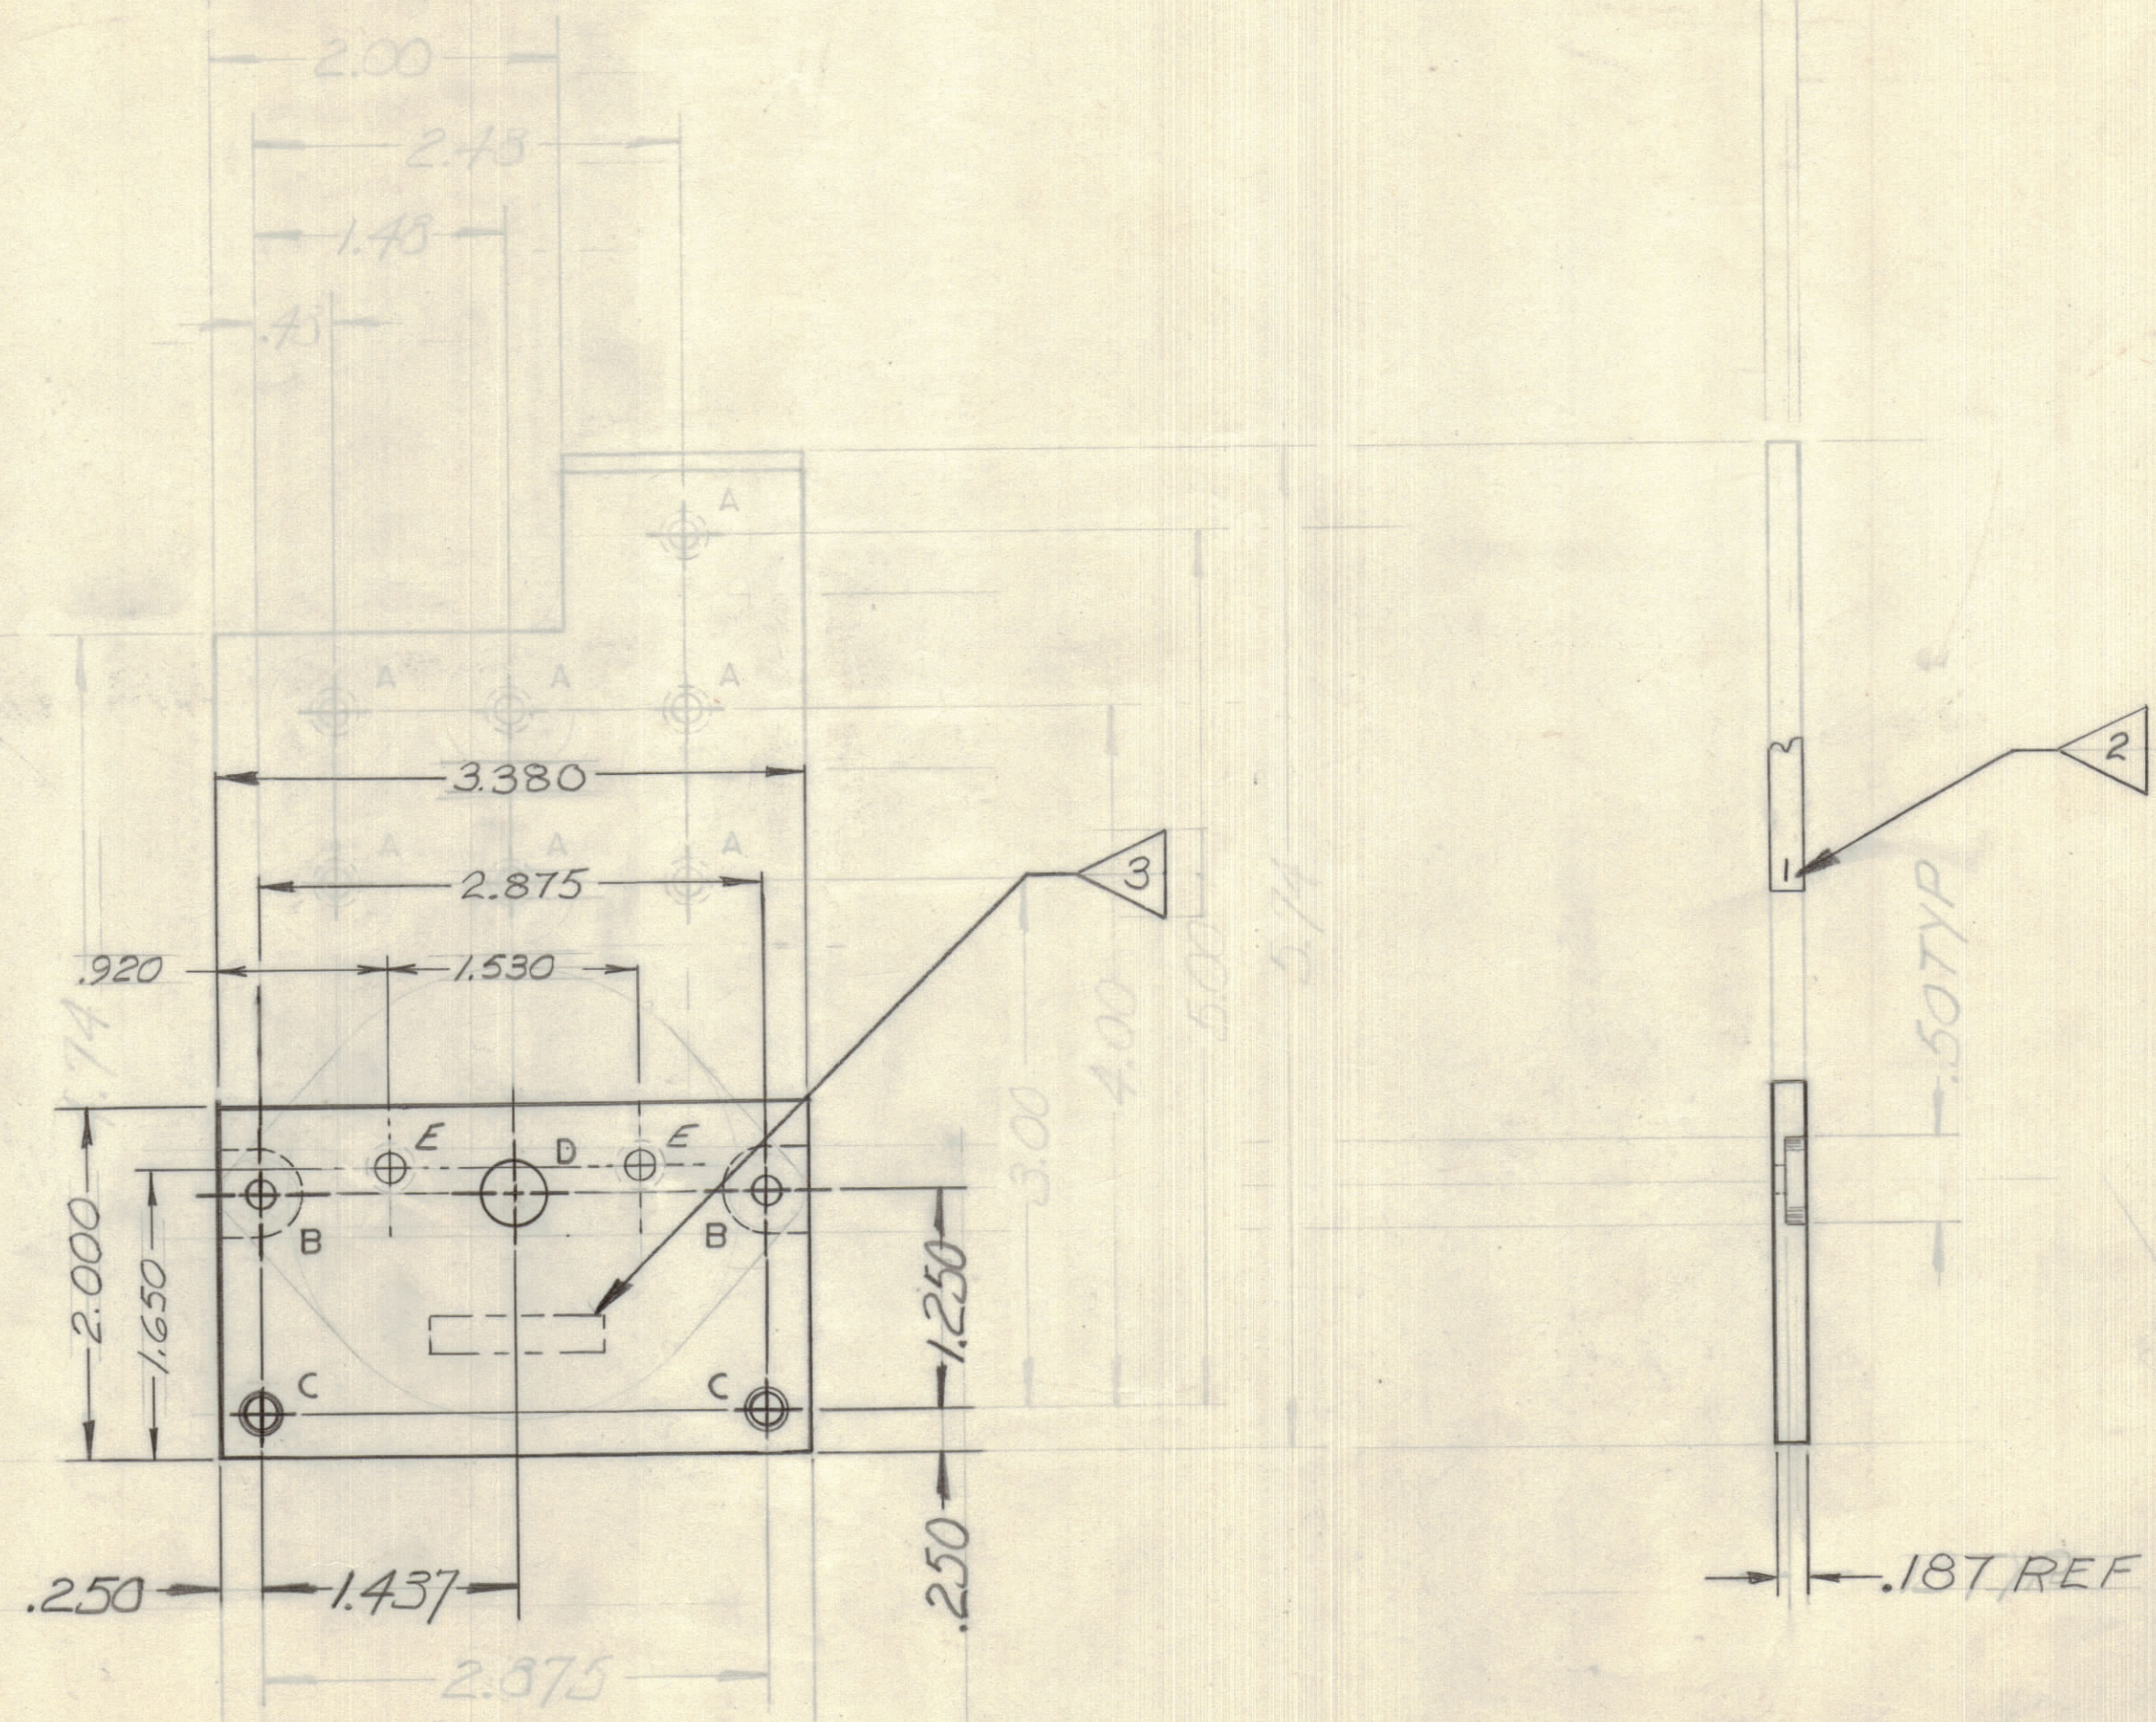

PM10172 B

HOLE DATA TABLE		
HOLE	DESCRIPTION	QTY
A	.171 DIA & .05 CHAM .290 DIA X .02	7
B	.173 DIA	2
C	.187/.189 DIA & CHAM .015 X 45° (1 SIDE ONLY)	2
D	.375/.376 DIA	1
E	.17140 DIA .02 X .290 DIA	2

3. STAMP TMC, PART NO. 1/8 HIGH 60TH IN APPROXIMATE POSITION SHOWN ON OPPOSITE SIDE.
2. PART TO BE MARKED
1. PM10123 & PM10172 TO BE FURNISHED IN MATCHED PAIRS (DRILL IN CONJUNCTION B, C & D HOLES ONLY.)

NOTE

.187 THK		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
AL ALY		PLATE	
MATERIAL	WEIGHT PER PC.	SWITCH MOUNTING	
575 H32		WILLIAMS	
TYPE & TEMPER		DRAWN	ELEC. DES. APP. MECH. DES. APP.
		ROTOR	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
IRIDITE S404			PM10172 B
FINISH & SPEC. NO.			

TOLERANCES		SCALE: 1/1
ALL OTHERS	DEC. DIM. ± 1/64 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	.X+.08 .XX+.01 .XXX+.005
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.		

LPA	088/71	4 MAY 71
MODEL	PROJECT NO.	DATE
USED ON		