
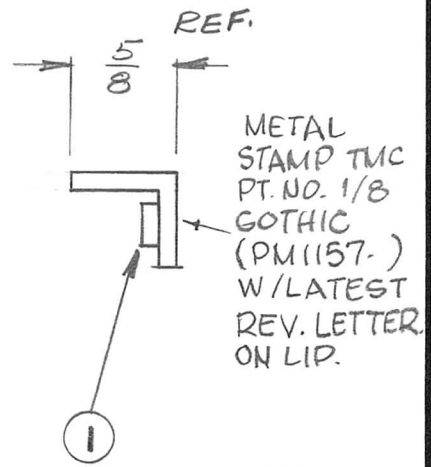


REQ. PER UNIT	USED ON			PM1157	Ø
	MODEL	ASS'Y. NO.	DATE		
2	RTIA-1	A4063	1-25-65		

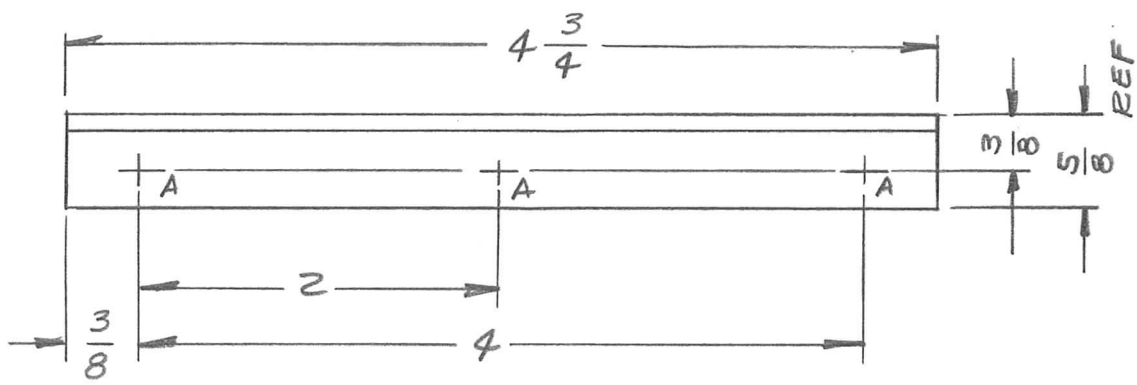

HOLE DESCRIPTION REQ.
 A .221-.224 DIA. 3

MOUNT IN ALL "A" HOLES AS SHOWN AFTER FINISHING

							3	1	NT129-832-6	NUT, PLAIN, SPLINE	A	
							REQ. ITEM	PART NO.		EATON	DESCRIPTION	SYMBOL
									5/8 x 5/8 x 1/8 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
									EXTRUDED ANGLE ALUMINIUM	BRACKET, SUPPORT, XFMR (±12V POWER SUPPLY)		
									MATERIAL			
							ALCOA DIE# 79-0		AA	 		
							TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							5404 YELLOW IRIDITE			 2/8/65	 2/8/65	PM1157
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		Ø
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES			
ORIGINAL RELEASE FOR PRODUCTION							2.8.65	Ø	J.F.			
X2 REDRAWN - NO CHANGES							1.25.65	X2	J.M.			
SYM DESCRIPTION							DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	