REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	PM1196	B
1	RFTA-1		12-22-64		

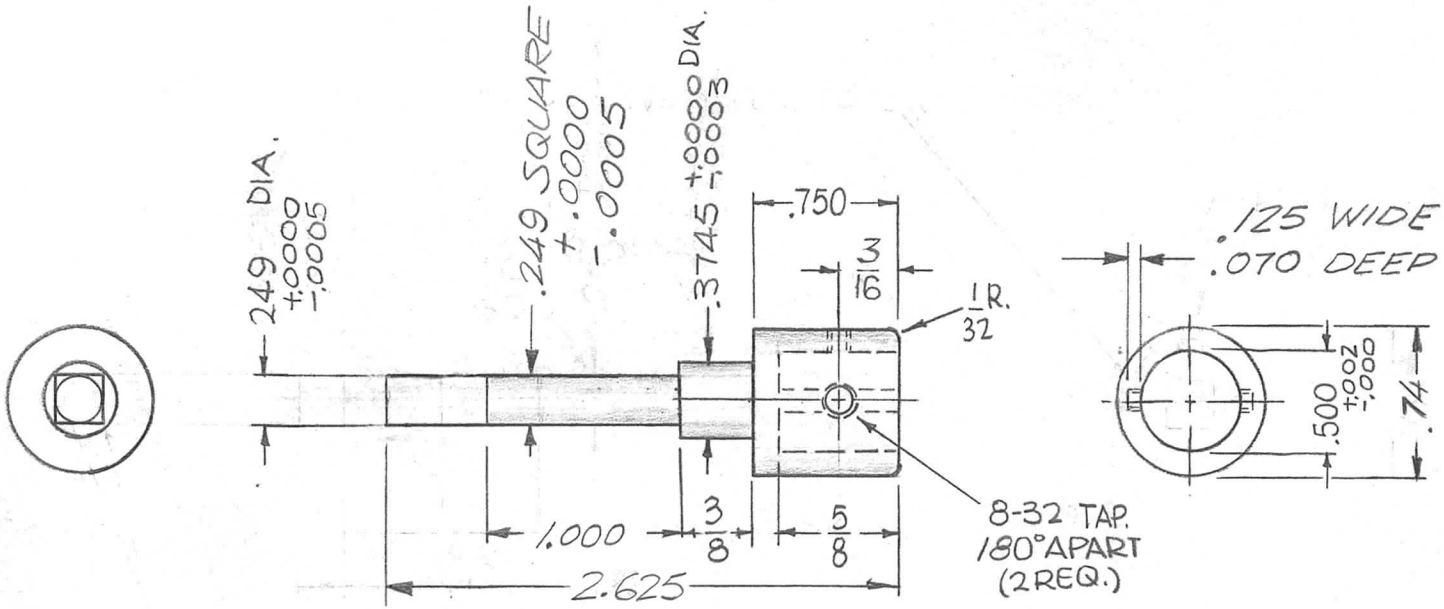

NOTE:

1- ROUND ALL EDGES 1/64 R.
2- DIM'S APPLY AFTER SILVER PLATING.
3- SHAFT TO TRACK WITHIN .003" OF TRUE.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	REV. & UPDATED	6/3/70	19874	KH		FB
A	REVISED & UPDATED	7/1/69	19502	GE		FB
Ø	ORIGINAL RELEASE FOR PRODUCTION	6.23.66	H	WHW		
X3	COMPLETELY REVISED	7-27-65	X3			
X2	.375 WAS 3/8, .250 ROUND WAS SQ.	6-21-65	X2			
X1	DIM. 2.625 WAS 2.375	3.10.65	X1			
X	EXP. RELEASE	12-22-64	X	SRG		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

DECIMALS .X ±.05 .XX ± .01 .XXX ±.005 — TOLERANCES — FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

AS NOTED — STOCK SIZE

BRASS — MATERIAL

HALF HARD — TYPE & TEMPER

HEAT TREAT. SPEC.

S245 SILVER PLATE
S423 IRIDITE 18P SILVER KOTE — FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

HUB, BANDSWITCH

DRAWN	CHECKED	FINAL APPROVAL
SRG		

ELEC. DES. APP.	MECH. DES. APP.
6/22/66	

PM1196 B