



HOLES	DESCRIPTION	REQ.
A	.1240-.1245 DIA.	2
B	DRILL & TAP FOR 8-32	3
C	7/32 DIA.	2

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	RFTA-1		1-13-65

PM1202 \emptyset

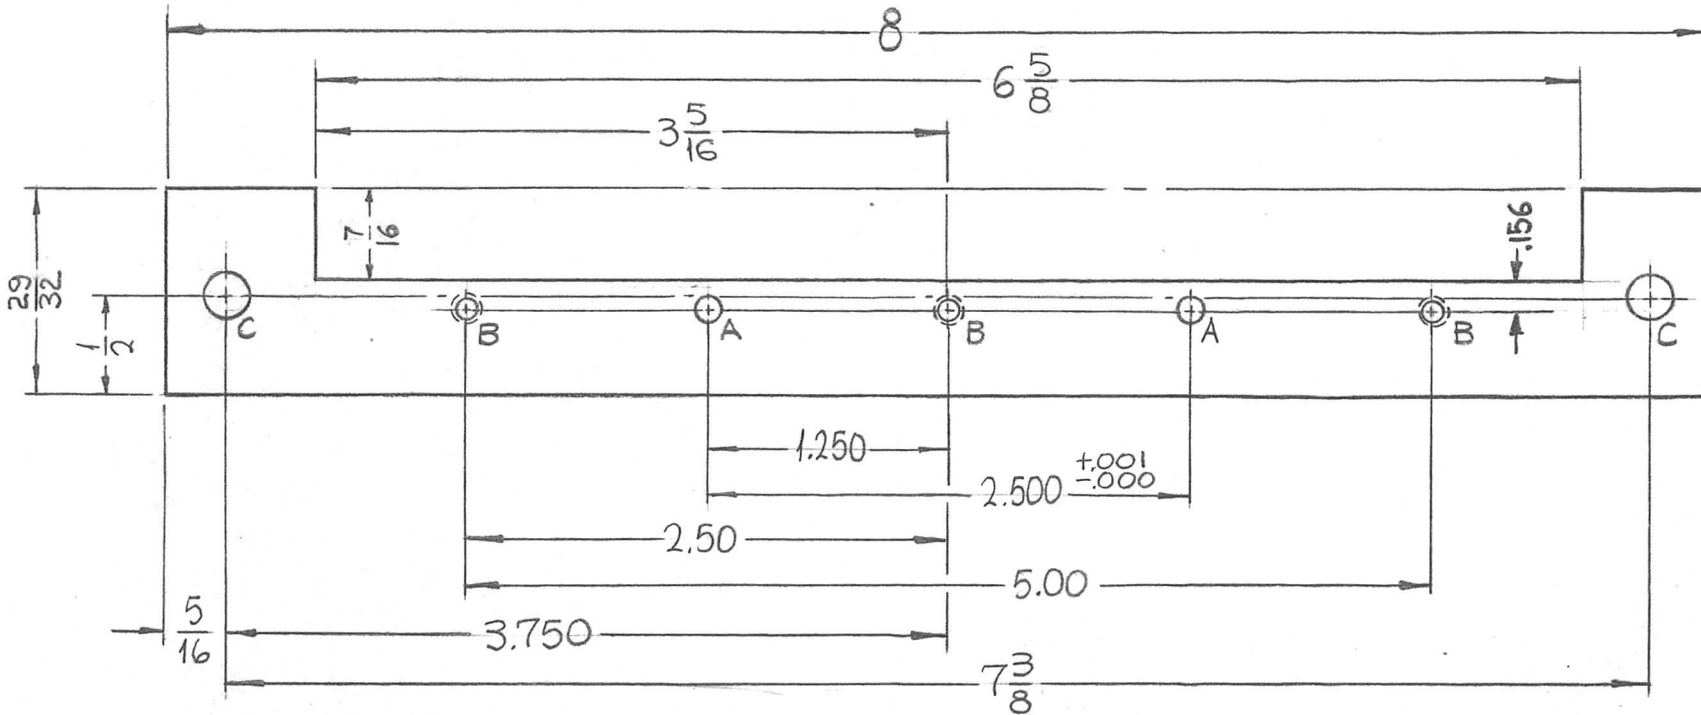

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	4/26/67	\emptyset	CV	<i>file</i>	
X4	ITEM 1 & TYPE & TEMP. ADDED	5-17-65	X4	SRG	<i>SR</i>	
X3	OBSOLETE NOTE DELETED	5-5-65	X3	SRG		
X2	DIM 3 5/16 WAS 3 3/2 - 6 5/8 WAS 6 9/16	2-19-65	X2	SRG		
X1	"C" WAS 15/64 DIA DIMS. UPDATED	2-16-65	X1	<i>SR</i>		
X	EXP. RELEASE	1-13-65	X	SRG		

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
2	1	PN116-A-3S	PIN, DOWEL	A
		1/4 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE	RETAINER, GEAR ASS'Y	
		ALUMINUM		
		MATERIAL		
2024-T4		SRG	<i>SRG</i>	
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
S245 SILVER PLATE		<i>aa</i>	<i>SR</i>	FINAL APPROVAL
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	PM1202 \emptyset

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

FRACTIONS
± 1/64
ANGLES
± 0° 30'

TOLERANCES
A