


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TST (1)0K	A4315	1-29-65

PM1276 \emptyset

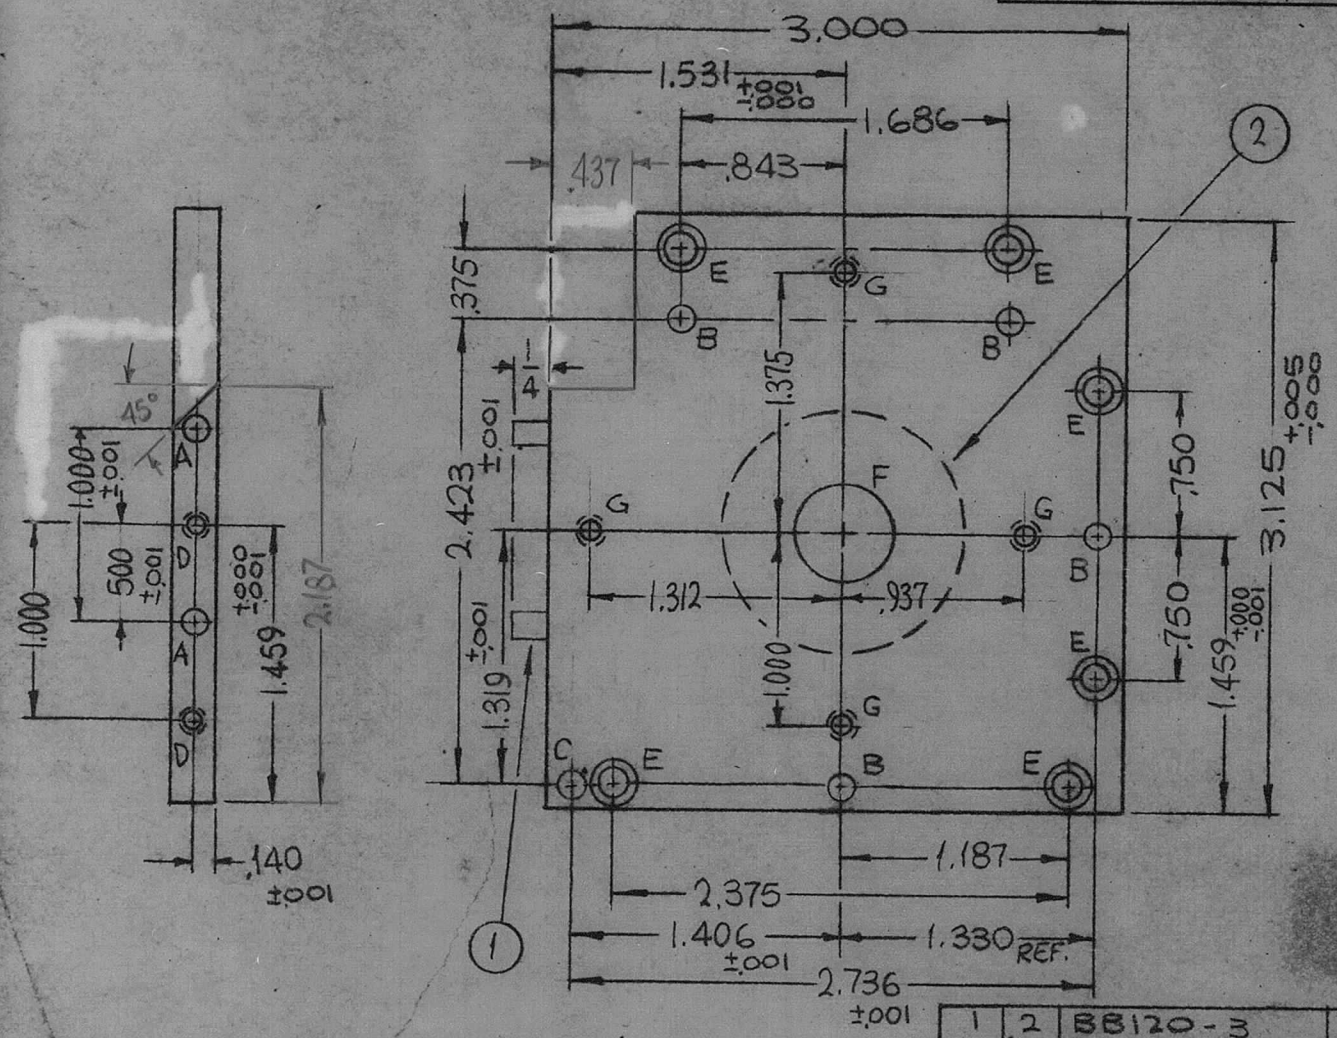

HOLES	DESCRIPTION	REQ
A	.1247-.1250 DIA X 3/16 DP.	2
B	.126 \pm .001 DIA.	4
C	.130 \pm .005 DIA.	1
D	DRILL & TAP FOR 4-40 X 3/8 DP.	2
E	DR. 9/64 DIA. C'BORE .218 DIA X 5/32 DP.	6
F	DRILL 13/16 DIA. C'BORE 1.1240-1.1245 DIA. X .125 DP.	1
G	DRILL & TAP FOR 10-32	4

1	2	BB120-3	BEARING, BALL	F	
2	1	PN116-A-3S	PIN, DOWEL	A	
REQ. ITEM	PART NO.		F. BUDETTI	DESCRIPTION	SYMBOL
1/4 THICK			THE TECHNICAL MATERIEL CORP.		
STOCK SIZE			MAMARONECK, NEW YORK		
ALUMINUM			PLATE, TOP, GEAR BOX		
MATERIAL					
2024-T4		SRG	SRG		
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
S404 YEL. IRIDITE				PM1276 \emptyset	
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		

ORIGINAL RELEASE FOR PRODUCTION					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1		
DECIMALS	TOLERANCES	FRACTIONS	CODE	A	
X \pm .05		\pm 1/64			
XX \pm .01		ANGLES			
XXX \pm .005		\pm 0° 30'			