

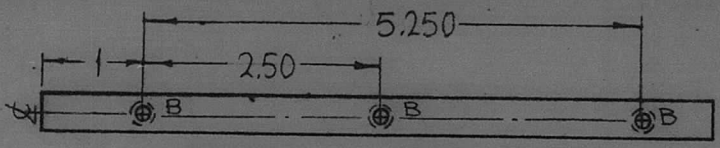


REQ. PER UNIT	USED ON			PM1278 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	TST-10K		8-2-65	

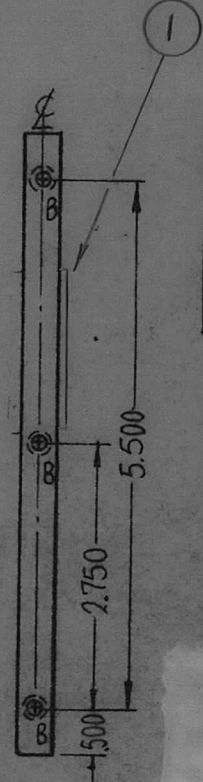

OPPOSITE SIDE SAME

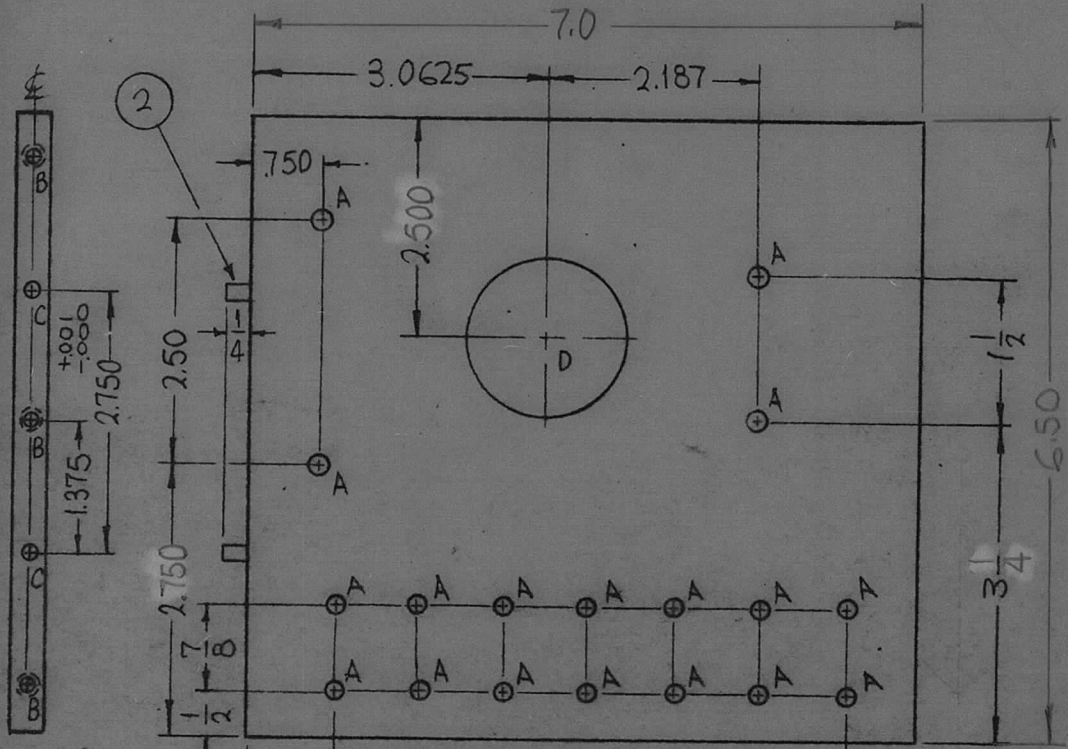

OPPOSITE SIDE SAME (FOR "B" LOCATIONS)

HOLES	DESCRIPTION	REQ.
A	11/64 DIA.	18
B	DR. & TAP FOR 6-32 X 1/4 DP.	12
C	.124 ± .001 X 1/4 DP	2
D	PRESS FIT ITEM 1	1

2	2	PN116-A-4-S	PIN, DOWEL	C
1	1	BB120-4	BEARING, BALL ANNL	D
REQ. ITEM	PART NO.		F. BUDETTI DESCRIPTION	SYMBOL
1/4 THICK			THE TECHNICAL MATERIEL CORP.	
STOCK SIZE			MAMARONECK, NEW YORK	
ALUMINUM			PLATE, MTG. CAPACITORS	
MATERIAL				
5052-T4		HEAT TREAT. SPEC.	DRAWN	CHECKED
S404 YEL. IRIDITE		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			PM1278 \emptyset	

<p>\emptyset ORIGINAL RELEASE FOR PRODUCTION</p> <p>33-66 -14- Jc JCB arc</p>						
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1/2:1			
DECIMALS	TOLERANCES	FRACTIONS	CODE			
.X ± .05		± 1/64	A			
.XX ± .01		ANGLES				
.XXX ± .005		± 0° 30'				