



REQ. PER UNIT	USED ON			PM1279 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	TST-10K		8-2-65	

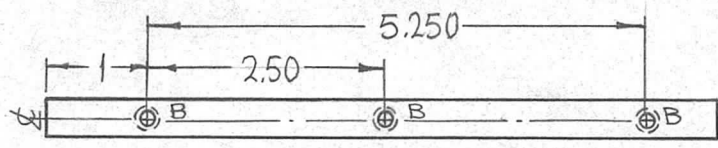

OPPOSITE SIDE SAME

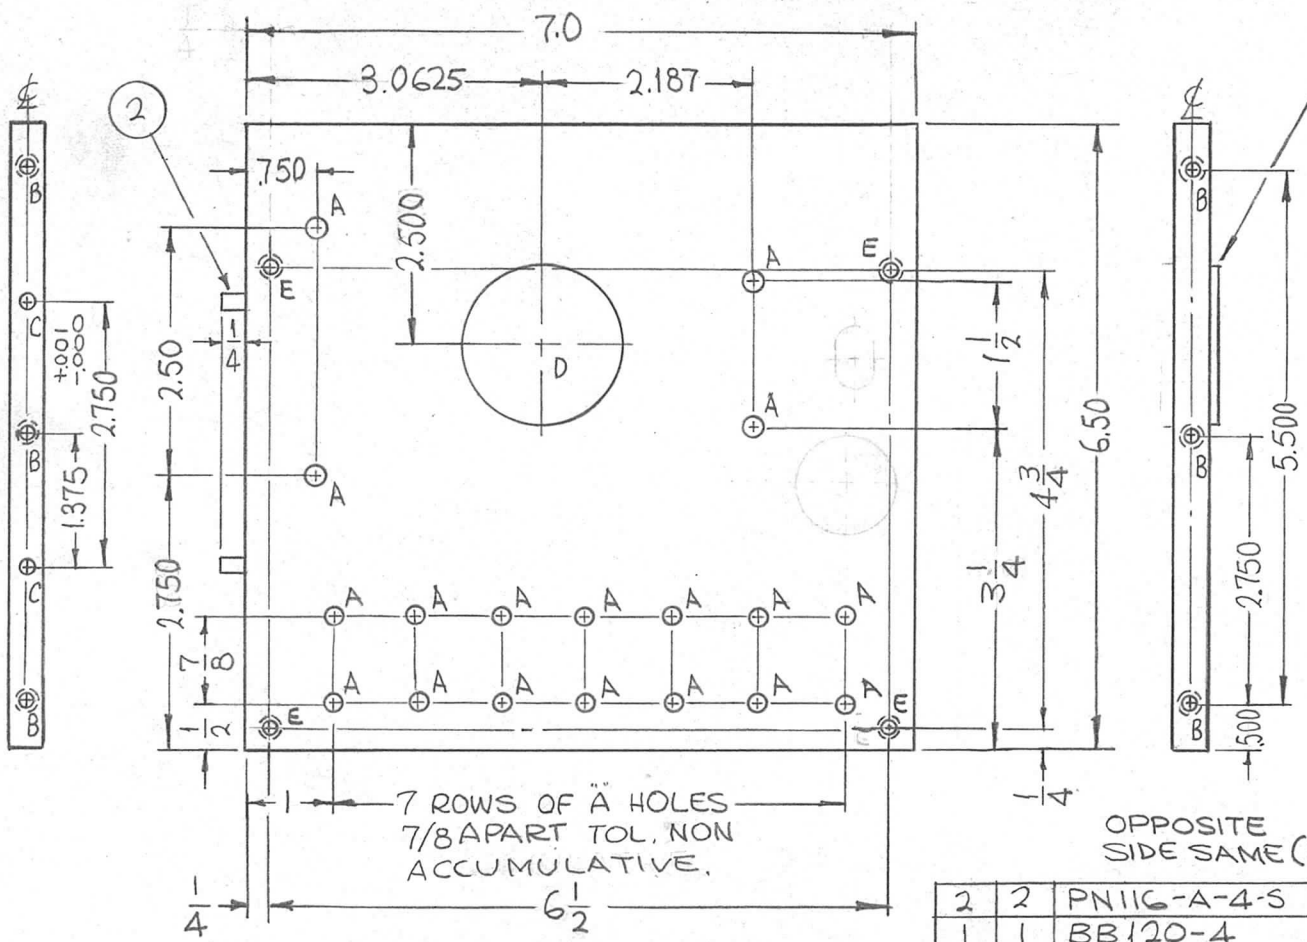

7 ROWS OF "A" HOLES
7/8" APART TOL. NON
ACCUMULATIVE.

OPPOSITE
SIDE SAME (FOR "B" LOCATIONS)

HOLES	DESCRIPTION	REQ.
A	11/64 DIA.	18
B	DR. & TAP FOR 6-32 X 1/4 DP.	12
C	.124 ±.001 DIA. X 1/4 DP.	2
D	PRESS FIT ITEM 1	1
E	DR. & TAP FOR 10-32	4

2	2	PN11G-A-4-S	PIN, DOWEL	C
1	1	BB120-4	BEARING, BALL ANNL	D
REQ. ITEM	PART NO.		F. BUDETTI DESCRIPTION	SYMBOL
1/4 THICK			THE TECHNICAL MATERIEL CORP.	
STOCK SIZE			MAMARONECK, NEW YORK	
ALUMINUM			PLATE, MTG. CAPACITORS	
MATERIAL				
5052-T4			<i>[Signature]</i>	<i>[Signature]</i>
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S404 YEL. IRIDITE		<i>[Signature]</i>	<i>[Signature]</i>	PM1279 \emptyset
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1/2:1			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		