
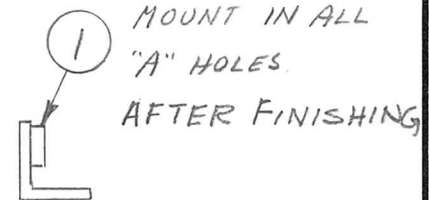


REQ. PER UNIT	USED ON			PM 1297 ϕ
	MODEL	ASS'Y. NO.	DATE	
1	KIT 180			

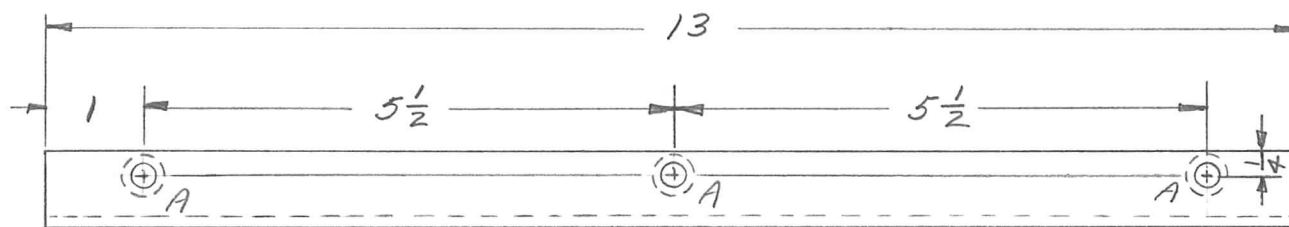

A ~ .221 - .224 DIA. 3 REQ.

STAMP WITH TMC PIN
W/LATEST REVISION LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

							3	1	NT129-832-6	NUT, PLN, SPLINE		
							REQ. ITEM		PART NO.	DESCRIPTION	SYMBOL	
									3/4 x 3/4 x 1/8	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
									STOCK SIZE			
ϕ	ORIGINAL RELEASE	2/2/66							ALUMINUM	BRACKET, MTG.		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE										
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	TOLERANCES	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE									
							TYPE & TEMPER	HEAT TREAT. SPEC.	5404 VEL. IRIDITE			
							FINISH & SPEC. NO.	ELEC. DES. APP.		MECH. DES. APP.		
											PM 1297 ϕ	