



REQ. PER UNIT	USED ON			PM1298 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	KIT 180			

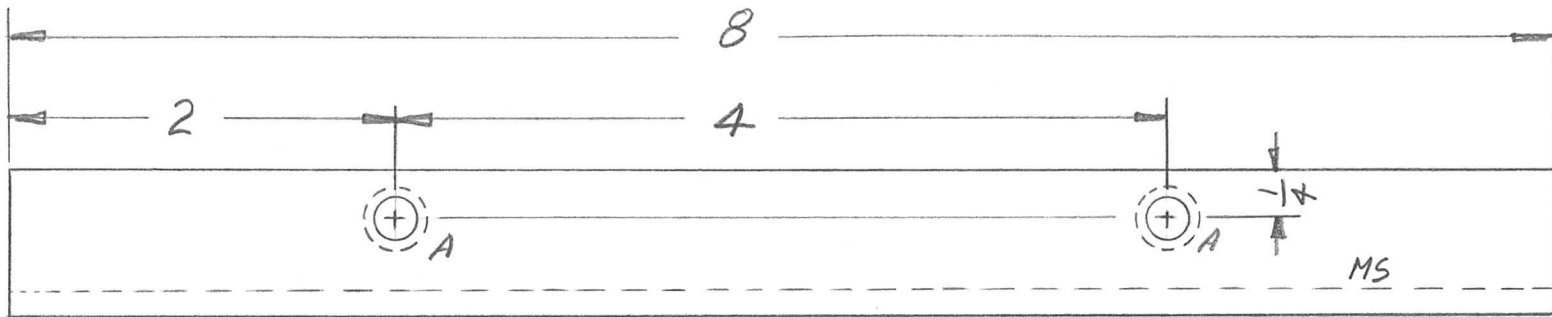

A ~ .221 - .224 DIA 2 REQ.

STAMP WITH TMC P/N
W/LATEST REVISION
LETTER. 1/8 HIGH GOTHIC.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

							2	1	NT129-832-6	NOT PLN SPLINE				
							REQ. ITEM	PART NO.			DESCRIPTION			SYMBOL
							3/4 x 3/4 x 1/8			THE TECHNICAL MATERIEL CORP.				
							STOCK SIZE			MAMARONECK. NEW YORK				
							ALUMINUM			BRACKET, MOUNTING				
							MATERIAL							
\emptyset	ORIGINAL RELEASE	2/2/66												
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE								
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005		FRACTIONS \pm 1/64 ANGLES \pm 0° 30'		TOLERANCES		CODE								
							S404 YEL. IRIDITE			DRAWN				
							FINISH & SPEC. NO.			CHECKED				
										FINAL APPROVAL				
										RJP				
										PM1298 \emptyset				
							ELEC. DES. APP.			MECH. DES. APP.				