



REQ. PER UNIT	USED ON			PM1311	Ø <sub>3</sub>
	MODEL	ASS'Y. NO.	DATE		
1	TLAA-2.5K	AS128	6-9-66		

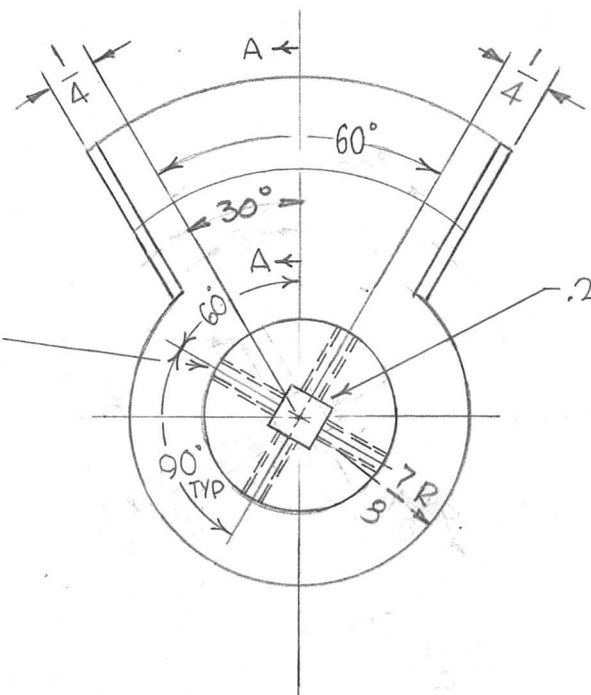

+ .001  
- .000  
.250 SQ. BROACH

NOTE:  
ROUND ALL EDGES 1/64 R.  
ALL DIM. APPLY AFTER  
PLATING

Ø	ORIGINAL RELEASE FOR PRODUCTION	11/17/66	Ø	CV		
X3	BROACH ROTATED 30° SECT. AA ADDED	8/24/66	<del>AA</del>	Jc	QCB	QCB
X2	DIM 7/8 WAS 1/8 R 2 TAP 8-32 ADDED	8.866		G.D.L		
X1	UPDATED.	7-14-66	<del>AA</del>	G.D.L	QCB	
X	EXPERIMENTAL RELEASE	6/16/66	<del>AA</del>	GDL	QCB	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			

REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL
	AS NOTED		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	STOCK SIZE		ROTOR, BAND SWITCH	
	BRASS		"L" SECTION	
	MATERIAL			
	HALF HARD	G.D.L	QCB	QCB
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
	S245 SILVER PLATE		QCB	QCB
	S423 SILVER KOTE			
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
				PM1311