


HOLE	DESCRIPTION	REQ'D
A	.1240 -.1245	2
B	DRILL & TAP FOR 8-32	2
C	7/32 DIA.	2

REQ. PER UNIT	USED ON			PM1313	A
	MODEL	ASS'Y. NO.	DATE		
1	TAA-2.5K	A5493	6-17-66		

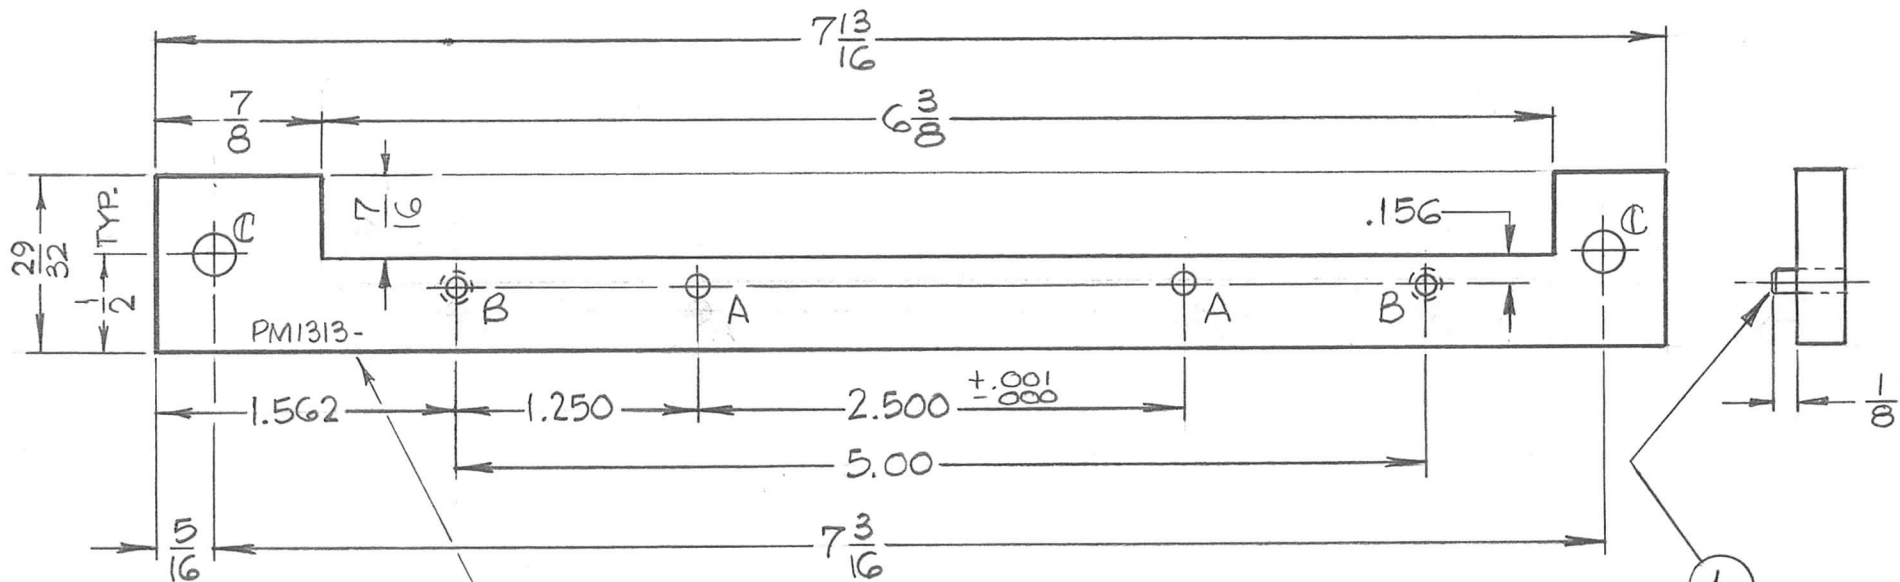

MARK TMC PT. NO. 1/8 HIGH
GOTHIC W/LATEST REV. LETTER

MOUNT IN "A" HOLES
AS SHOWN, AFTER
FINISHING.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
A	FINISH WAS 5245 SILVER PLATE S423 SILVER KOTE	4.24.68	18893	HLA	OCB	FB	2	PNI16-A-3S	PIN, DOWEL	A
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/16/66	Ø	RME			1	BUDETTI	DESCRIPTION	
X	EXPERIMENTAL RELEASE	6-17-66	X	HLA	OCB			1/4 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
								ALUMINUM	RETAINER, GEAR ASS'Y	
								2024-T4	HAUSTIN 6-17-66	OCB
								TYPE & TEMPER	CHECKED	FINAL APPROVAL
								HEAT TREAT. SPEC.	OCB 11-11-66	
								5404 YEL IDIRITE	OCB	PM1313
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

FRACTIONS
± 1/64
ANGLES
± 0° 30'

TOLERANCES