



REQ. PER UNIT	USED ON			PM1330 A
	MODEL	ASS'Y. NO.	DATE	
1	TAA-2.5K	A5498	10-5-66	

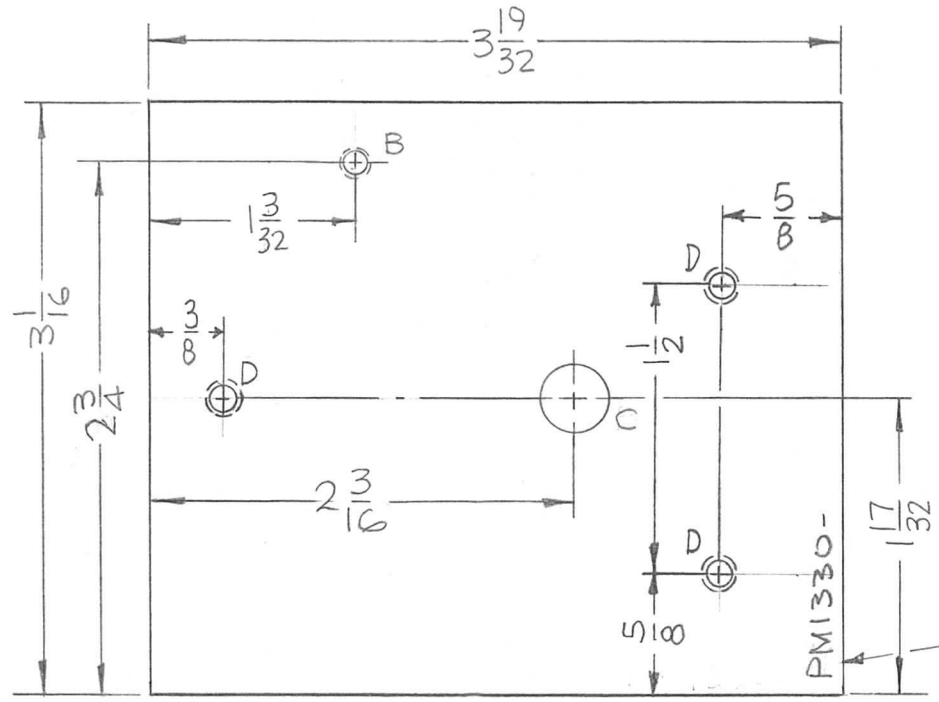

HOLES	DESCRIPTION	REQ.
A	DRILL & TAP FOR 4-40 X 3/8 DP	2
B	DRILL & TAP FOR 8-32 THRU	1
C	3/8 DIA.	1
D	DRILL & TAP FOR 6-32	3

MARK TMC P/N
1/8 HIGH GOTHIC
W/LATEST REV.
LETTER.

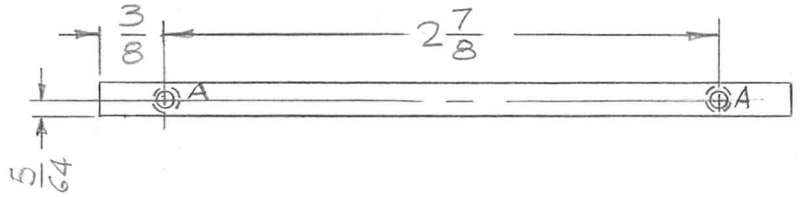

A	FINISH WAS S245 SILVER PLATE S423 SILVER KOTE	4.24.68	18893	NY	FB	FB
Ø	ORIGINAL RELEASE FOR PRODUCTION	12/2/66	Ø	CV		FB
X2	1" D HOLE WAS 1/8, 3D ADDED	11-23-66	X2			FB
X1	"D" HOLE HOLE ADDED	11-8-66	X1			FB
X	EXP. RELEASE	10-5-66	X			FB
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1		2024-T3		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE A
				TYPE & TEMPER S404 YEL IDIRITE		HEAT TREAT. SPEC.
				FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.
				DRAWN CHECKED FINAL APPROVAL		PM1330 A