
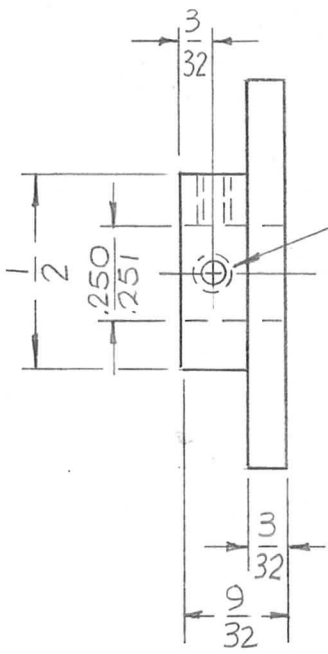


REQ. PER UNIT	USED ON			PM1331	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TLAA-2.5K	BMA 125	10-4-66		

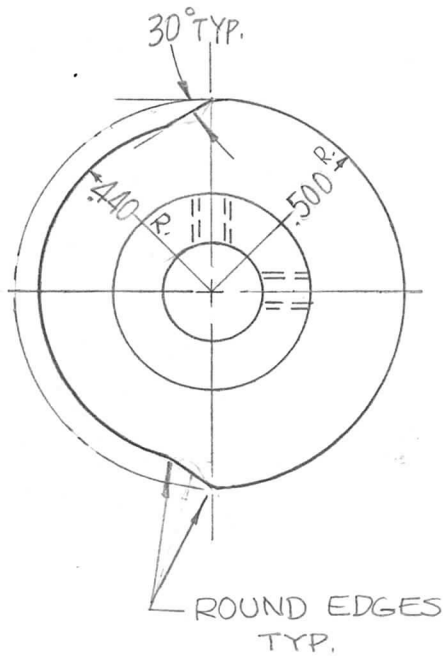

DRILL & TAP FOR 4-40 90° APART

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/6/66	Ø	CV			AS SHOWN		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		
X	EXP. RELEASE	10-4-66	X	MS	169	QR	STOCK SIZE		CAM, SWITCH		
							BRASS				
							MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					H.H.				
		2:1									
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A				TYPE & TEMPER S135 NICKEL PLATE		DRAWN GCB	
TOLERANCES								HEAT TREAT. SPEC.		MECH. DES. APP.	
								FINISH & SPEC. NO.		ELEC. DES. APP.	
										PM1331 Ø	