



REQ. PER UNIT	USED ON			PM-455	C
	MODEL	ASS'Y. NO.	DATE		
1	SBE-1	A-1442	7-19-57		
1	SBE-2	A-1442	5-5-58	A-1442	
1	SBE-3	A-1442	11-30-59	A-1442	

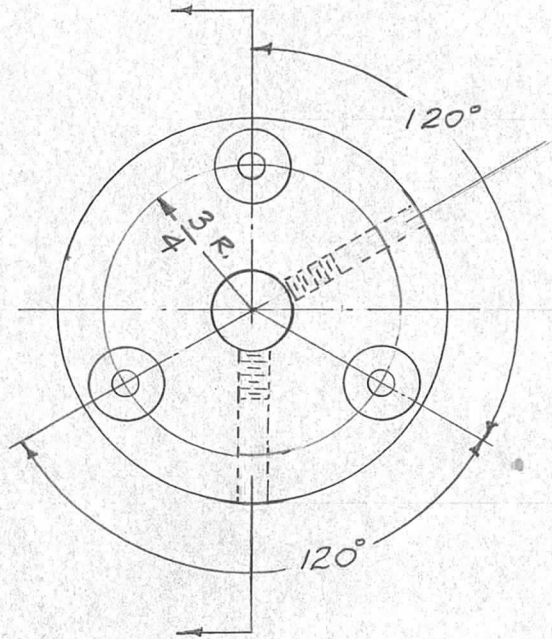

Drill $.128$ D. (No. 30) & c'bore $\frac{3}{8}$ (.375) D. x $\frac{3}{32}$ Deep
3 Req.

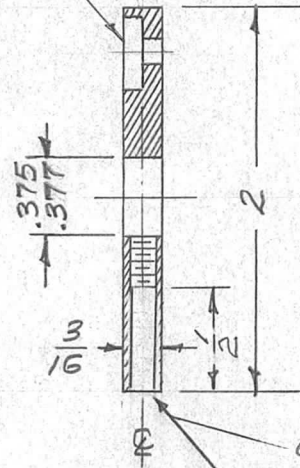

c'bore $\frac{9}{64}$ (.140) D. x $\frac{1}{2}$ Deep,
Drill & Tap 6-32, Class 2 2 Req.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
C	1	FINISH WAS S101 & S107	2-27-61	4488	W.A.F.	JCB	[Signature]	3/16 x 2" D.		THE TECHNICAL MATERIEL CORP.		
B	1	C'BORE Added	2/6/58	2	JCB	[Signature]	[Signature]	STOCK SIZE		MAMARONECK, NEW YORK		
A	1	.375 ID WAS .378 .377	12/19/57	1	[Signature]	[Signature]	[Signature]	ALUMINUM		HUB, MF DIAL		
TOLERANCES								2024-T3		16 7-19-57	[Signature]	[Signature]
SCALE: Full								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DEC. DIM. \pm								S404 YELL. IRIDITE		[Signature]	RWB	PM-455
FRAC. DIM. \pm 1/64								FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	C
ANGULAR DIM. \pm								REMOVE ALL BURRS AND SHARP EDGES				