





IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

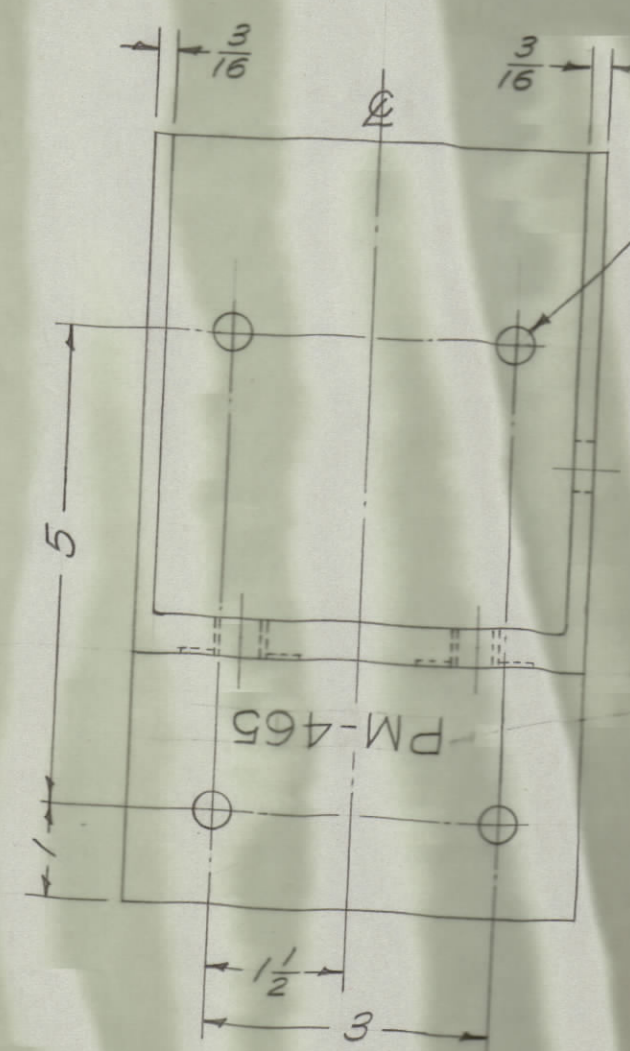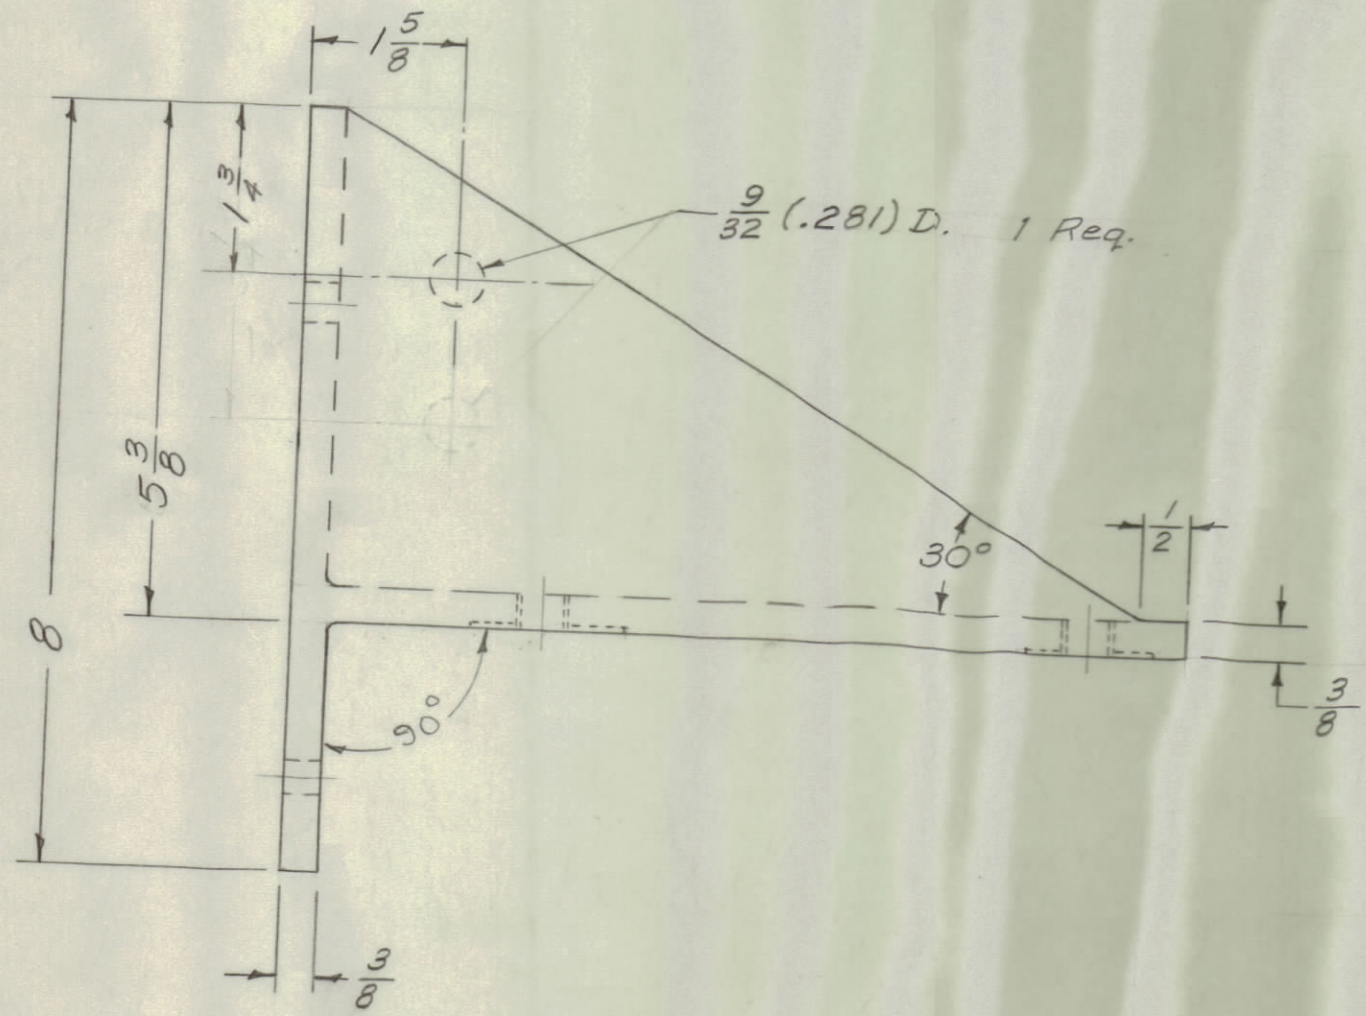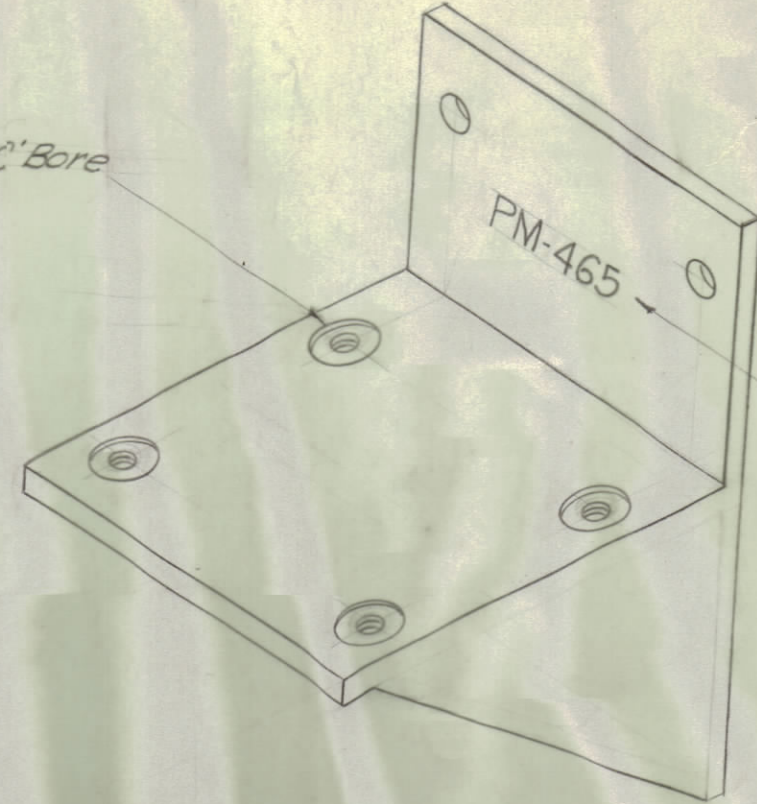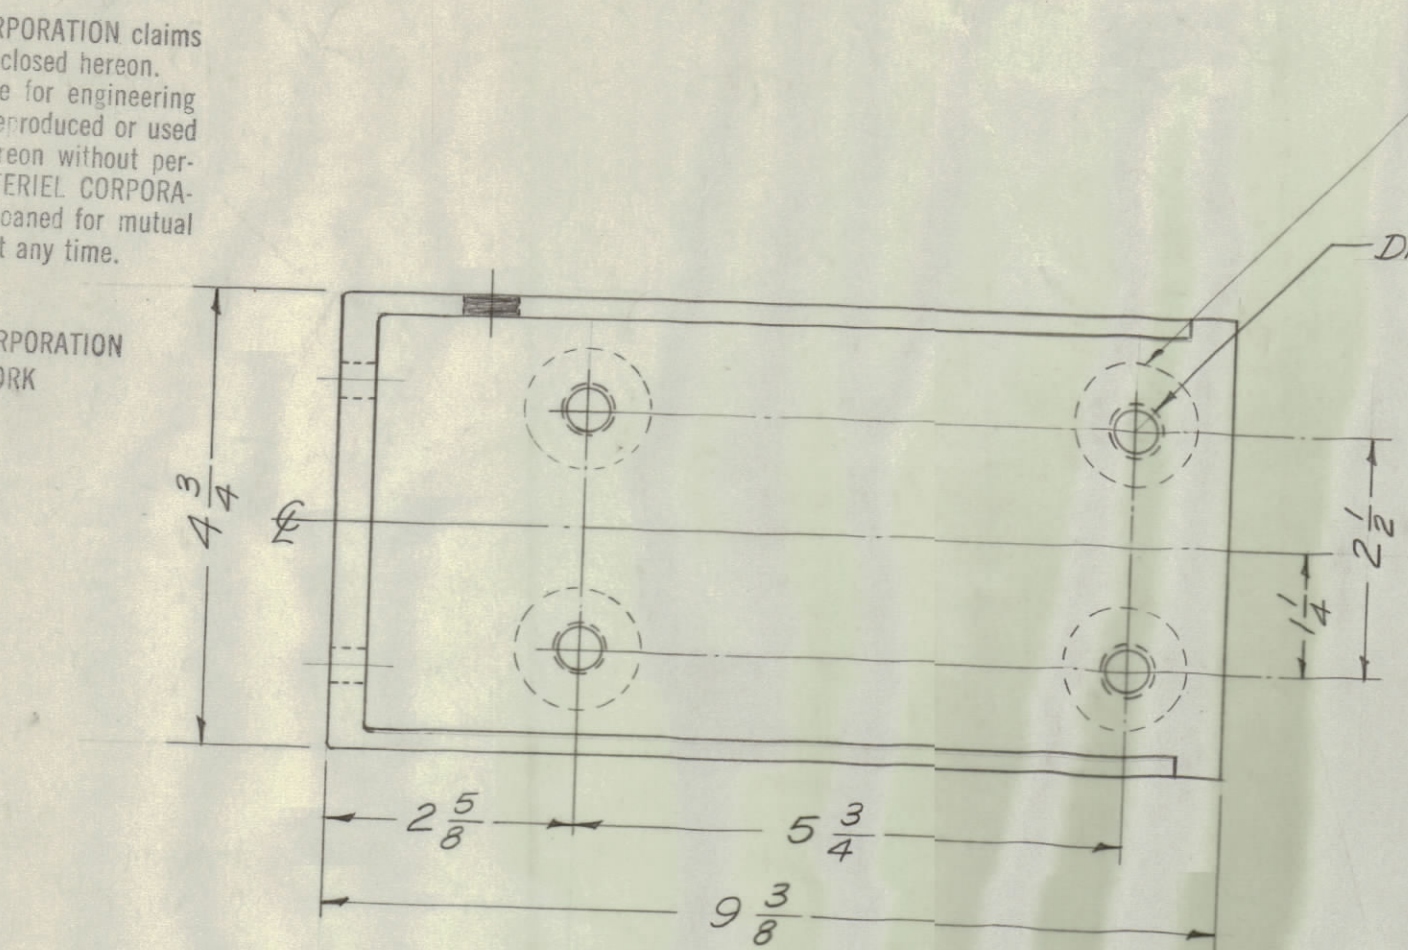

PM-465 A

CASTING NOTES:

1. Use Min. Draft (.062 Max. Draft)
2. Casting Must Be Free Of Porosity. Air Holes & Surfaces Must Be Smooth.
3. Sand Blast To Remove All Sharp Edges.
4. Approx. 3/8 Radius On All Fillets.

FINISH NOTE-
S404 YEL-IRIDITE
S114 Zinc Chromate Primer.
S115 Smooth Grey Enamel.

REV	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	S404-IRIDITE WAS S101-CAUSTIC DIP	12-9 57	1001	P		EMN
TOLERANCES							
DEC. DIM. ±				SCALE: 1/2			
FRAC. DIM. ± 1/64				DRILL, PUNCH, COMMERCIAL STOCK			
ANGULAR DIM. ±				SIZES AND MANUFACTURERS			
TOLERANCES ARE NOT INCLUDED.							

1	TLI-1	652	A-1438	9-24-57
REQ PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		BASE, MOUNTING (TLI-1)	
		Aluminum	
		356-T6	
		Stress Relieved	
		See Note	
		FINISH & SPEC. NO.	
		16 9-24-57	
		DRAWN	
		CHECKED	
		FINAL APPROVAL	
		Supersedes PM-446, PM-447, PM-448 & A-1434	
		PM-465 A	