REQ. PER UNIT	USED ON			PM-492
	MODEL	ASS'Y. NO.	DATE	
1	RFA-1		6-2-58	

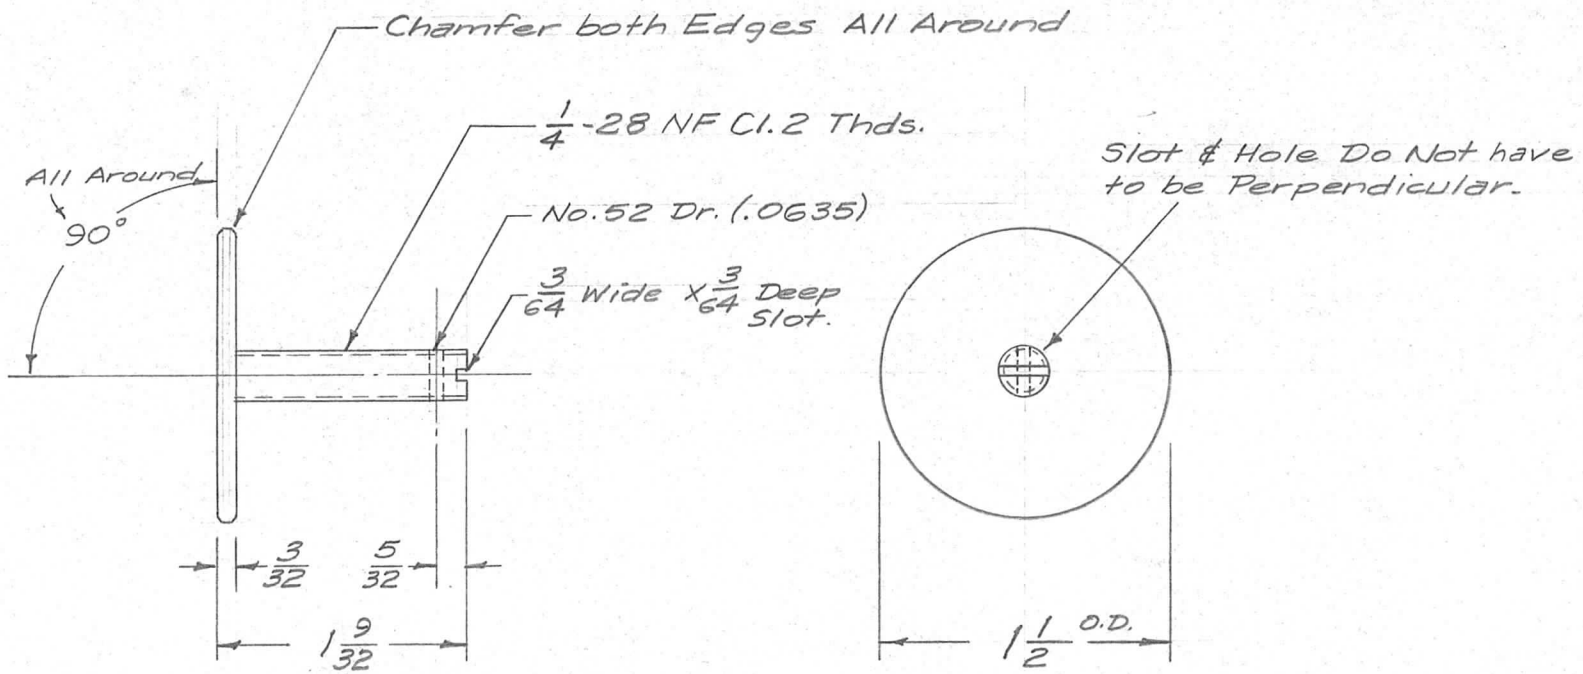

Note: Rotor Plate O.D. must be concentric with threaded Stud O.D. to within .005"

[redacted]

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ± .5°

SCALE: FULL

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		11	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE	ROTOR, NEUTRALIZING CAP.	
		BRASS		
		MATERIAL		

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
5245 Silver Plate .0002		6/2/58		PM-492
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	