


REQ. PER UNIT	USED ON			PM-494	B
	MODEL	ASS'Y. NO.	DATE		
1	VRA-1,2,2A	A-811	6-26-58		

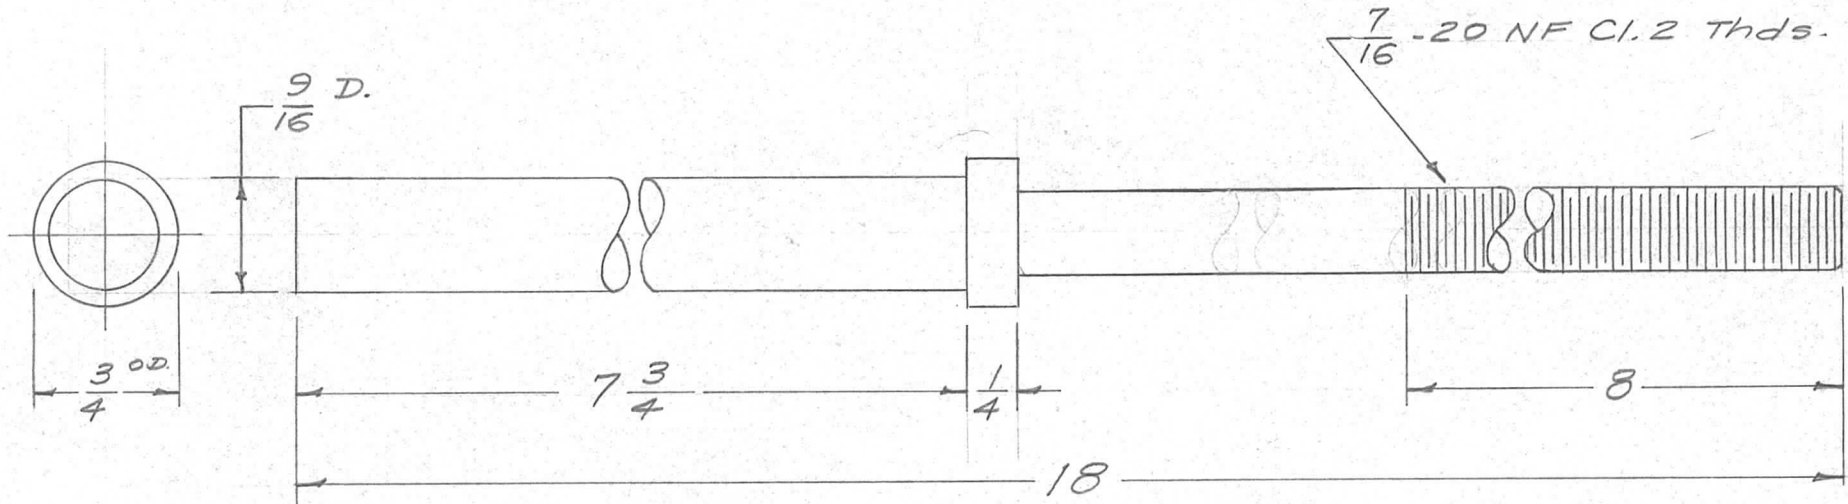

NOTE: S-425 COPPER IRIDITE
COPPER FLASH .0002

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
B	1	ADDED FINISH NOTE	10-13/59	1407	Ph. JH	JH	ah	3/4 O.D. Rod		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	B
A	1	FINISH WAS CADMIUM PLATED	3/18/59	—	JH	JH	ah	Stainless Steel			
TOLERANCES			SCALE: FULL	SUPERCEDES A-797, PM-302, 303, & 429				303	16 4/26/58	JH	ah
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.			TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
FRAC. DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES			SEE NOTE					PM-494
ANGULAR DIM. ±						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		B