REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	PM-700	B
16	GPT-40K	AX-267	6-22-61		

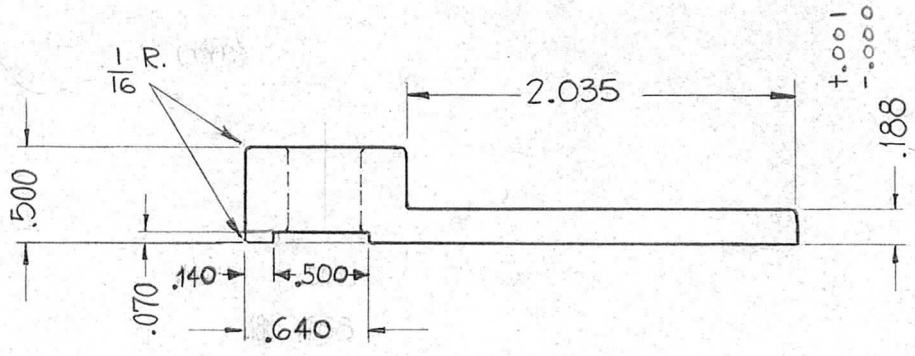

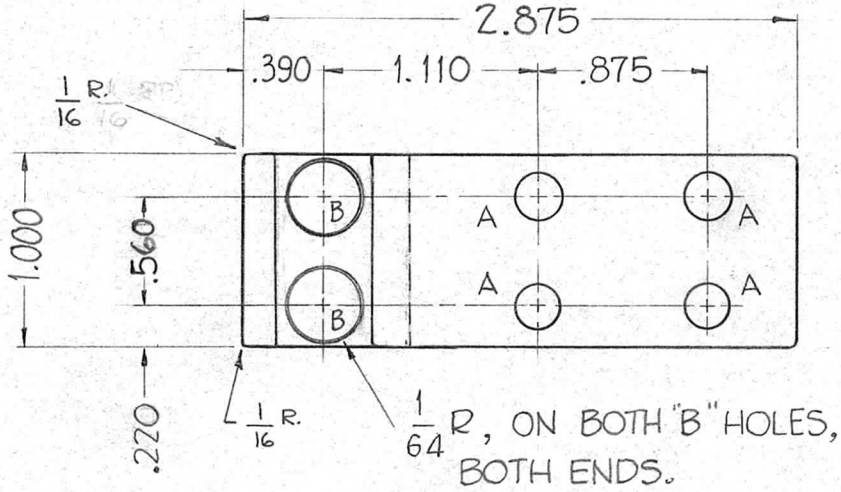

HOLES

A - 7/32 DIA. — 4 REQ.

B - .380 +.001 -.000 DIA. — 2 REQ.

FINISH (UNLESS NOTED OTHERWISE)

ROUND ALL EDGES TO 1/32" R.
S-245 - SILVER PLATE BRIGHT
S-423 - IRIDITE, 18-P SILVER KOTE

NOTE - ALL DIMENSIONS APPLY AFTER PLATING

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	2	1/32 R. ADDED TO FINISH NOTES	10-2-62	7303	GS		
	1	1/16 R. ADDED					
A	1	TOL. ADDED TO .188 DIM	8-14-62	7060	G.S.		

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: DO NOT SCALE

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
AS NOTED				

STOCK SIZE: BRASS

MATERIAL: HALF HARD FREE MACH.

TYPE & TEMPER | HEAT TREAT. SPEC.: SEE NOTE

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CONTACT HOLDER, BANDSWITCH

DRAWN	CHECKED	FINAL APPROVAL
John C. Biele	W.A.F.	LB/FB

ELEC. DES. APP. | MECH. DES. APP.

PM-700 B

FORM 108-A