


| | | | | | |
|----------------|---------|------------|---------|--------|---|
| REQ. PER. UNIT | USED ON | | | PM-746 | A |
| | MODEL | ASS'Y. NO. | DATE | | |
| 4 | HCR-1/T | A3042 | 3/29/61 | | |

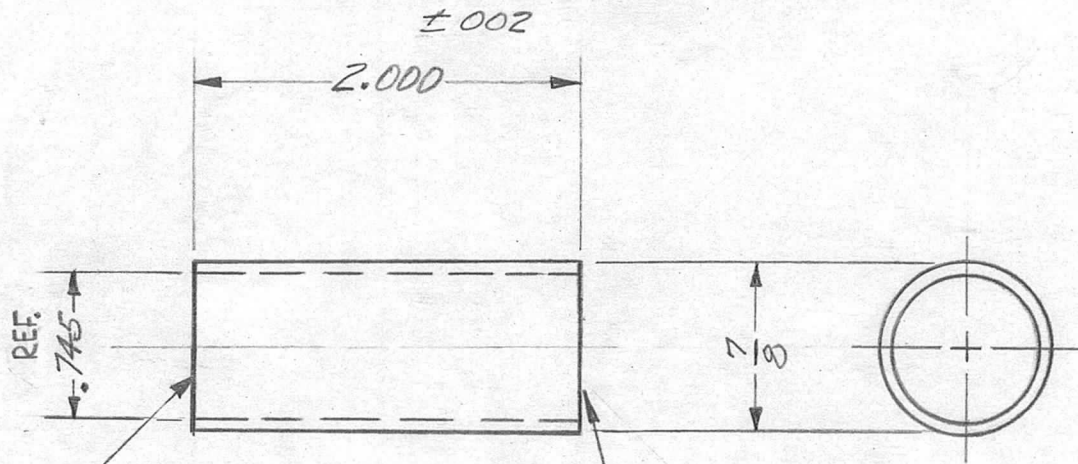

SURFACE MUST BE MACHINED SQUARE

SURFACE MUST BE MACHINED SQUARE

PROVIDE WITH ALUMINUM TUBE IN CENTER
 WITH 1/8" DIA. HOLES

| | | | | | | | | REQ. ITEM | PART NO. | J. ANGER | DESCRIPTION | SYMBOL | |
|----------------|------|----------------------------|---|---------|----------------|----------------|-----------|--------------------|-------------------|------------------------------|----------------|----------------|--------|
| | | | | | | | | 7/8 DIA. | | THE TECHNICAL MATERIEL CORP. | | | |
| | | | | | | | | STOCK SIZE | | MAMARONECK, NEW YORK | | | |
| | | | | | | | | ALUMINUM | | SPACER, SLEEVE | | | |
| | | | | | | | | MATERIAL | | | | | |
| A | I | TYPE & TEMPER WAS 3003-H14 | 6-1-62 | TK | VR.R. | JWA | JC | 6061-T6 | ab | JP | BP | | |
| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL | |
| TOLERANCES | | | SCALE: | | | | | S404 YEL. IRIDITE | | J. ANGER | | | PM-746 |
| DEC. DIM. ± | | | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES. | | | | | FINISH & SPEC. NO. | | ELEC. DES. APP | MECH. DES. APP | | A |
| FRAC. DIM. ± | | | | | | | | FINISH & SPEC. NO. | | ELEC. DES. APP | MECH. DES. APP | | |
| ANGULAR DIM. ± | | | FINISH & SPEC. NO. | | ELEC. DES. APP | MECH. DES. APP | | | | | | | |