REQ. PER UNIT	USED ON			PM-995	Ø
	MODEL	ASS'Y. NO.	DATE		
12	GPT-200K(AT-105)	A-2765	9-19-63		

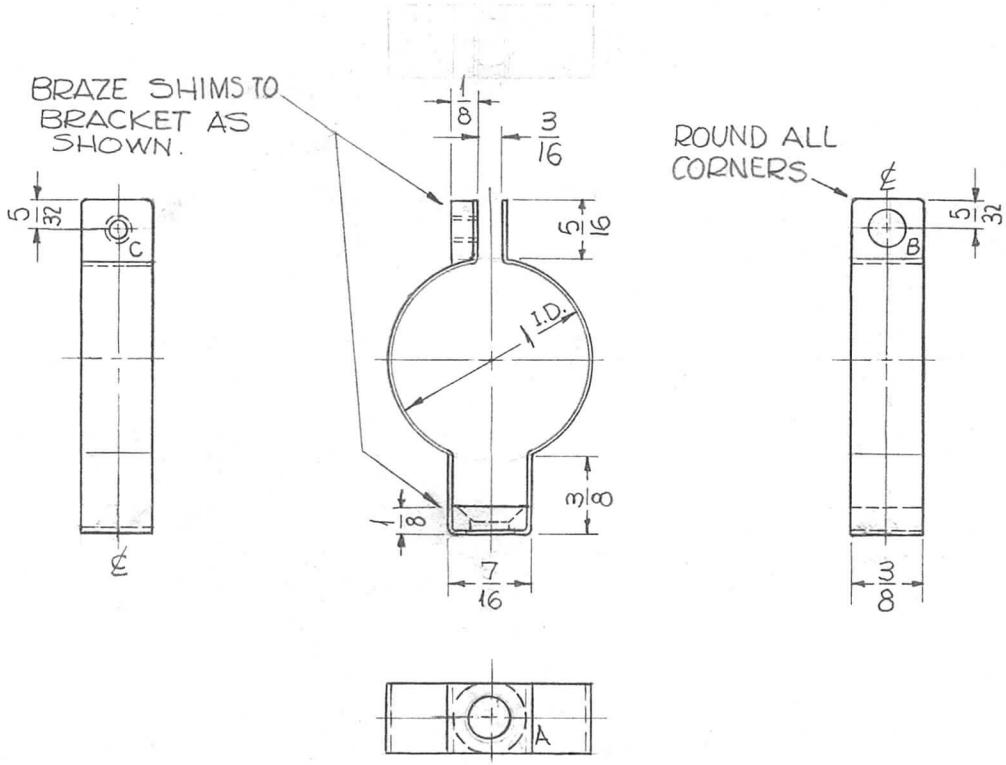

HOLES:

A ~ C' SINK FOR 10-32 FHS — 1 REQ.

B ~ 11/64 DIA. — 1 REQ.

C ~ DRILL & TAP FOR 6-32 — 1 REQ.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
O	ORIGINAL RELEASE FOR PRODUCTION	5-13-64	O	A.M.		
	SHIM ADDED TO "A" HOLE					
	"A" HOLE WAS 15/64					

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1=1

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.020 THICK	STOCK SIZE	
		COPPER	MATERIAL	
		S-245 SILVER PLATE	TYPE & TEMPER / HEAT TREAT. SPEC. / FINISH & SPEC. NO.	

F. BUDETTI

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CLAMP, ELECTRICAL

DRAWN	CHECKED	FINAL APPROVAL
SRG	aa	RAC
ELEC. DES. APP.	MECH. DES. APP.	
JR	aa 2/6/64	PM-995 Ø