

# STANDARD DRAWING

REQ.  
PER  
UNIT

MODEL


USED ON

ASS'Y. NO.

DATE

PO-160

C

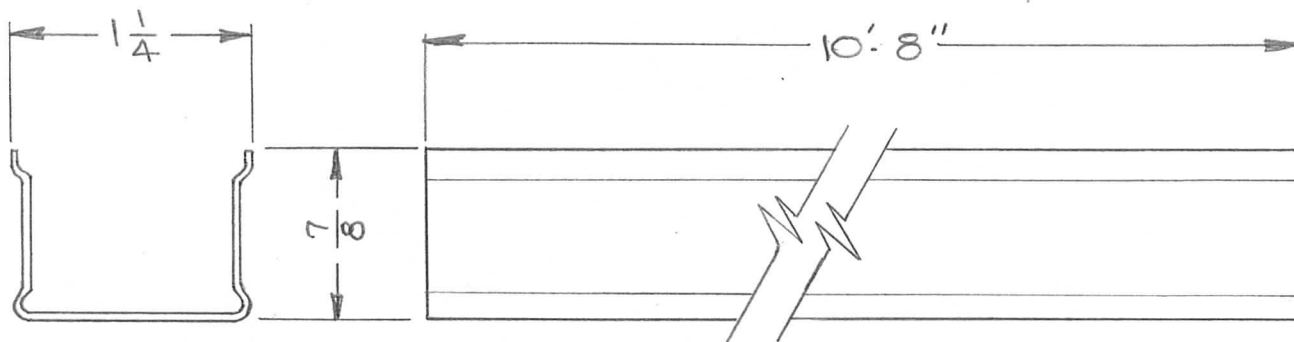

**NOTE:**

MANUFACTURER SHALL SUPPLY  
CONDUIT STRIP WITHOUT KNOCKOUT  
CABLE HOLES AND KNOCKOUT  
MOUNTING HOLES.

**REFERENCE**

PO163 COVER  
JJ170 CONNECTOR  
PO161 END FITTING, BLANK  
PO162 END FITTING, CABLE ENTRY

REF: WIREMOLD NO. G2100B SPECIAL  
WITHOUT KNOCKOUTS.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
C	4	NOTE W/KNOCKOUTS DELETED	7-23-64	11915	[Signature]	[Signature]	[Signature]				THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK CONDUIT, RACEWAY, METAL	C
	3	NO KNOCKOUT NOTE ADDED										
	2	REF WAS WIREMOLD G2100B										
	1	LENGTH WAS 10'-0"										
B	1	G) ADDED ON REF, FINISH ADDED	2-27-62	6452	[Signature]	[Signature]	[Signature]					
A	1	CHART DELETED	4/27/59		[Signature]	[Signature]	[Signature]					
TOLERANCES			SCALE:			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±								GREY		[Signature]	[Signature]	PO-160
								FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	C