


STANDARD DRAWING

REQ. PER. UNIT	USED ON			PO-163 D
	MODEL	ASS'Y. NO.	DATE	

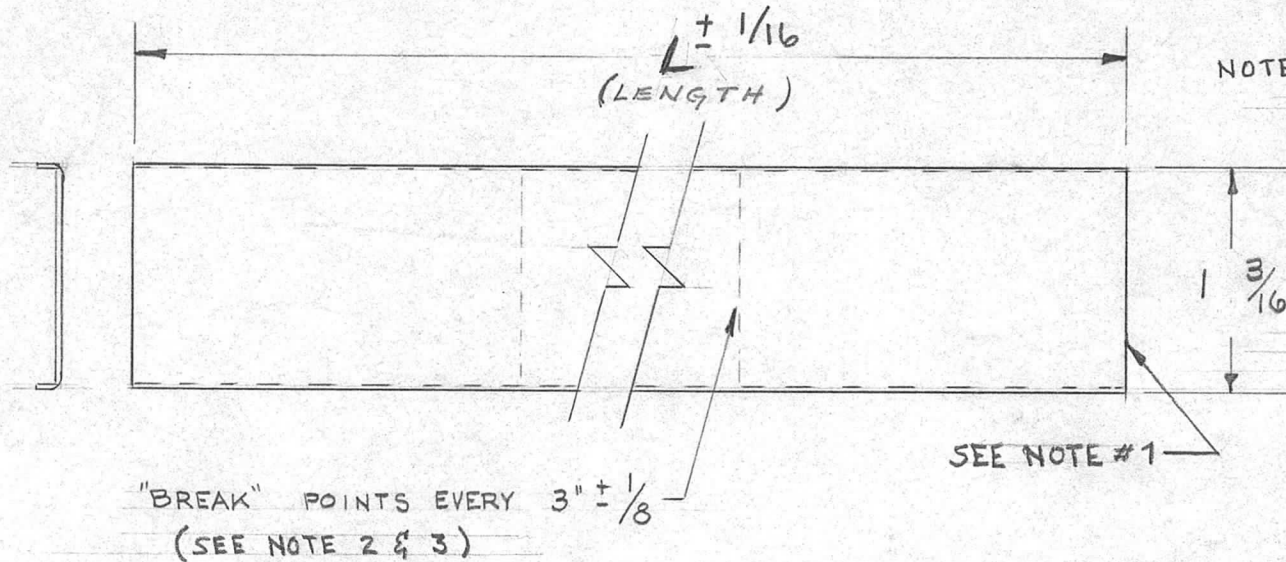

NOTE: 1. CUT ENDS MUST BE DE-BURRED BUT NEED NOT BE FINISHED NOR PAINTED.
 2. BREAK POINTS TO BE USED ONLY ON "3.000" LENGTHS. LENGTHS GREATER THAN 3 INCHES MUST BE MEASURED.
 3. CAN BE PURCHASED IN 5 FOOT LENGTHS (W/BREAK POINTS) OR 10 FOOT LENGTHS (W/OUT BREAK POINTS AND CUT TO LENGTH BY TMC.

SEE NOTE #1

FOR USE WITH T.M.C. CONNECTOR STRIP
 PO 160 T.M.C. CONNECTOR STRIP

PO 163 - 3.000
 TMC DWG NO 1
 LENGTH INCHES
 EXAMPLE - 2.500 = 2 1/2
 3.937 = 3 15/16

D		NOTES ADD: "REF." DELE. STOCK SIZE, MAT'L, FINISH & SPEC. NO & 5401 ADDED.	2/26/65	13578	2-L	JCS	JCS
C	1	G) ADDED ON REF, FINISH ADDED	2-27-62	6452	1 L	JCS	JCS
B	1	PART NO. DESIGNATION WAS PO-163-3, EXAMPLES ADDED	3-10-61	4379	W.A.F.	JCS	JCS
A	1	PART # CLARIFIED	7/29/59			JCS	JCS
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: 5401-237 (G2100C)				
DEC. DIM. \pm FRAC. DIM. \pm ANGULAR DIM. \pm			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				

REQ.	ITEM	PART NO.	DESCRIPTION		SYMBOL
		.040 $\pm .015$ - .010	THE TECHNICAL MATERIEL CORP.		
		STOCK SIZE	MAMARONECK, NEW YORK		
		COLD ROLLED STEEL	COVER, CONNECTOR STRIP		
		MATERIAL			
		TYPE & TEMPER	DRAWN	CHECKED	FINAL APPROVAL
		HEATTREAT. SPEC.			
		FINISH & SPEC. NO.			
		ELEC. DES. APP.			
		MECH. DES. APP.			

PO 163 D