


PO-172 D

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.


TMC PART NO.	IMPEDANCE	MFR. PART NO.
PO 172-50	50 OHMS	1561A
PO 172-70	75 OHMS	1571

SUPPLIED BY MFR.
 O-RING - 1 REQ.
 SCREW, MACHINE - SCHH3118NR24 - 4 REQ.
 WASHER, LOCK, SPLIT - LWS31HRN - 4 REQ.
 NUT, HEX - NTH3118NR16 - 4 REQ.
 CONNECTOR, INNER - PO 218-50 - 1 REQ.

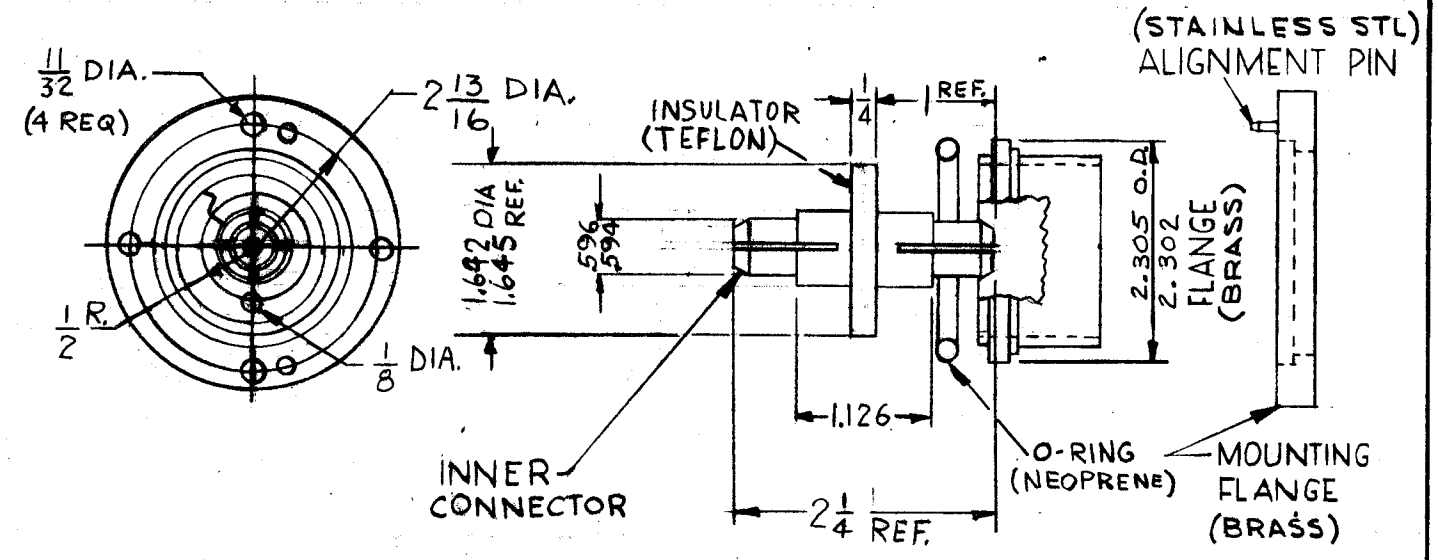

PO-172-50

SUPPLIED BY MFR.
 O-RING - 1 REQ.
 SCREW, MACHINE - SCHH3118NR24 - 4 REQ.
 WASHER, LOCK, SPLIT - LWS31HRN - 4 REQ.
 NUT, HEX - NTH3118NR16 - 4 REQ.
 CONNECTOR, INNER - PO 218-70 - 1 REQ.

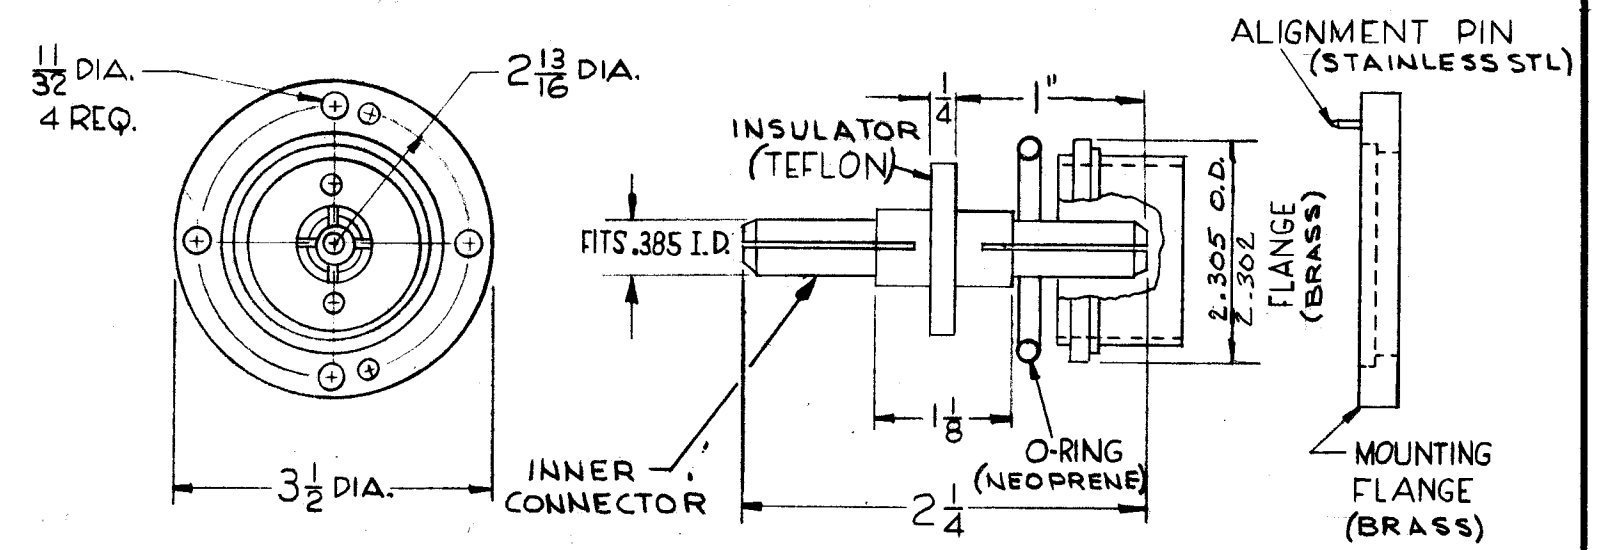

PO-172-70

D	PO-172-50 REV. PHOSPHOR BRONZE DEL	11-20-67	18595	HG	EFM	
C	ADDED MATL. NOTES, CALLOUTS; DELETED MATL. PHOS. FROM PO-172-50, 70	2/3/66	15681	JL	EFM	
B	ON PO-172-70, FLANGE O.D. WAS 2 3/16" DIM WAS 1/2" ON PO-172-50, FLANGE O.D. WAS 2 3/16" TOL PO-172-50 ADDED TO 3/4" DIM.	7-13-62	6912	EFM	EFM	
A	Redrawn & Revised, 70 Ohm Version Added	1-3-62	6101	EFM	EFM	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/20
 SCALE: S401-31
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	TRC-5000	MODEL	SECTION	ASS'Y. NO.	DATE
					1-3-62
USED ON					

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
			FLANGE, SOFT SOLDER	
			15/8 EIA STYROFLEX	
			G.G. [Signature]	EFM
			NONE	
			ELEC. DES. APP. MECH. DES. APP.	
			PO 172	D