


# STANDARD DRAWING

REQ. PER UNIT	USED ON		PX-336	A
	MODEL	ASS'Y. NO.		

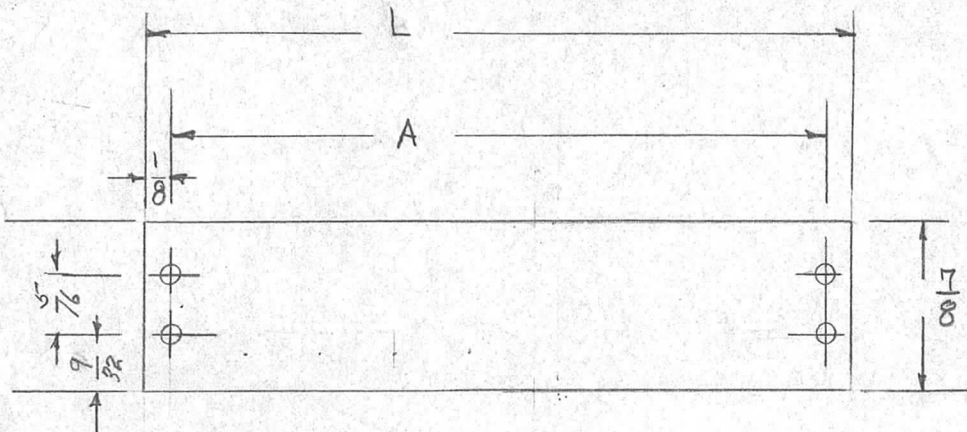

4 holes Req'd 9/64

TMC No.	"A"	L
PX-336-2	1/8	1 3/8
PX -3	1/2	1 3/4
PX -4	1 7/8	2 1/8
PX -5	2 1/4	2 1/2
PX -6	2 5/8	2 7/8
PX -7	3	3 1/4
PX -8	3 3/8	3 5/8
PX -9	3 3/4	4
PX -10	4 1/8	4 3/8
PX -11	4 1/2	4 3/4
PX -12	4 7/8	5 1/8
PX -13	5 1/4	5 1/2
PX -14	5 5/8	5 7/8
PX -15	6	6 1/4
PX -16	6 3/8	6 5/8
PX -17	6 3/4	7
PX -18	7 1/8	7 3/8
PX -19	7 1/2	7 3/4
PX -20	7 7/8	8 1/8
PX -21	8 1/4	8 1/2

Ref TMC DWG TM-102

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL							
								1/32		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	INSULATOR, TERMINAL STRIP BARRIER Type							
								Stock Size										
A	-	OR FIBER ADD TO MATL.	10/8/65	14950		F.V.W.	JCB	Phenolic OR Fiber										
TOLERANCES			SCALE:					MATERIAL										
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					XXX Penolyte		<table border="0"> <tr> <td>DRAWN</td> <td>CHECKED</td> <td>FINAL APPROVAL</td> </tr> <tr> <td></td> <td></td> <td>PX-336</td> </tr> </table>			DRAWN	CHECKED	FINAL APPROVAL			PX-336
DRAWN	CHECKED	FINAL APPROVAL																
		PX-336																
FRAC. DIM. ±			TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED									
ANGULAR DIM. ±			BLACK		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.									