REQ. PER UNIT	USED ON			PX-501	A
	MODEL	ASS'Y. NO.	DATE		
1	AX-212	GPT-40K	1/13/60		
1	AX-398	GPT-200K	8-14-63		

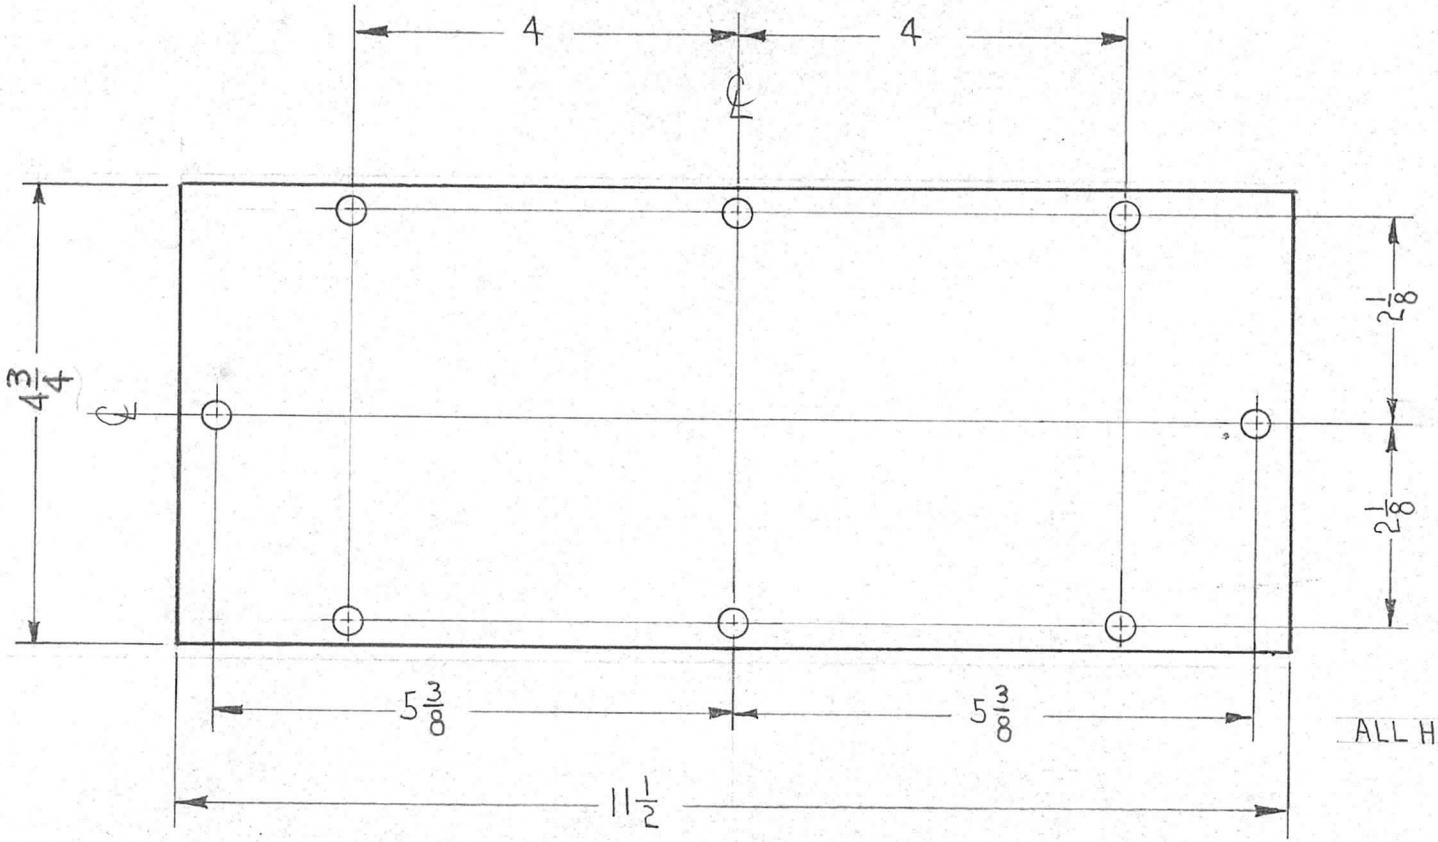

ALL HOLES - 9/64 (.140) D.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	1	4 3/4 DIM WAS 5", IN "USED ON" AX-398 ADDED.	8-14-63	9754	AR	JWB	AG

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: 1/2

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
3/16 THICK				

STOCK SIZE

PLEXIGLAS

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

WINDOW, FRONT PANEL
(CROWBAR DRAWER)

DRAWN	CHECKED	FINAL APPROVAL
W.F.		8-8
ELEC. DES. APP.	MECH. DES. APP.	
Em	RLR	PX-501 A