


PX-536 C

HOLES  
A -  $\frac{13}{64}$  DIA.  
REQ'D.  
8

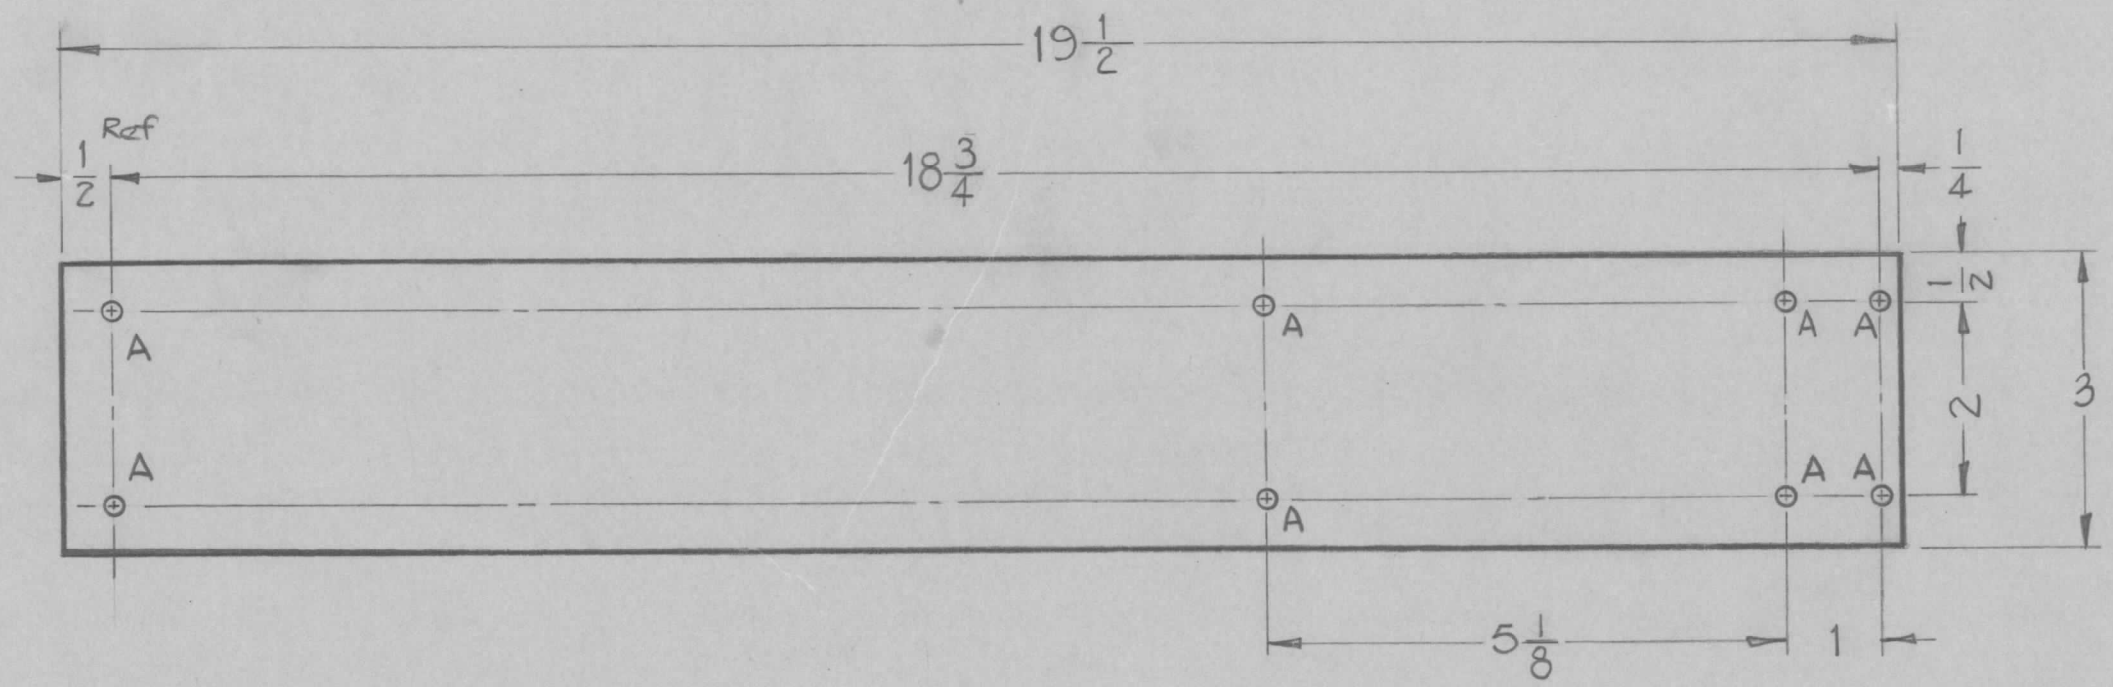

C	2	18 3/4 DIM WAS 17 7/8	3-24-61	4513	MAF	JCB	DB
	1	19 1/2 DIM WAS 18 5/8					
	3	8 'A' HOLES $\frac{13}{64}$ WERE $\frac{3}{16}$					
B	2	17 7/8 WAS 18 1/4	8-9-60	2735	RU	JCB	WR
	1	18 5/8 WAS 19"					
A	1	DIM 5 1/8 WAS 5 3/8	4-13-60	2132	MAF	JCB	DB
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: DO NOT SCALE				
DEC. DIM. $\pm$			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC. DIM. $\pm$			REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. $\pm$							

REF ~ TMC DWG. NO. LD-829(1)

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	1/4	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE	BRACE, FRONT	
	SILICONE GLASS MATERIAL	LOAD RESISTOR	
67		DA Man	JCB
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	PX-536 C

Z	GPT-40K	MOD KIT - 10K	3-17-60
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.
			DATE
USED ON			