
TMC PART NO. 'L"

PX-616-1 33 fT., 5 || N. | REQ. PER. USED ON | DATE |

2 TRC-20K 9-26-61

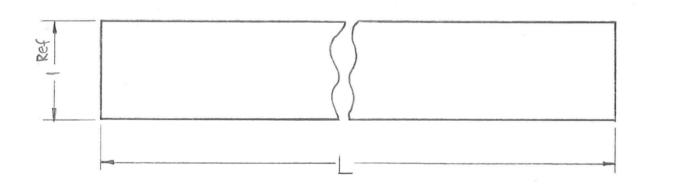

| | | | | | | | | REQ. | ITEM | | PART NO. | e v | DESCRIPTION | ON | SYMBOL |
|---|--------------|--------------|--------|--|--------|---------|-----------|--------|---|--|------------------|--|-------------|-------|--------|
| | | | | | | | | X.OIO | | | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | | |
| | - | | - | | a i e | 10 | - | TEFLON | | | N | INSULATOR, CORE | | | |
| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | | MATERIAL | | | | 1 | | |
| | | TOLERANCES | SCALE: | | | | | | | | | L. L. | RUZZO | 00 B | |
| DEC. DIM. ± FRAC. DIM. ± 164 ANGULAR DIM. ± | | | BEEN C | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES | | | | | | | HEATTREAT. SPEC. | RM. | LB | PX-66 | AL. |
| - | ANOUGH DIVI. | | | REMOVE ALL BONNS AND SHARP EDGES | | | | | FINISH & SPEC. NO. ELEC. DES. APPMECH. DES. APP | | | | | | |