


PX-766 A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

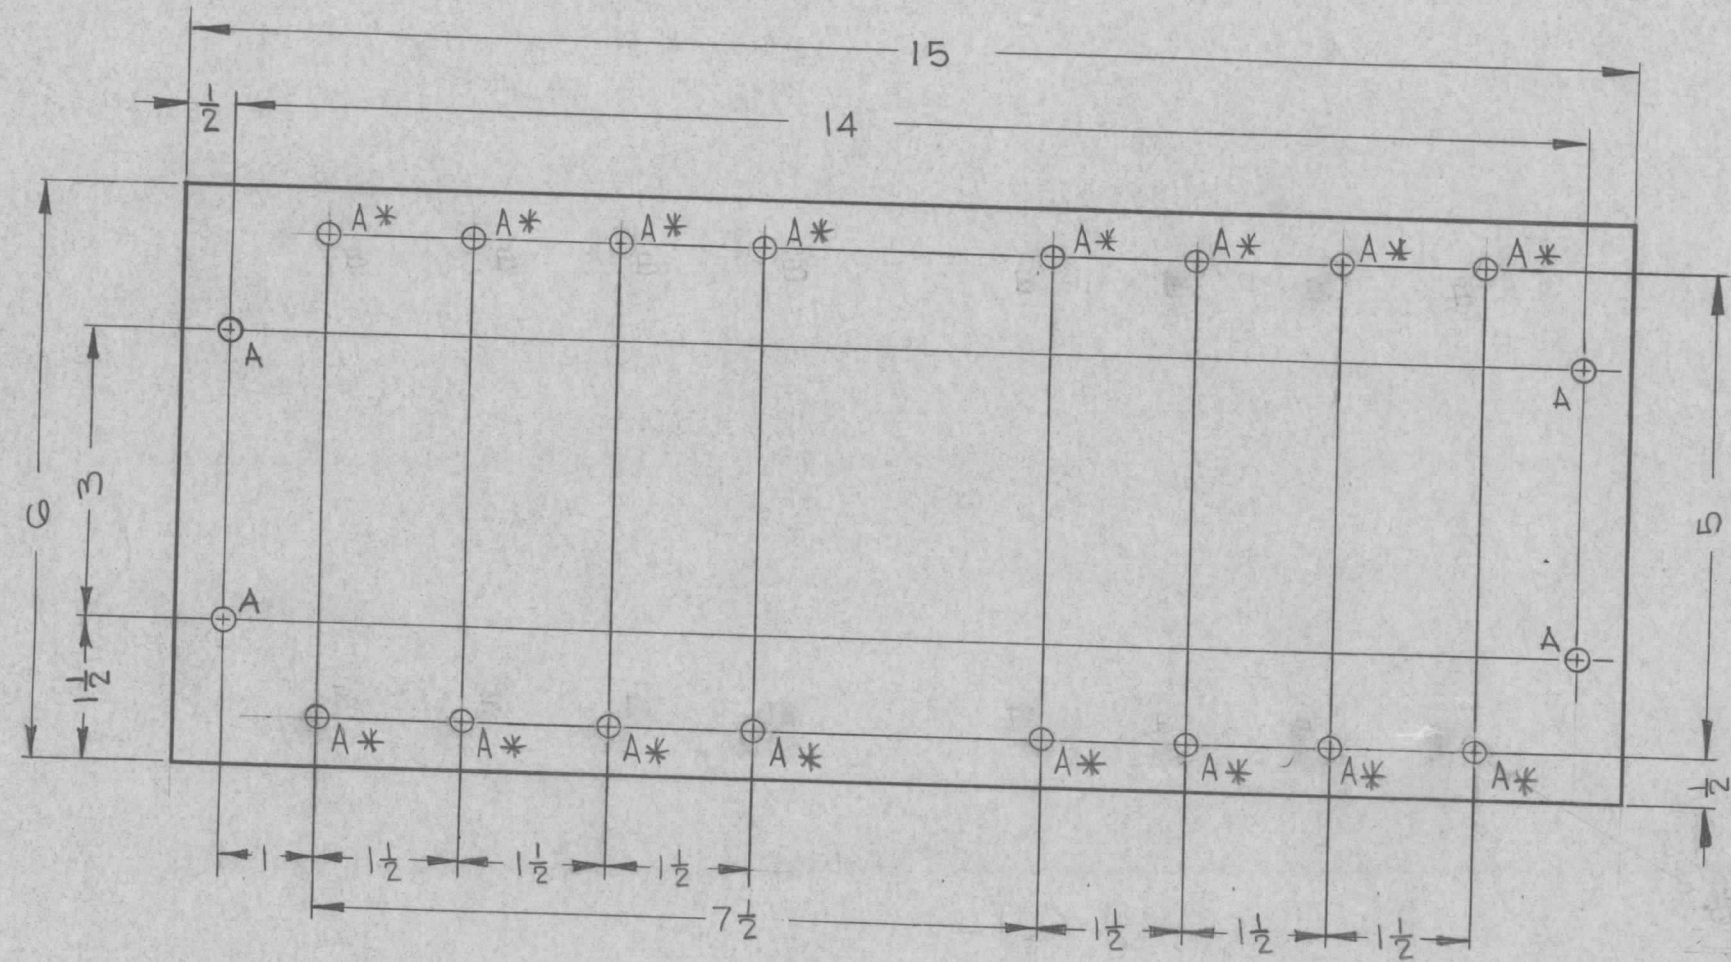

HOLE
 A — 15/64 DIA. THRU — 20 REQ
 B — 1/8 DIA. THRU TO 1/2 IN. DEPTH
 — 120°C MAX. 200-330°C MIN.
 — TAP 1/8 DIA. DEPTH 1/16 IN.
 — TAP #4 CPA-H2
 — INSTALL ITEM (I) 3/4 TO 1/2
 — PITCH BELOW SURFACE
 — PRIOR TO DRIVING TAP —

A* - MOUNT ITEM NO.1 (16 REQ)

FINISH - FUNGUS PROOFING PER TMC SPECIFICATION S-113

IT. I WAS NT-139-SC 415	7.30.64	11974	WB	PC	QB	
ORIGINAL RELEASE FOR PRODUCTION	2/7/64					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE: 1:2
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

1	GPT-200K	AX-394	A-3259	7-24-63
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE

16	1	NT-139-SFI-15	INSERT, THREADED	
REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
3/8 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
PHENOLIC		BOARD, FILTER MOUNTING		
MATERIAL				
XXXXP		7-24-63	aa	4-7-64
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
COLOR: NATURAL		FINISH & SPEC. NO.		
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

PX-766 A