REQ. PER UNIT	USED ON			PX 889	Ø
	MODEL	ASS'Y. NO.	DATE		
1	GPT-10KLF	AP125	3-1-66		

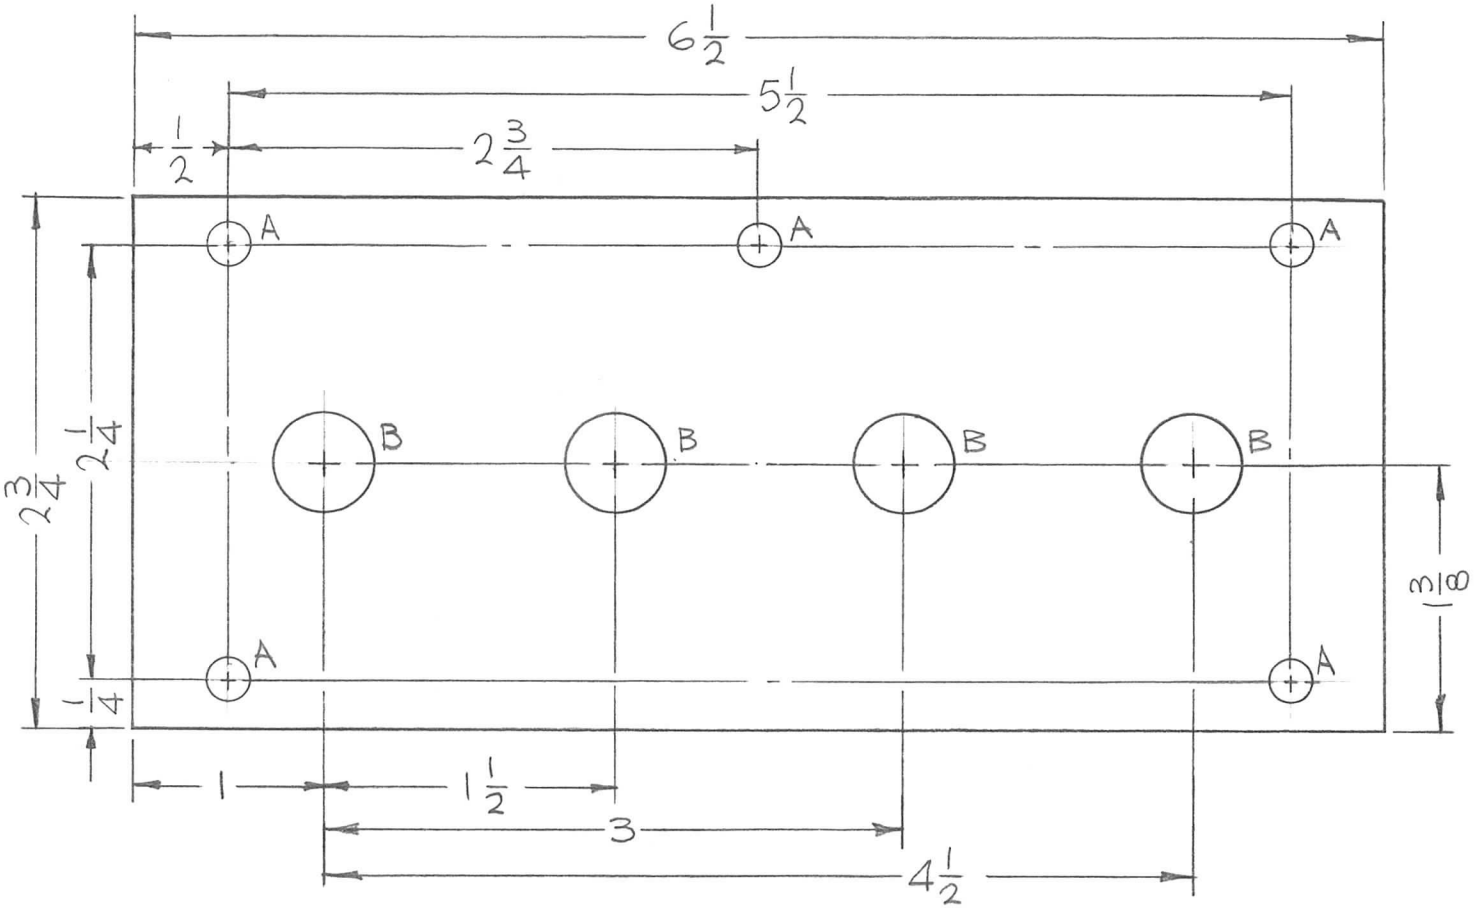

HOLES:
A ~ 13/64 DIA. (5 REQ.)
B ~ 1/2 DIA. (4 REQ.)

1695

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	3-1-66	—	JC	QCB	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		F. BUDETTI		

3/32 THICK
STOCK SIZE

EPOXY
MATERIAL

G-11
TYPE & TEMPER

HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BOARD, FILAMENT

DRAWN	CHECKED	FINAL APPROVAL
	QCB	

ELEC. DES. APP.	MECH. DES. APP.

PX 889 Ø