


	REQ. PER UNIT	USED ON		
		MODEL	ASS'Y. NO.	DATE
PX914-1&2	1EA	RPTA-1	AS127	1-19-65
PX914-2	.2	TLAA-2.5K	AS128	12-9-66
PX914-2	.2	TLAB-2.5K	AS128	12-9-66

PX914 A

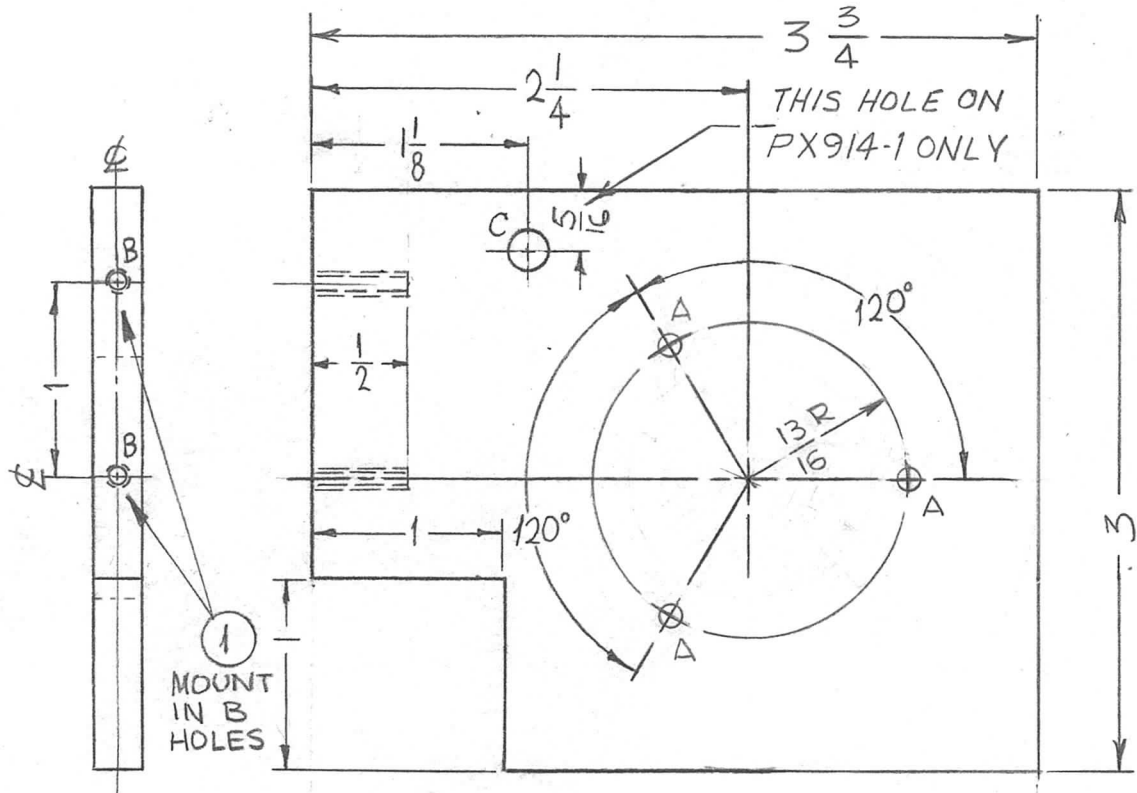

HOLES	DESCRIPTION	REQ.
A	11/64 DIA.	3
B	DRILL FOR 6-32 HELI-COIL	2
C	SEE CHART BELOW	1

TMC P/N	"C" HOLE
PX914-1	13/64
PX914-2	NONE

A	COMPLETELY REV	3.14.68	18809	H.S.	FB							
Ø	ORIGINAL RELEASE FOR PRODUCTION	12-9-66		Jc			2	1	NT 139SC06-30	INSERT, SCREW, THREAD	B	
X4	"B" HOLE WAS 4-40 DIA	8-19-66	X4	GDL			REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL	
X3	DIA "A" HOLE WAS 1/8	7-14-66	X3	G.D.L			1/4 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK SUPPORT, COIL			
X2	HOLE 1/4 D. ADDED	6-9-66	X2	G.D.L		STOCK SIZE						
X1	CUTOUT & C HOLE ADDED	7-28-65	X1			EPOXY						
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						SCALE	G11					
						1:1	TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	SRG								
				FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		PX914 A		