TMC P/N	A	B	C	D	E	F	G	H	J	K
PX940-1	4 3/8	3	1-7/8	NONE	—	NONE	—	NONE	NONE	NONE
PX940-2	4 7/8	8	3 5/8	4 1/8	1 9/16	3/16	7/16	3/32	1/4	8-15/16

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE
4	GPT-200K		5-10-65

PX940 B

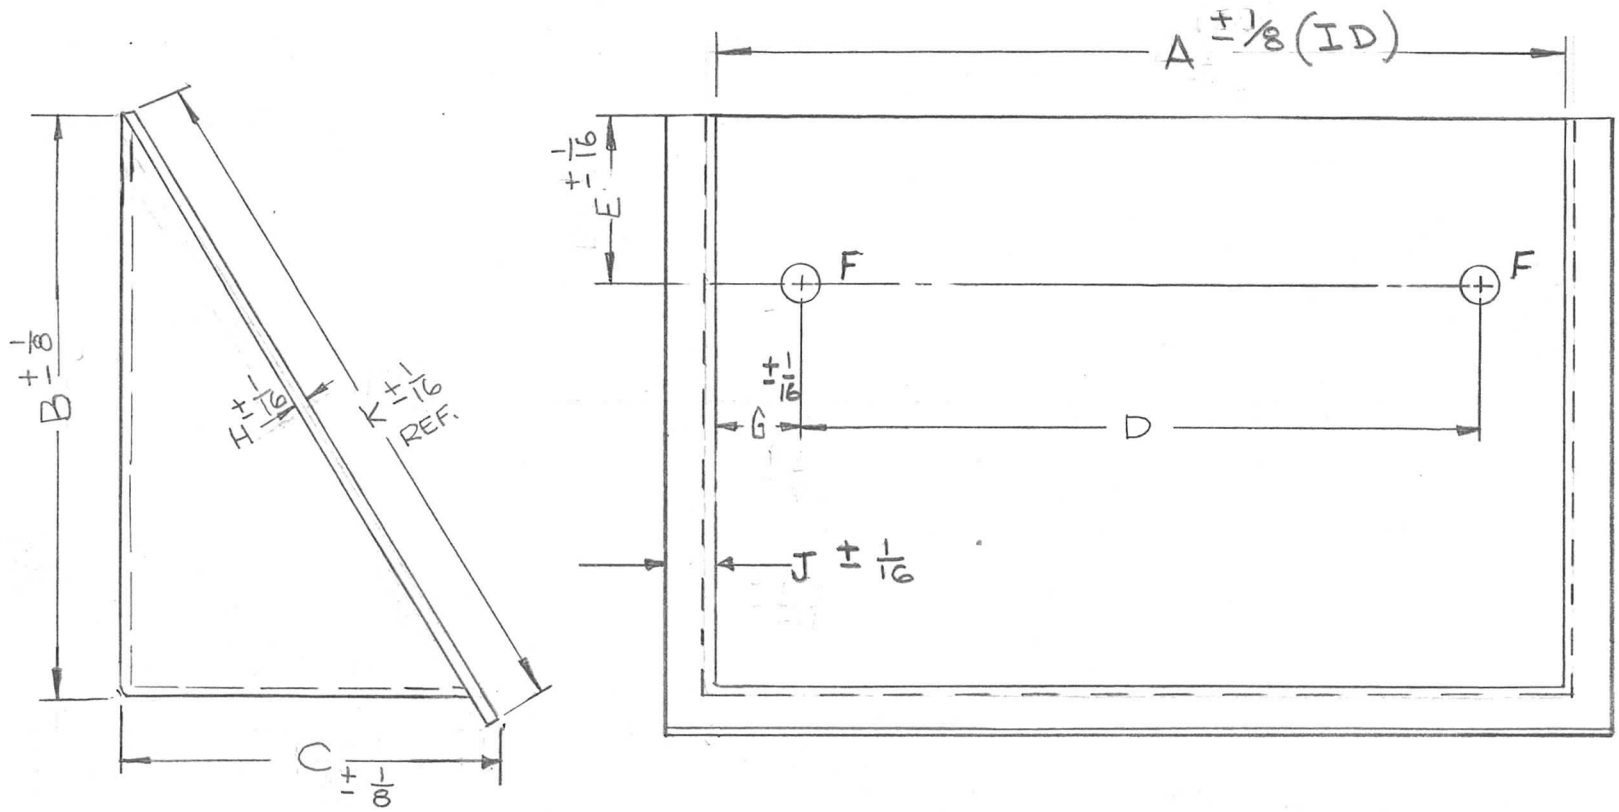

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	COMPLETELY REVISED	8/25/67	18474	H.G.		F.B
A	DWG TABULATED	10.12.66	17029	WHW		
∅	ORIGINAL RELEASE FOR PRODUCTION	8/23/61	∅			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE DO NOTE SCALE

DECIMALS .X ±.05 .XX ±.01 .XXX ±.005 — TOLERANCES — FRACTIONS ± 1/64 ANGLES ± 0° 30′

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			F. BUDETTI	

1/16 THICK (MIN) — STOCK SIZE

GRAY, HI-IMPACT POLYSTYRENE or EQUIV. — MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC. | FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COVER, ELECT. PROTECT

DRAWN	CHECKED	FINAL APPROVAL
SRG	JCB	9/27/65

ELEC. DES. APP.	MECH. DES. APP.

PX940 B