
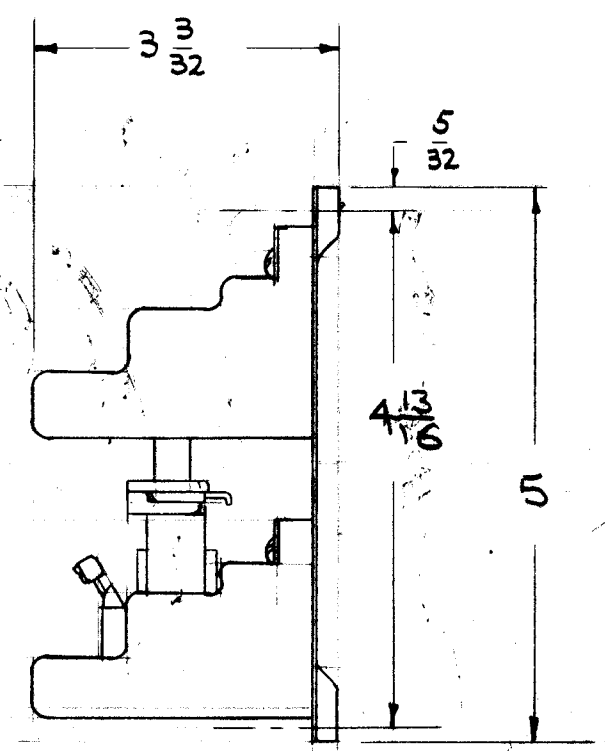


RL-132

MODEL	FUNCTION
GPT-40K	CONTACTOR, BLOWER

ELECTRICAL SPECIFICATIONS

4471-60021
 TYPE - H.R. OPEN
 POLES - 6 NORMALLY OPEN
 COIL VOLT - 208-220V, 50/60 CYCLE
 CONT. RATING: 10 AMPS A.C.

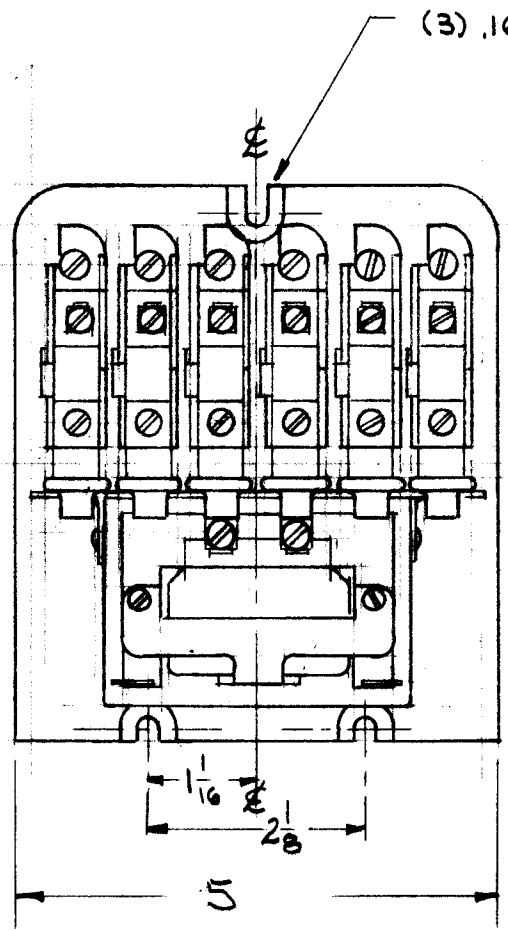

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: S401-32 (4471-60021)				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
FRAC. DIM. ±							
ANGULAR DIM. ±							

REQ. PER UNIT	GPT-40K	PROJECT NO.	ASSY. NO.	DATE
	MODEL			12-15-59
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK.	
STOCK SIZE		RELAY, A.C.	
MATERIAL		6 POLES	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
		Em	RL-132
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.