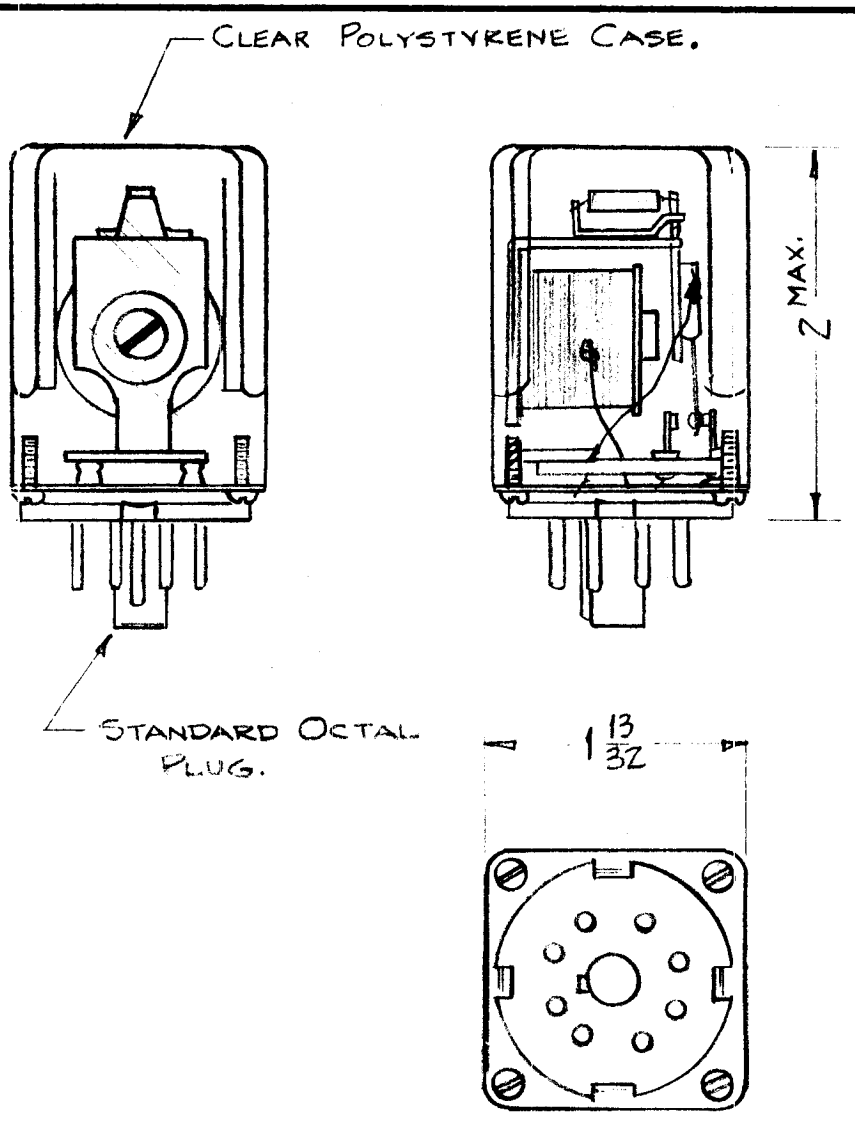

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	RL-140
1	AFC-1		8-9-60	

SPECIFICATIONS

CONTACTS - 1/8" FINE SILVER RATED AT 5 AMPS

COIL RESISTANCE ~ 10,000 OHMS MAX.

COIL CURRENT ~ 5 MA.

DOUBLE POLE, DOUBLE THROW (DPDT)

COIL POWER REQ: 250 MW

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: S-401-111 (MKF-2-10,000)

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

RELAY, ARMATURE, OCTAL

DRAWN	CHECKED	FINAL APPROVAL
D.C.		
ELEC. DES. APP	MECH. DES. APP	RL-140

FORM 108-A