
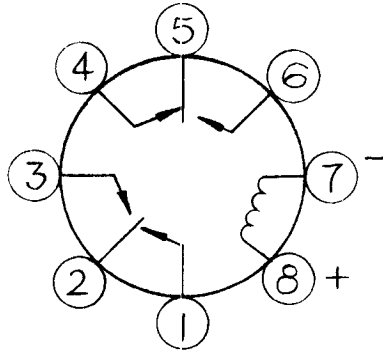


STANDARD DRAWING

REQ. PER UNIT	USED ON			RL173	Ø
	MODEL	ASS'Y. NO.	DATE		
1	KMCU-1		5-6-66		

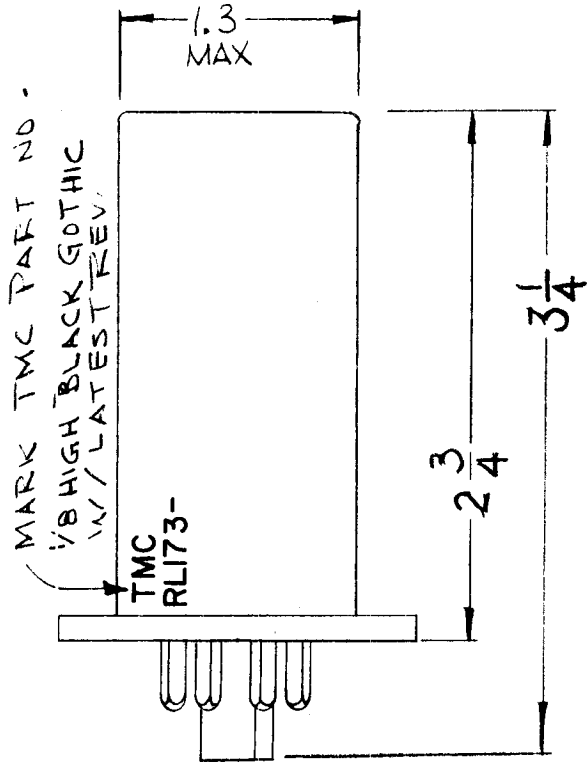

SPECIFICATIONS

CONTACTS:

QUANTITY: 8
 FORM TYPE: 2C
 VOLTAGE RATING: 250V MAX @10 WATTS
 CURRENT RATING: 500MA MAX @10 WATTS
 CONTACT RESISTANCE: .150Ω MAX INITIAL.

COIL:

NOMINAL VOLTAGE: 24VDC
 MUST OPERATE: 18VDC
 MUST RELEASE:
 COIL RESISTANCE: 800Ω ±10%
 OPERATE TIME: 1MS NOM. INCLUDING BOUNCE, MAKE & BREAK
 TEMPERATURE RANGE: -40°C TO +65°C
 INTEGRAL MAGNETIC SHIELD
 CASE TYPE:
 MARKING: ON SIDE

NOTES

- OCTAL BASE MATES WITH TS101 & TS165
- REPLACEMENT FOR RL170

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		//	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK				
			RELAY, PLUG-IN				
			DRY REED				
					WHD	JND 6/16/66	M. Han
			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
			FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	RL173	Ø

Ø	ORIGINAL RELEASE FOR PRODUCTION	6-22-66	Ø	WHD	JND	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	5401-310(3-2234)		