

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.


STANDARD DRAWING

RR-104-D

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

USED ON

MODEL	PROJECT NO.	ASS'Y. NO.	DATE

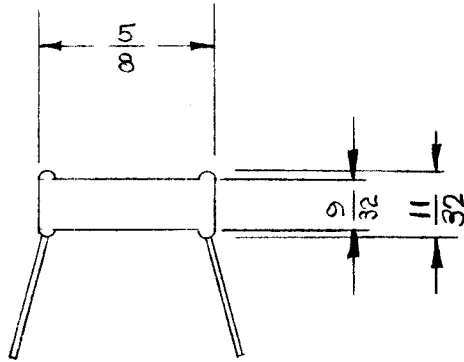

DIMENSIONS FOR REFERENCE ONLY

1/2 WATT
 1 OHM TO 1 MEGOHM
 ± 1% TOLERANCE
 500 V - RECOMMENDED VOLTAGE.

A three or four digit number may be used depending upon the accuracy requirement. In every case, the last digit will indicate the number of zeros.

- e.g. RR-104-5R00 = 5.0 Ω
- 5R050 = 5.05 Ω
- 501 = 500 Ω
- 5050 = 505 Ω
- 5051 = 5050 Ω

REF: CONTINENTAL CARBON FILM TYPE NR20

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
#			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
STOCK SIZE				
#			RESISTOR, FIXED	
MATERIAL			METALLIZED FILM	
WEIGHT PER PC.			C.D.D. 1-13-53	
TYPE & TEMPER			ORB ELEC. DES. APP.	
HEAT TREAT. SPEC.			G.T.O MECH. DES. APP.	
FINISH & SPEC. NO.			HAD 1-16-53 CHECKED	
FINAL APPROVAL			RR-104 D	

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
D		RELOC. 9/32; ADD. 11/32"	4/4/66	16064	HLA	ORB	QC
C	1	Manufacture Designation Clarified - Range was 1/2 to 5 MΩ	2/13/67	3	HAD	P.L.K.	A.J.J.
B	1	TYPE NR-20 WAS X 1/2	5/17/55	2	HAD	C.D.D.	W.D.E.
A	1	EXPLANATION ADDED TO	1/1/54	CR-7	C.D.D.	HAD	W.D.E.

TOLERANCES		SCALE
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	#

DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.