


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

STANDARD DRAWING

RR-109 A

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON		
	MODEL	PROJECT NO.	ASS'Y. NO.
1	PMO-1	285	
1	PMO-2	285	

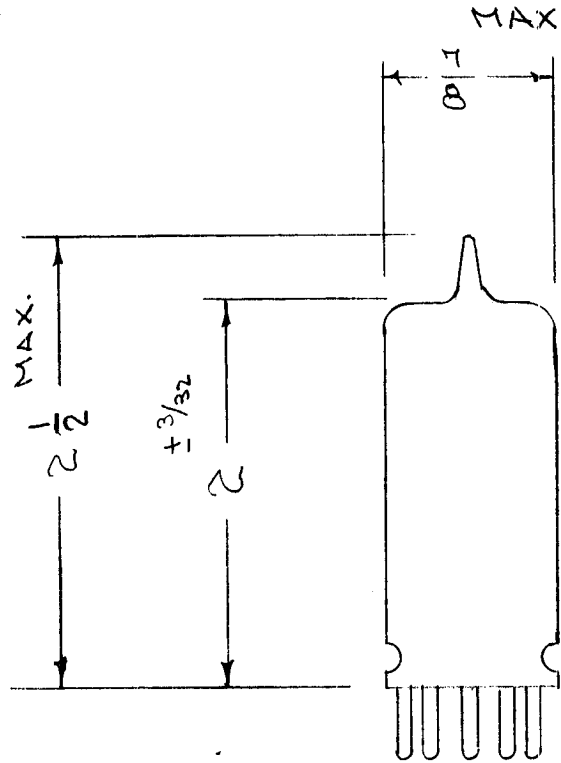

SUPPLY VOL. VARIATION 10.1 TO 15.1-V.
 DESIRED ON TUBES 6.2 TO 6.6-V.
 REQ. ON AMPERITE 4.3 TO 8.5-V.
 CURRENT .43 TO .49 A.
 BULB T6-1/2
 BASE 9 PIN NOVAL
 BASE WIRING PINS 2-7

DIM. FOR REF. ONLY

REF: AMPERITE CO. INC. AHTFA

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
STOCK SIZE			TUBE, BALLAST	
MATERIAL		WEIGHT PER PC.		
TYPE & TEMPER			CD.D. 8-27-54	A. J. J. <i>WJC</i>
HEAT TREAT. SPEC.			DRAWN	ELEC. DES. APP. MECH. DES. APP.
FINISH & SPEC. NO.			CHECKED <i>faw</i>	FINAL APPROVAL A. J. J.

A	2 1/2 MAX. WAS 2 3/8, 4.3V WAS 3.9	12-18-64	13104	HCA	<i>[Signature]</i>	<i>[Signature]</i>	
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE				
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					

RR-109 A